


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
12-200.DC2

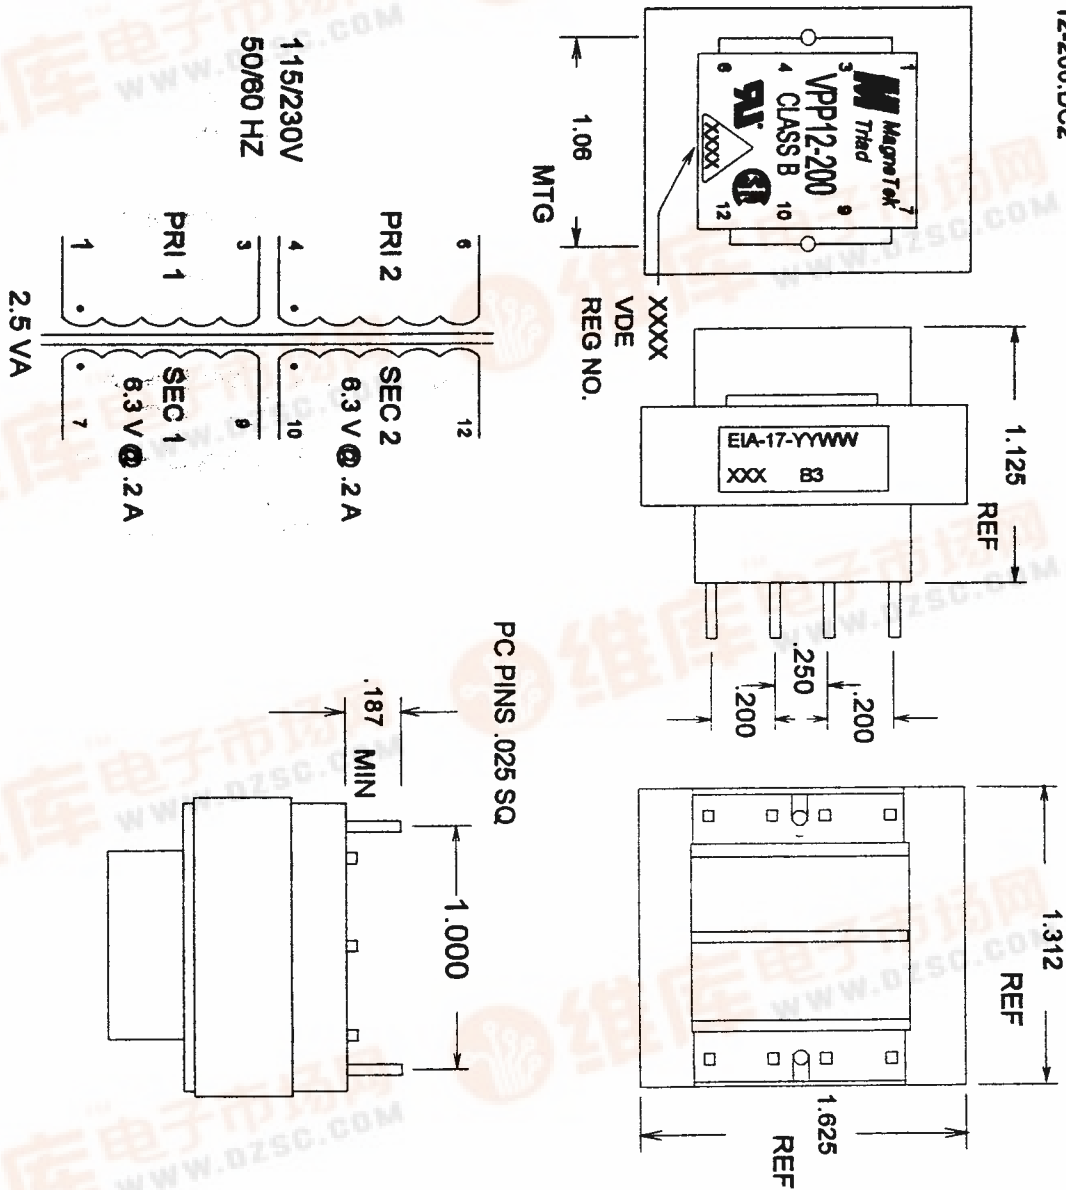

METHOD 1X1 MARKING SEE LABEL DETAIL ABOVE
LEAVE OFF LAST 4 PCS ON APPLY PART NO. LABEL AFTER IMPREGNATION

PRODUCTION TESTS

TURN RATIO = 100%

DC	1-3 =	723 NOM
RESISTANCE	4-6 =	902 NOM
IN OHMS	7-9 =	4.1 NOM
	10-12 =	5.1 NOM

MAX EXCITATION CURRENT = 0.008 A

APPLY 230V 60HZ 1-6 (3+4)

PRI WDGS 114.5 TO 115.5 V

SEC WDGS 8.1 TO 8.8 V

HIPOT: 4000V P-S

4000V P,S, TO CORE

600 V P-P, S-S

CONTINUITY = 100% PRI'S IN FINAL

IMPREGNATION: 2 HRS PREHEAT

PINS TO BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

MagneTek

VPP12-200