



TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

VPP36-1560.DC2

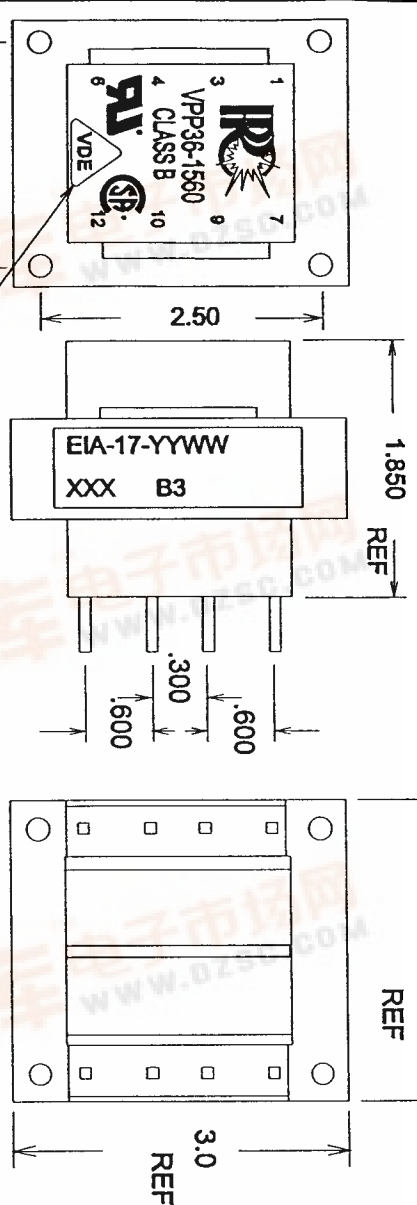

ALL MANUFACTURING SITES USE THIS MARK

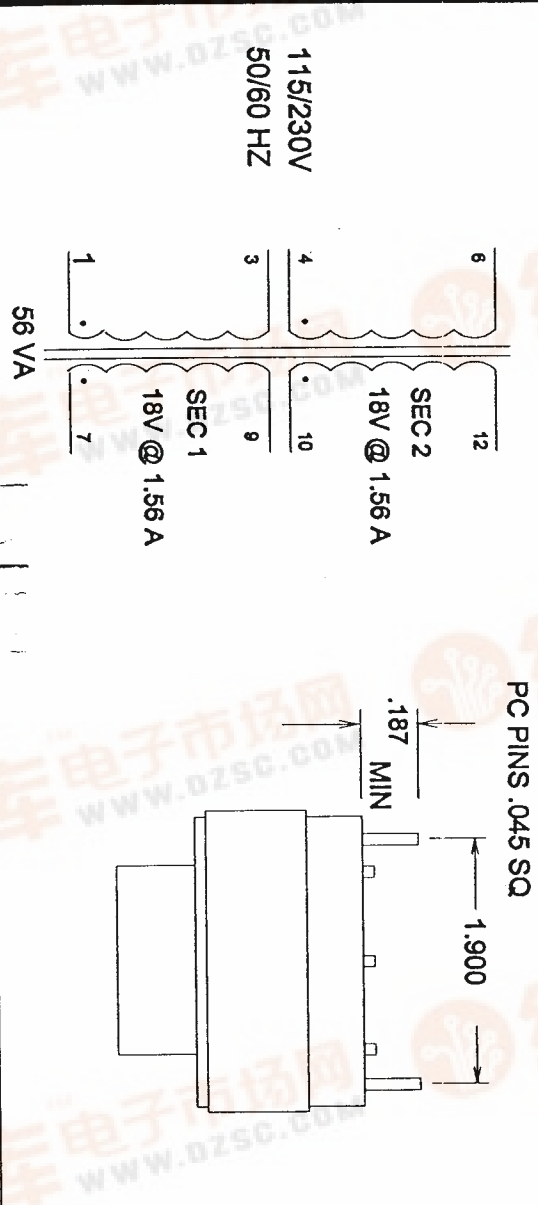

PRODUCTION TESTS

TURNS RATIO = 100%	
DC	1-3 = 21.5 NOM
RESISTANCE	4-6 = 26.5 NOM
IN OHMS	7-9 = .78 NOM
	10-12 = .95 NOM
MAX EXCITATION CURRENT = 75 MA	
APPLY 230V 60HZ 1-6 (3+4)	
PRI WDGS 114.5 TO 115.5 V	
SEC WDGS 20.7 TO 21.8 V	

HIPOT:	4000V P-S
	4000V P,S, TO CORE
	500V P-P, S-S

IMPREGNATION NOTES: PREHEAT 2 HRS
PINS TO BE FREE OF IMPREGNATION.

FINAL ASSEMBLY NOTES

METHOD 1 X 1
LEAVE OFF LAST "1" PCS

MARKING SEE LABEL DETAIL ABOVE
APPLY PART NO. LABEL, AFTER IMPREGNATION



PART NO.: VPP36-1560

查询VPP36-1560供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

60
RK
LS

