
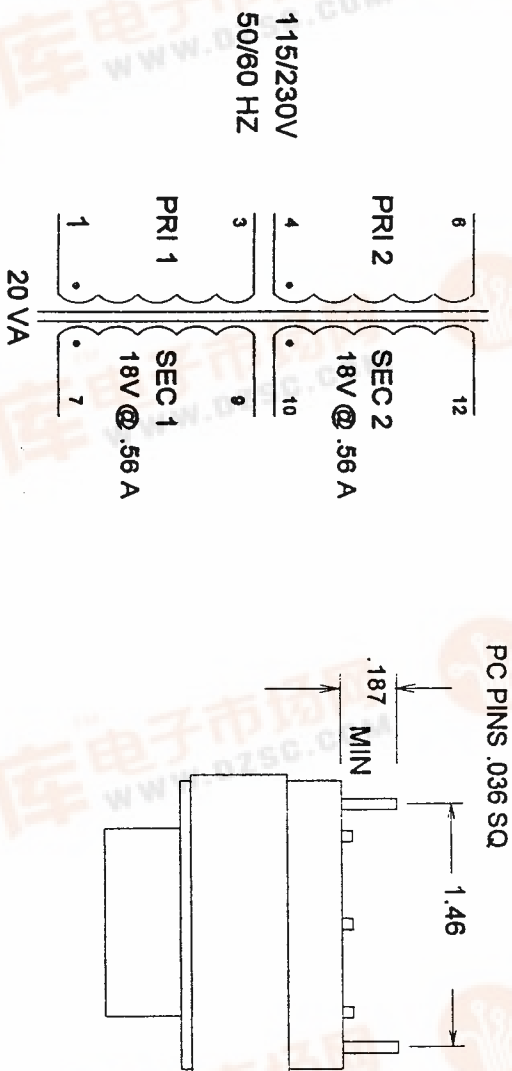


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

36-560.DC2

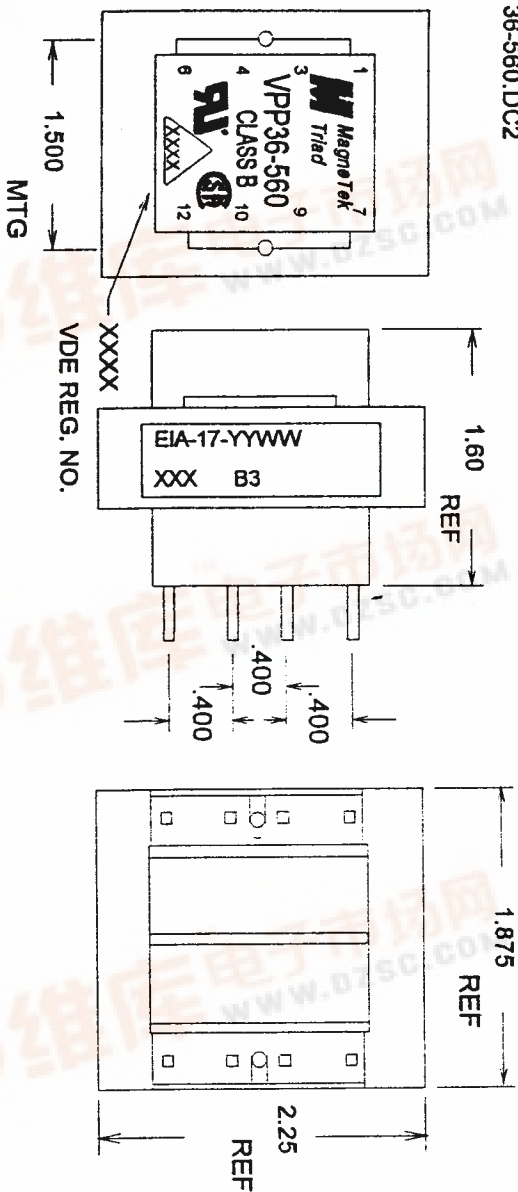

PRODUCTION TESTS

TURNS RATIO = 100%

DC	1-3 =	77 NOM
RESISTANCE	4-6 =	90 NOM
IN OHMS	7-9 =	2.85 NOM
	10-12 =	3.3 NOM

MAX EXCITATION CURRENT = 0.030 A

APPLY 230V 60HZ 1-6 (3+4)

PRI WDGS 114.5 TO 115.5 V

SEC WDGS 21.65 TO 21.95V

HIPOT: 4000V P-S

4000V P.S. TO CORE

600V P-P, S-S

IMPREGNATION NOTES: PREHEAT 2 HRS
PINS TO BE FREE OF IMPREGNATION.

FINAL ASSEMBLY NOTES

MagneTek

VPP36-560

METHOD 1 X 1

LEAVE OFF LAST "I" PCS

MARKING

SEE LABEL DETAIL ABOVE
APPLY PART NO. LABEL AFTER IMPREGNATION