

[查询1N6490US供应商](#)

[捷多邦，专业PCB打样工厂，24小时加急出货](#)

- AVAILABLE IN JAN, JANTX, JANTXV AND JANS PER MIL-PRF-19500/406
- 1.5 WATT ZENER DIODES
- NON CAVITY CONSTRUCTION
- METALLURGICALLY BONDED

1N6485US
THRU
1N6491US
AND
1N4460US
AND
1N4461US

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +200°C
Power Dissipation: 1.5W @ $T_A = +25^\circ\text{C}$
Power Derating: 10mW/°C above $T_A = +25^\circ\text{C}$
Forward Voltage: 1.0V dc @ $I_F = 200\text{mA}$ dc
1.5 V dc @ $I_F = 1\text{A}$ dc

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified

TYPE	ZENER VOLTAGE (NOM.) ±5%	TEST CURRENT I_{ZT}	DYNAMIC IMPEDANCE (MAX.) $Z_{ZT}@I_{ZT}$	KNEE IMPEDANCE (MAX.) $Z_{ZK}@I_{ZT}$	TEST CURRENT I_{ZK}	REVERSE CURRENT (MAX.) $I_R@V_R$	TEST VOLTAGE V_R	MAXIMUM CURRENT I_{ZM}	V_Z (REG) ΔV_Z	MAXIMUM SURGE
	VOLTS	mA	OHMS	OHMS	mA	μA	VOLTS	MA	VOLTS	AMPS
1N6485US	3.3	76.0	10	400	1.0	50	1.0	433	.90	4.2
1N6486US	3.6	69.0	10	400	1.0	50	1.0	397	.80	3.9
1N6487US	3.9	64.0	9	400	1.0	35	1.0	366	.75	3.6
1N6488US	4.3	58.0	9	400	1.0	5.0	1.0	332	.70	3.3
1N6489US	4.7	53.0	8	500	1.0	4.0	1.0	304	.60	3.0
1N6490US	5.1	49.0	7	500	1.0	1.0	1.0	280	.50	2.7
1N6491US	5.6	45.0	5	600	1.0	0.5	2.0	255	.40	2.5
1N4460US	6.2	40.0	4	200	1.0	10.0	3.72	230	.35	2.3
1N4461US	6.8	37.0	2.5	200	1.0	5.0	4.08	210	.30	2.1

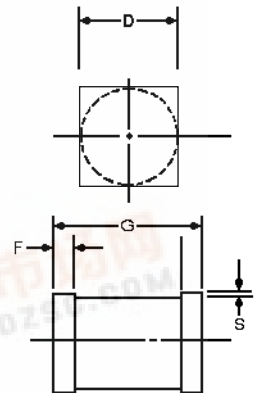


FIGURE 1

DESIGN DATA

CASE: D-5A, hermetically sealed glass case, per MIL-PRF- 19500/406

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ($R_{\theta JC}$):
20 °C/W maximum at L = 0

THERMAL IMPEDANCE: ($Z_{\theta JX}$): 4.5
°C/W maximum

POLARITY: Diode to be operated with the banded (cathode) end positive.

MOUNTING SURFACE SELECTION:
The Axial Coefficient of Expansion (COE) of this device is approximately + 4PPM / °C. The COE of the Mounting Surface System should be selected to provide a suitable match with this device.



COMPENSATED DEVICES INCORPORATED


22 COREY STREET, MELROSE, MASSACHUSETTS 02176

PHONE (781) 665-1071

FAX (781) 665-7270

1N6485US thru 1N6491US and 1N4460US and 1N4461US

FIGURE 2

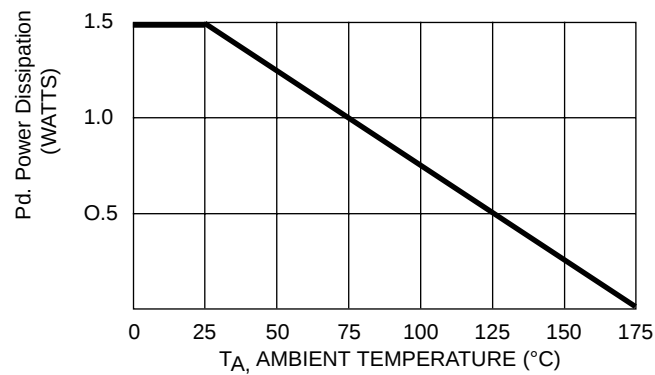

POWER DERATING CURVE

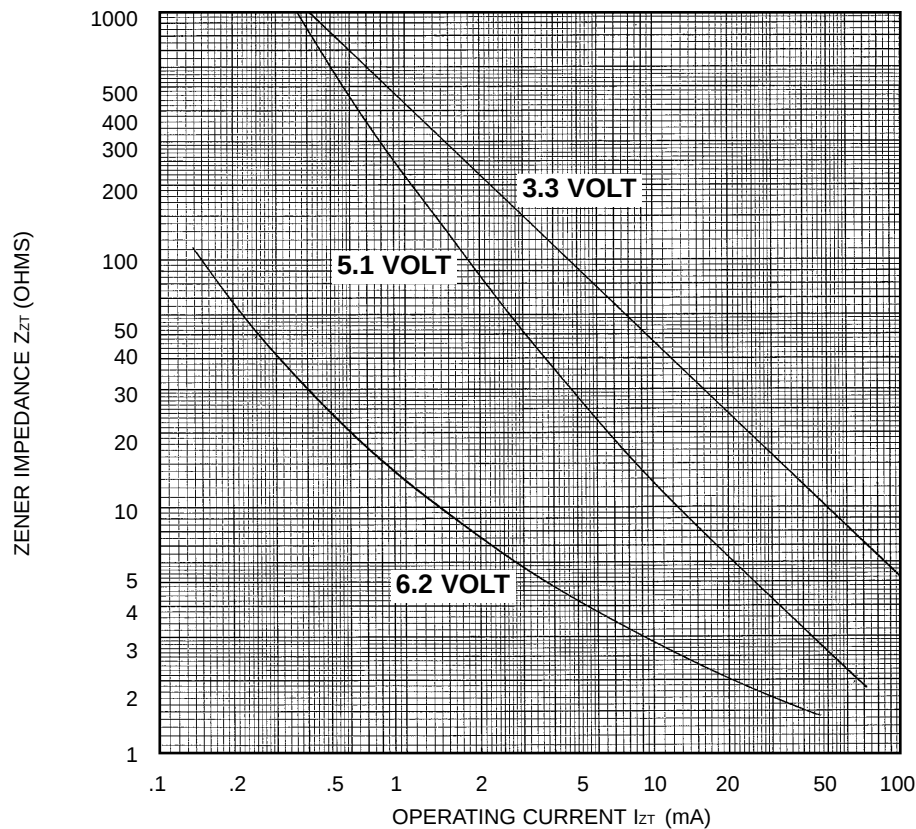


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT