



7516 Central Industrial Drive
Riviera Beach, FL 33404
PH: 561-842-0305
Fax: 561-845-7813

1N6840 AND 1N6841


DESIGNER'S DATA SHEET

FEATURES:

- Low Profile Ceramic SMD
- High Surge Rating
- Low Reverse Leakage Current
- Low Forward Voltage
- Seam Welded Package
- Low Capacitance
- Ultrasonic Aluminum Wire Bonds

35 and 45 VOLTS, 10 AMP
DUAL SCHOTTKY
COMMON CATHODE
CENTERTAP RECTIFIER

SMD-0.5

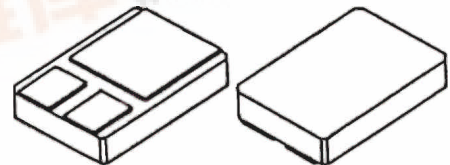

MAXIMUM RATINGS (per leg)

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage 1N6840 1N6841	V_{RRM} V_{RWN} V_R	 35 45	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, $T_A = 25^\circ\text{C}$)	I_o	10	Amps
Peak Surge Current (8.3 ms Pulse, $T_A = 25^\circ\text{C}$, per leg)	I_{FSM}	200	Amps
Operating & Storage Temperature	Top & Tstg	-55 to +150	$^\circ\text{C}$
Maximum Thermal Resistance Junction to Case, each individual diode Junction to Case <i>Note 1</i>	$R_{\theta JC}$	2.8 1.7	$^\circ\text{C} / \text{W}$

Note 1: Both legs tied together


8/2/99

pdf.dzsc.com

ELECTRICAL CHARACTERISTICS (per leg)

CHARACTERISTICS	SYMBOL	MAX.	UNIT
Instantaneous Forward Voltage Drop ($I_F = 3 \text{ Adc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 10 \text{ Adc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 20 \text{ Adc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse)	V_F	0.62 0.75 0.88	Vdc
Instantaneous Forward Voltage Drop ($I_F = 10 \text{ Adc}$, $T_A = 100^\circ\text{C}$, 300 μs Pulse) ($I_F = 20 \text{ Adc}$, $T_A = 100^\circ\text{C}$, 300 μs Pulse)	V_F	0.63 0.70	Vdc
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$, 300 μs pulse minimum)	I_R	100	μA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ\text{C}$, 300 μs pulse minimum)	I_R	10	mA
Junction Capacitance ($V_R = 10\text{Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$)	C_J	400	Pf

CASE OUTLINE: SMD-0.5

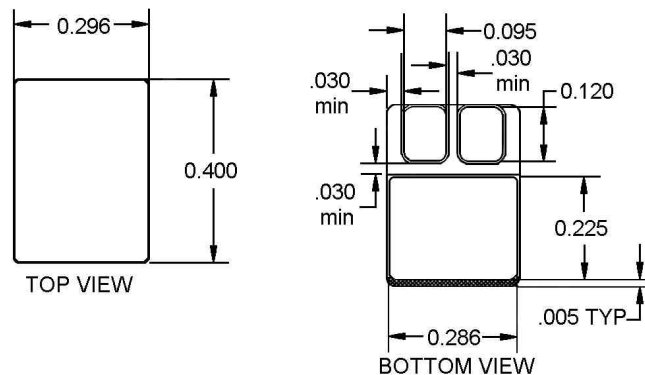

TYPICAL OPERATING CURVES
($T_A = 25^\circ\text{C}$ Unless otherwise specified)

