


Series 1331

Shielded Surface Mount Inductors

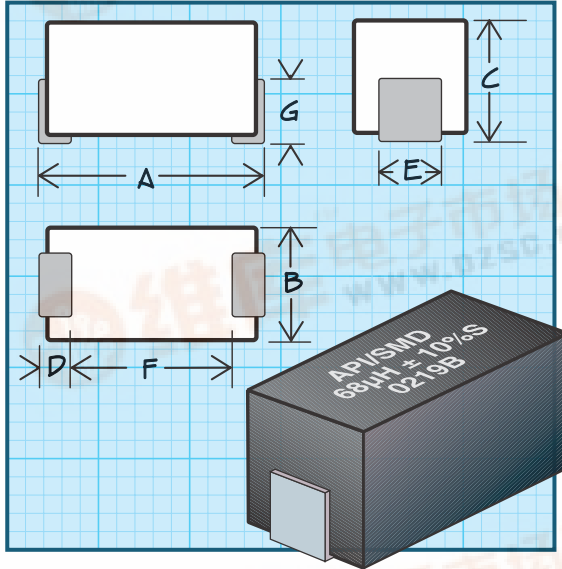

Military QPL Approvals

M83446/34 Iron Core/Iron Sleeve

M83446/34 Iron Core/Ferrite Sleeve

M83446/35 Ferrite Core/Ferrite Sleeve

*** Ordering Note** Military parts must be ordered to the M83446/ part number

Physical Parameters

	Inches	Millimeters
A	0.300 to 0.325	7.62 to 8.26
B	0.105 to 0.125	2.67 to 3.18
C	0.125 to 0.145	3.18 to 3.68
D	0.020 Min.	0.508 Min.
E	0.040 to 0.060	1.02 to 1.52
F	0.190 (Ref. only)	4.83 (Ref. only)
G	0.070 (Ref. only)	1.78 (Ref. only)

Dimensions "A" and "C" are over terminations

Weight Max (Grams) 0.30

Operating Temperature Range -55°C to +105°C

Current Rating at 90°C Ambient 15°C Rise

Maximum Power Dissipation at 90°C 0.585 W

Incremental Current Current level which causes a maximum of 5% decrease in inductance.

Coupling 3% Max.

*** Note** Self Resonant Frequency (SRF) values for -101 to 331 are calculated and for reference only.

Packaging Tape & reel (16mm): 7" reel, 500 pieces max.; 13" reel, 2200 pieces max.

Made in the U.S.A. Patent Protected

PART NUMBER*	MIL DASH #	INDUCTANCE (μ H) $\pm 10\%$	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)	INCREMENTAL CURRENT (mA)
--------------	------------	-------------------------------------	-----------	----------------------	-------------------	---------------------------------	--------------------------------	-----------------------------

SERIES 1331 IRON CORE - IRON SLEEVE								
1331-101K	01F	0.10	45	25.0	490.0*	0.10	670	670
1331-121K	02F	0.12	45	25.0	430.0*	0.11	635	635
1331-151K	03F	0.15	45	25.0	415.0*	0.12	610	610
1331-181K	04F	0.18	45	25.0	375.0*	0.13	585	585
1331-221K	05F	0.22	45	25.0	330.0*	0.15	545	545
1331-271K	06F	0.27	45	25.0	300.0*	0.16	530	530
1331-331K	07F	0.33	44	25.0	260.0*	0.18	495	495
1331-391K	08F	0.39	42	25.0	230.0	0.19	485	485
1331-471K	09F	0.47	41	25.0	220.0	0.21	460	460
1331-561K	10F	0.56	41	25.0	210.0	0.23	440	440
1331-681K	11F	0.68	39	25.0	180.0	0.24	430	430
1331-821K	12F	0.82	38	25.0	165.0	0.27	405	405
1331-102K	13F	1.00	37	25.0	150.0	0.30	385	385
1331-122K	14F	1.20	40	7.9	130.0	0.73	247	247
1331-152K	15F	1.50	41	7.9	115.0	0.86	228	228
1331-182K	16F	1.80	43	7.9	105.0	0.95	217	217
1331-222K	17F	2.20	45	7.9	95.0	1.10	202	202
1331-272K	18F	2.70	48	7.9	90.0	1.20	193	193
1331-332K	19F	3.30	49	7.9	80.0	1.30	185	185
1331-392K	20F	3.90	50	7.9	75.0	1.50	173	173
1331-472K	21F	4.70	50	7.9	70.0	2.40	136	136
1331-562K	22F	5.60	50	7.9	60.0	2.90	124	124
1331-682K	23F	6.80	50	7.9	55.0	3.20	118	118
1331-822K	24F	8.20	50	7.9	53.0	3.60	111	111
1331-103K	25F	10.0	50	7.9	50.0	4.00	106	106

SERIES 1331 IRON CORE - FERRITE SLEEVE								
1331-123K	26F	12.0	36	2.5	35.0	3.00	122	122
1331-153K	27F	15.0	38	2.5	30.0	3.40	115	115
1331-183K	28F	18.0	40	2.5	26.0	3.80	108	108
1331-223K	29F	22.0	40	2.5	24.0	4.90	96	96
1331-273K	30F	27.0	40	2.5	21.0	5.80	88	88
1331-333K	31F	33.0	41	2.5	20.0	6.50	83	83
1331-393K	32F	39.0	42	2.5	19.0	7.90	75	75
1331-473K	33F	47.0	44	2.5	16.0	9.30	69	69
1331-563K	34F	56.0	44	2.5	15.0	11.0	64	64
1331-683K	35F	68.0	45	2.5	13.0	12.0	61	61
1331-823K	36F	82.0	45	2.5	11.0	13.0	59	59
1331-104K	37F	100.0	40	2.5	10.5	16.8	51	51

SERIES 1331 FERRITE CORE - FERRITE SLEEVE								
1331-124K	01F	120.0	31	0.79	13.0	5.80	88	27
1331-154K	02F	150.0	33	0.79	12.0	7.90	75	24
1331-184K	03F	180.0	33	0.79	11.0	9.40	69	22
1331-224K	04F	220.0	35	0.79	10.0	11.0	64	20
1331-274K	05F	270.0	35	0.79	9.0	12.0	61	18
1331-334K	06F	330.0	35	0.79	8.0	16.0	53	16
1331-394K	07F	390.0	35	0.79	7.8	21.0	46	14
1331-474K	08F	470.0	35	0.79	7.5	24.0	43	13
1331-564K	09F	560.0	35	0.79	7.0	28.0	40	12

Optional Tolerances: J = 5% H = 3%

