



TM99AE

ADSL MAGNETICS
International Transformer


- Approved for an ADSL transceiver used with Globespan chip set
- Meets the specifications for IEC-950, necessary for European applications
- Provides a minimum creepage and clearance distance of 2.5 mm
- Operating temperature range of -40°C to $+85^{\circ}\text{C}$
- UL, CSA, BABT and VDE approved
- Minimum interwinding breakdown voltage of 3000 Vrms

ELECTRICALS at 25° C

Part Number	Turns Ratio $\pm 3\%$	Primary Inductance* $\mu\text{H min}$	Leakage Inductance $\mu\text{H max}$	DCR Ω max		Interwinding Capacitance pF max
	Sec : Pri			Pri	Sec	
2776D	1.0 : 0.714	475	10.0	1.6	3.8	25

* Measured at 10 kHz, 0.1 Vac

SCHEMATIC

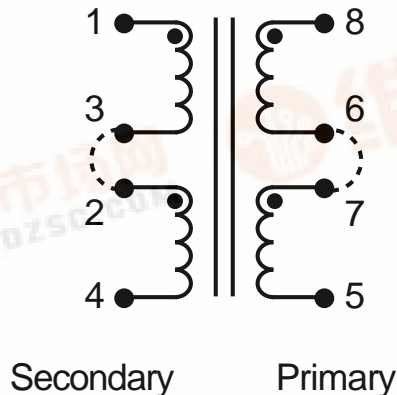






TM99AE

ADSL MAGNETICS International Transformer

MECHANICAL

2776D

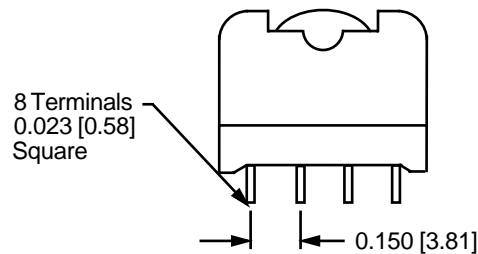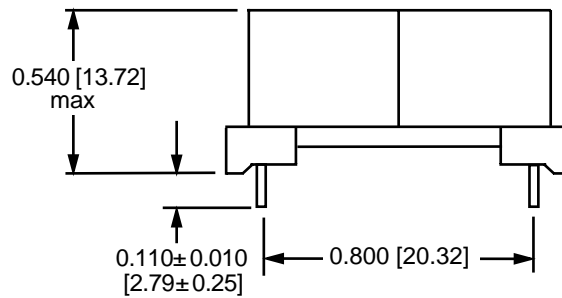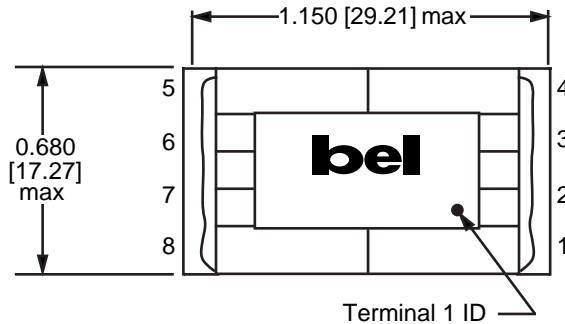

Note: Unless otherwise specified, dimensions are nominal and in inches [millimeters].

©1999 Bel Fuse Inc. Specifications subject to change without notice.

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F23, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com