

LAN

查询7317供应商

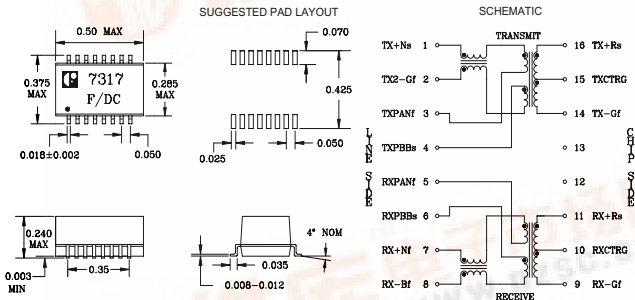
10/100 BASE-T
Magnetic Module捷多邦, 专业
7317 PCB打样上

, 24小时加急出货

- Compliant with IEEE 802.3 and ANSI X3.263 standards including 350 μ H OCL with 8mA bias
- 1500 Vrms isolation
- 16 pin, low profile SMD isolation module
- Used for 100MHz token ring applications



Mechanical and Schematic (All dimensions in inches)

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS AS FOLLOWS: .XX $\pm$ 0.01, .XXX $\pm$ 0.005

ELECTRICAL SPECIFICATION @ 25°C

Part Number	Turns' Ratio ($\pm 3\%$)	L_L^2 (μ H MAX)	C_{WV}^{WV} (pF MAX)	Insertion Loss (dB MAX)	Return Loss (dB MIN)		Crosstalk (dB MIN)	CM to CM Rej. (dB MIN)	CM to DM Rej. (dB MIN)
		1MHz, 20Vrms	1MHz, 20Vrms	100kHz-80MHz	100kHz-30MHz	30MHz-60MHz	60MHz-80MHz	100kHz-100MHz	100kHz-100MHz
7317	1:1	200	30	-1	-16	-14	-10	-35	-30

- PIN (1-3), (4-2), (16-15-14); PIN (7-5): (6-8): (11-10-9)
- PIN (16-14) short 1-3 & 2-4; PIN (11-9) short 6-8 & 5-7
- PIN (1-3) to (16-14); PIN (6-8) to (11-9)