


8L00 Series/Spartan DIP Reed Relays

NEW!

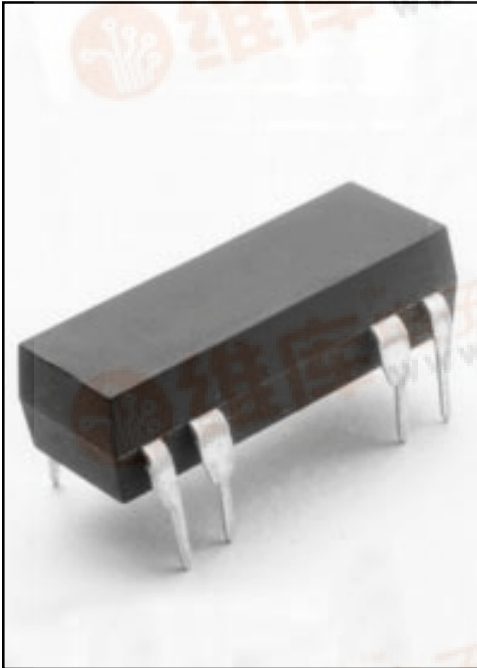


ECONOMY DIP REED RELAYS

The Coto 8L00 Spartan Series relays combine Coto quality and economy in the industry standard 14 pin molded DIP package. This series will cross to all competitive DIP packages and is ideal for telecom, security, and other general purpose applications.

8L00 SERIES FEATURES

- ◆ Drop-in low cost replacement for industry standard DIP packages.
- ◆ Available in Form 1A, 1C, 2A and 1B packages and 5, 12, and 24 V coil designs.
- ◆ Molded thermoset body on integral lead frame design.
- ◆ Hermetically Sealed Contacts.
- ◆ Optional Electrostatic Shield and Coil Suppression Diode.

Dimensions in Inches
(Millimeters)

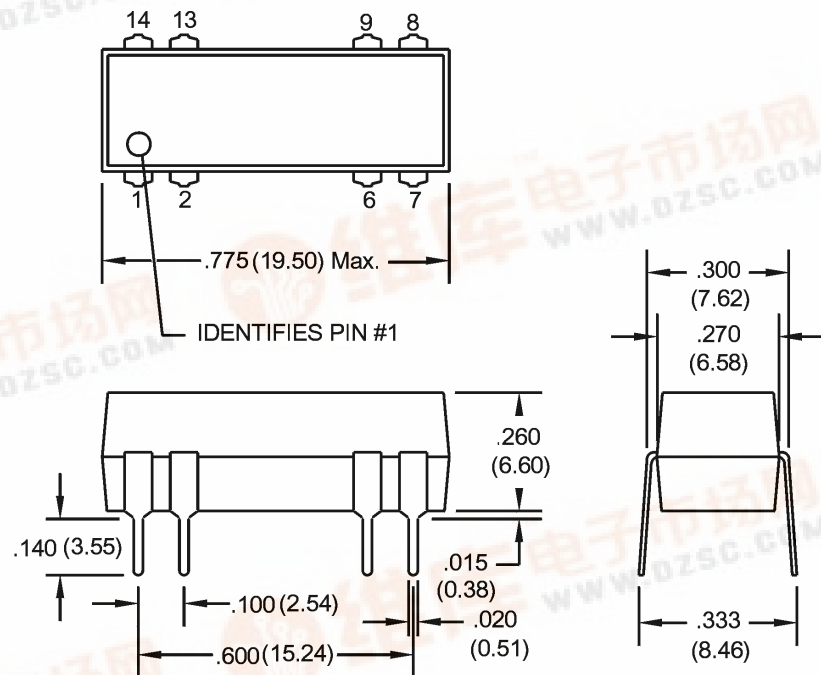

Ordering Information

Part Number	8LXX-XX-XX1
Model Number	Diode Option
8L01 8L41	0=No Diode 1=Diode
Coil Voltage	Shield Option
05=5 volts	0=No Shield
12=12 volts	1=Electrostatic Shield

Ordering Information

Part Number	8LXX-XX-XX
Model Number	Diode Option ³
8L02 8L21	0=No Diode 1=Diode
Coil Voltage	Shield Option
05=5 volts	0=No Shield
12=12 volts	1=Electrostatic Shield

8L00 Series/Spartan DIP Reed Relays

Model Number

Parameters

Test Conditions

Units

8L01

8L02

8L21

8L41

1 Form A

2 Form A

1 Form B

1 Form C

COIL SPECS.

Nom. Coil Voltage		VDC	5	12	24	5	12	24	5	12	24	5	12	24
Max. Coil Voltage		VDC	6.5	15	32	6.5	15	32	6.5	15	32	6.5	15	32
Coil Resistance	+/- 10%, 25° C	Ω	500	500	2150	200	500	2000	200	500	2000	200	500	2000
Operate Voltage	Must Operate by	VDC - Max.	3.8	9.6	19.2	3.8	9.6	19.2	3.8	9.6	19.2	3.8	9.6	19.2
Release Voltage	Must Release by	VDC - Min.	0.5	1.0	2.0	0.5	1.0	2.0	0.5	1.0	2.0	0.5	1.0	2.0

CONTACT RATINGS


Switching Voltage	Max DC/Peak AC Resist.	Volts	200			200			200			100		
Switching Current	Max DC/Peak AC Resist.	Amps	0.5			0.5			0.5			0.25		
Carry Current	Max DC/Peak AC Resist.	Amps	1.0			1.0			1.0			0.5		
Contact Rating	Max DC/Peak AC Resist.	Watts	10			10			10			3		
Life Expectancy-Typical ¹	Signal Level 1.0V,10mA	x 10 ⁶ Ops.	500			500			500			100		
Static Contact Resistance (max. init.)	50mV, 10mA	Ω	0.150			0.150			0.150			0.200		
Dynamic Contact Resistance (max. init.)	0.5V, 50mA at 100 Hz, 1.5 msec	Ω	N/A			N/A			N/A			N/A		

RELAY SPECIFICATIONS

Insulation Resistance (minimum)	Between all Isolated Pins at 100V, 25°C, 40% RH	Ω	10 ¹⁰			10 ¹⁰			10 ⁹			10 ⁹		
Dielectric Strength (minimum)	Between Contacts	VDC/peak AC	250			250			250			250		
	Contacts to Shield	VDC/peak AC	1500			1500			1500			1500		
	Contacts/Shield to Coil	VDC/peak AC	1500			1500			1500			1500		
Operate Time - including bounce - Typical	At Nominal Coil Voltage, 30 Hz Square Wave	msec.	0.5			0.5			0.5			1.0		
Release Time - Typical	No Suppression	msec.	0.5			0.5			0.5			1.0		
	Diode Suppression	msec.	1.0			1.0			1.0			1.5		

Top View:

Dot stamped on top of relay refers to pin #1 location
Grid = .1"x.1" (2.54mm x 2.54mm)

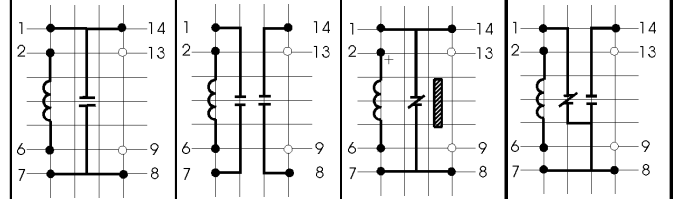

Notes:

Molded Depression on top of relay refers to pin #1 location.

Optional coil suppression diode across pins 2(+) and 6(-).

Optional ES shield is tied to pins 9 and 13

Environmental Ratings

Storage Temp: -35 °C to +100 °C; Operating Temp: -20 °C to + 85 °C
The operate and release voltage and the coil resistance are specified at 25 °C. These values vary by approximately 0.4%/°C as the ambient temperature varies.

Vibration: 20 G's to 2000 Hz; Shock: 50 G's