

RJ-45/USB

查询8321供应商

10/100 BASE-T Module
with Dual USB

捷多邦, 专业

8321-8323



PCB打样厂

, 24小时加急出货

- Complies with IEEE standards and all 10/100 Ethernet specifications including 350pH with 8mA DC bias
- Various turns ratio options available
- Integrated Mag-modular design provides higher reliability and conserves minimizing PCB space
- Various LED options available
- Single port shield RJ-45 with dual USB
- Operating temperature: -40°C to +85°C



Mechanical and Schematic (All dimensions in inches)

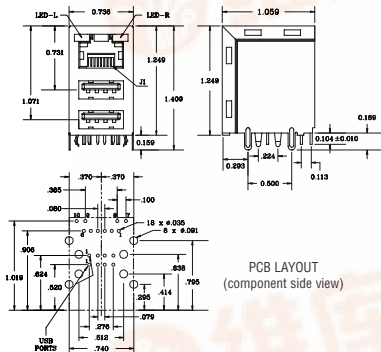

Part Number	Description	
	LED-L	LED-R
8321	Yellow	Green
8322	Green	Yellow
8323	Green	Green

ELECTRICAL SPECIFICATION @ 25°C

Transmitter Filter				Receiver Filter			
Insertion Loss dB MAX	Return Loss dB MIN (load 100 Ω)			Insertion Loss dB MAX	Return Loss dB MIN (load 100 Ω)		
1-100 MHz	1-30 MHz	30-60 MHz	60-80 MHz	1-100 MHz	1-30 MHz	30-60 MHz	60-80 MHz
-20	-15	-11	-1.0	-20	-17	-15	-15

- Common Mode Rejection @ 1-100 MHz: -30dB MIN
- Crosstalk @ 1-100 MHz: -30dB MIN
- Primary Inductance @ 100kHz, 0.1Vrms, 8mA DC Bias (2-3), (4-5): 350pH MIN
- Isolation Input (2-3) to Output (1-2): 1500Vrms, 1.0mA, 1sec
- Isolation Input (4-5) to Output (3-6): 1500Vrms, 1.0mA, 1sec