


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

FCI

Reproduction or issue to third parties in any form without written authority from the proprietor. Copyright FCI.

PDF 找一下 pdf.dzsc.com

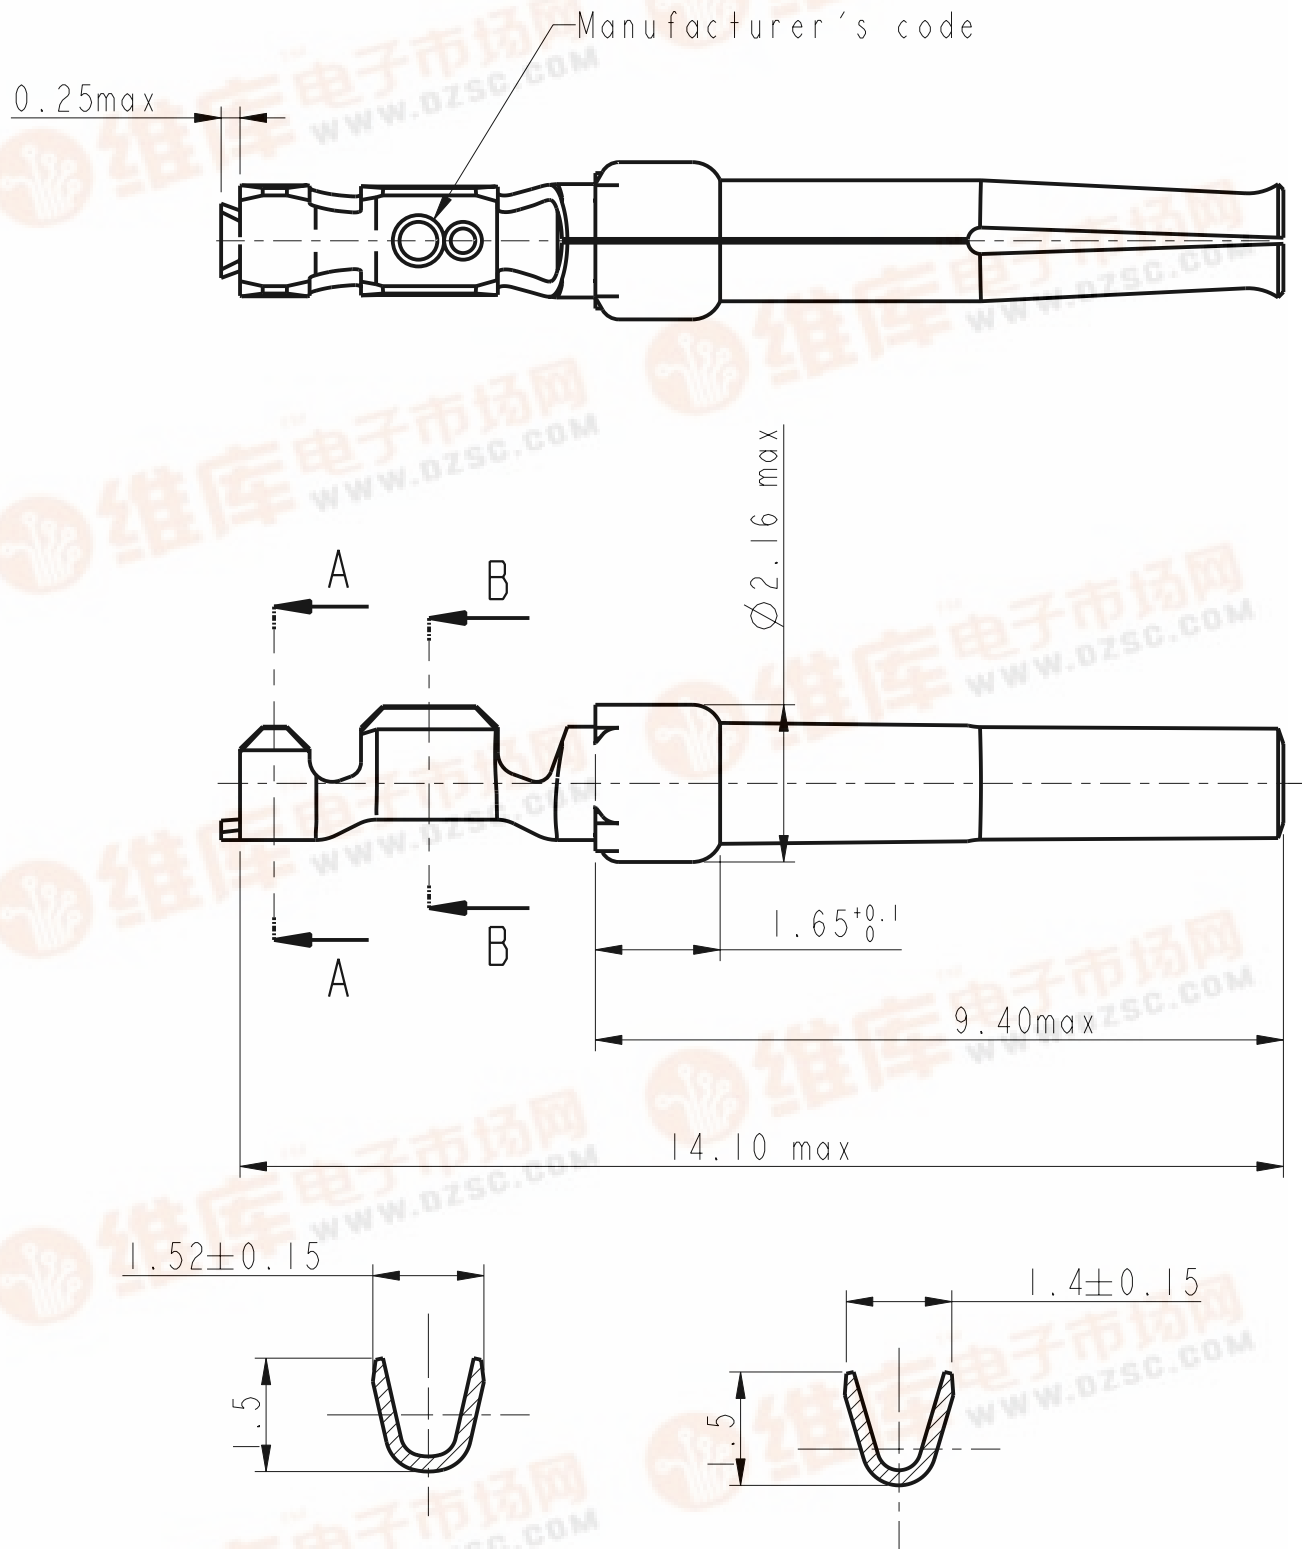

SECTION A-A

SECTION B-B


NOTES:

- 1-Material:phosphor bronze,thickness 0.20
- 2-Finish on contact area:see table
finish on termination:bright tin lead over nickel
- 3-Wire range:24 to 28 AWG
- 4-Max outer dia of wire insulator:1.02 mm
- 5-Current carrying capacity per contact:
3.Amps max when crimped to #24 AWG
2 Amps max when crimped to #26 AWG
1 Amps max when crimped to #28 AWG
- 6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 24 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
- 6-Packaging:BOX of 500 contacts

NOTE : ROHS INFORMATION

The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-930

Core range	-
8656351064LF	Flash Au
8656351064	Flash Au
PART NUMBER	Plating

A FCI www.fciconnect.com			surface - ✓		tolerance		projection 			
Dr	C JARRY	28/01/97	Product family -			size A3		Scale 10:1		
Eng			Spec ref							
Chr			Material			SEE NOTES		ECN		
Appr										
title					CRIMP SOCKET					
					#Wire 24-28 in bos 500 cts					
					dwg no		C01-8656-1507			
							Rev. D			

l tr	ecn no	dr	date
D	LS05-006	MPE	25/06/05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-