

SERIES **800B** SWITCHES

SEALED SUB-MINIATURE PUSHBUTTON SWITCHES


**SPECIFICATIONS**

Contact Rating:	0.4 VA max. @ 20 VAC or DC max.
Electrical Life:	50,000 make-and-break cycles at full load
Contact Resistance:	20 mΩ typical initial @ 2-4 VDC, 100 mA
Insulation Resistance:	10 ⁹ ohm min.
Dielectric Strength:	1,000 V RMS @ sea level.
Operating Temperature:	-30° C to 85° C
Packaging:	Tape & Reel



MATERIALS

Case & Bushing:	High temperature material, glass filled 4/6 Nylon, flame retardant, heat stabilized (UL94-V0)
Plunger:	High temperature material, glass filled Nylon 4/6, flame retardant, heat stabilized (UL94-V0) Internal O-Ring seal standard.
Switch Support:	Brass/Steel, tin or tin-lead plated.
Contacts / Terminals:	Gold plate over nickel plated copper alloy.
Terminal Seal:	Epoxy


HOW TO ORDER

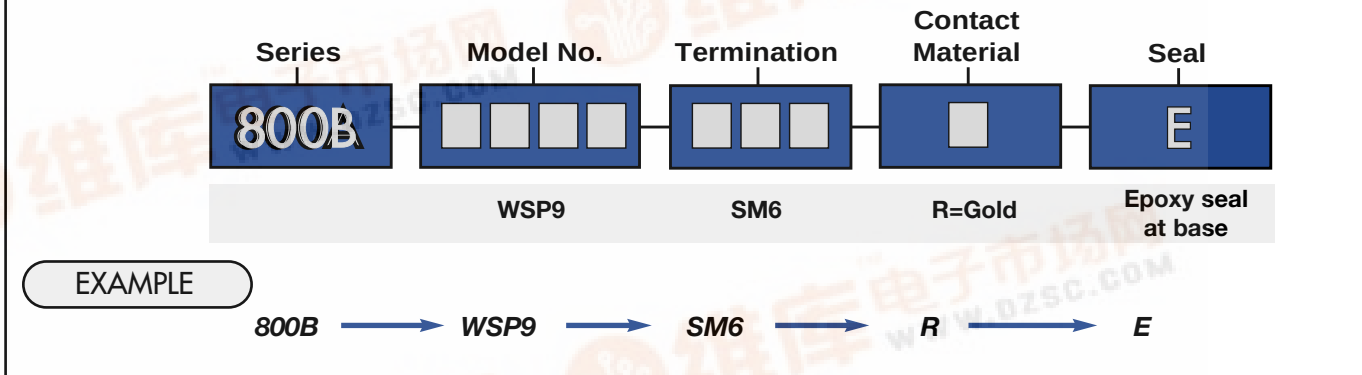

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

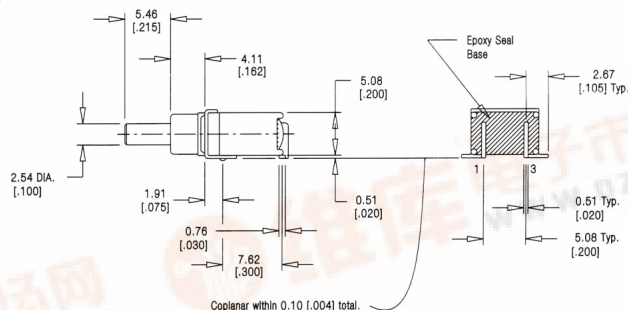

P.C. MOUNTING

**Schematic**