

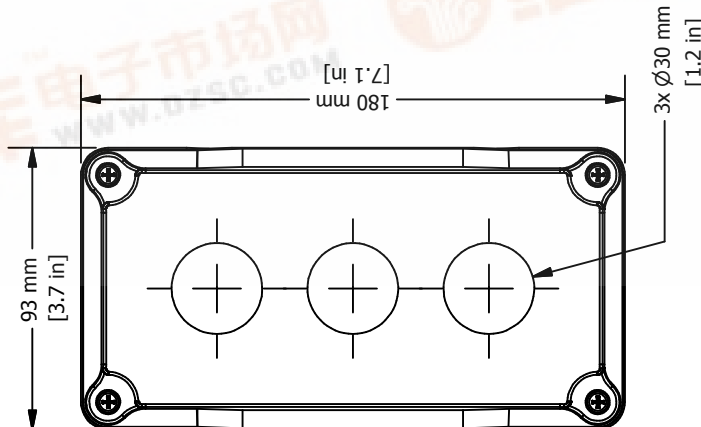
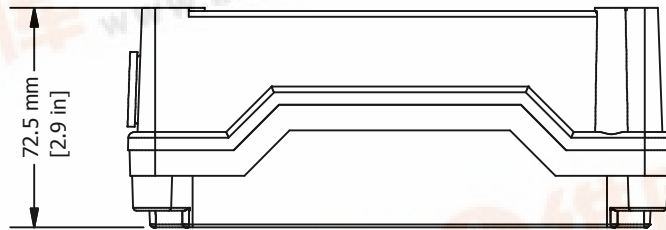
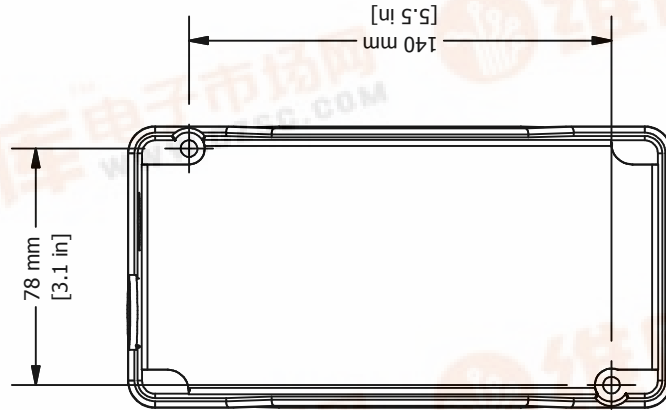


REVISION FOR DWG # 1PB-1005E13

REV	CH.NO.	DESCRIPTION	DATE	REVISED BY
-	-	ORIGINAL DESIGN	11/6/2007	PHILIPP E.

查询1007E13供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

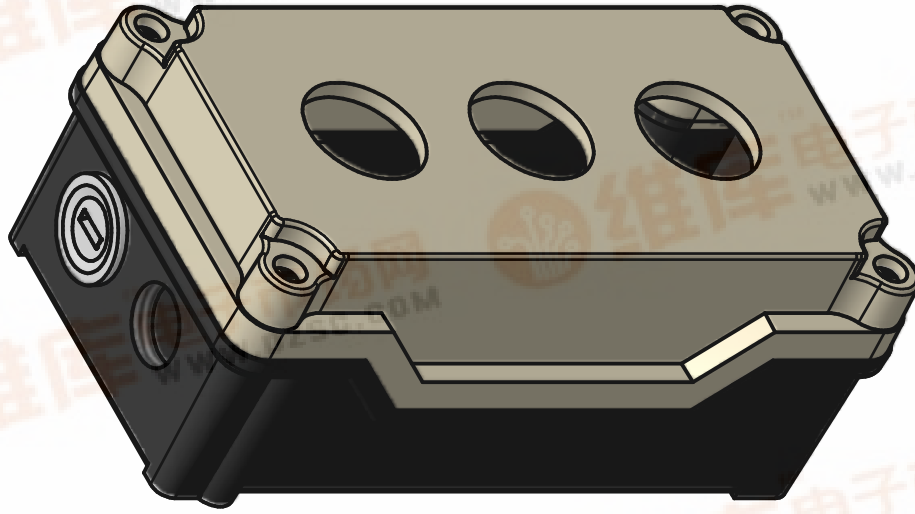

2 contact blocks can be used with an illuminated operator. 4 contact blocks can be used with any non-illuminated operator.

TITEL 30 mm Aluminum Gravity Die Cast Enclosure 1005E13 (cable entry thread size: 2xM20) and 1007E13(cable entry thread size: 2x1/2"-14 NPT)

AND IS A CONFIDENTIAL DISCLOSURE WITHOUT CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.

Altech Corp.
35 Royal Road
Flemington, NJ 08822-6000
(908) 806-9400
Fax (908) 806-9490

THIS DRAWING IS THE PROPERTY OF
Altech Corp.
METER-C
UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN MILLIMETERS
3RD ANGLE PROJECTION
TOLERANCE = ±1 mm
X = ±0.5 mm
.XX = ±0.2 mm
L = - mm

DRAWN BY: Philip Ernstberger	11/6/2007	DRAWING NO.: 1PB-1005E13	REV.: -
CHECKED BY: Laszlo Gyorgypal	11/6/2007	SCALE: -	OF: 1
RELEASED BY: Laszlo Gyorgypal	11/6/2007	SHEET: 1	OF: 1