
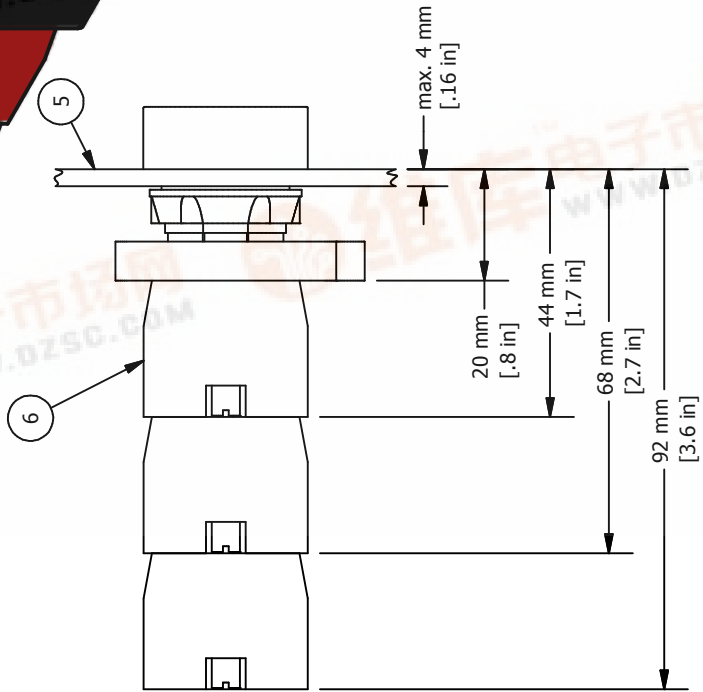
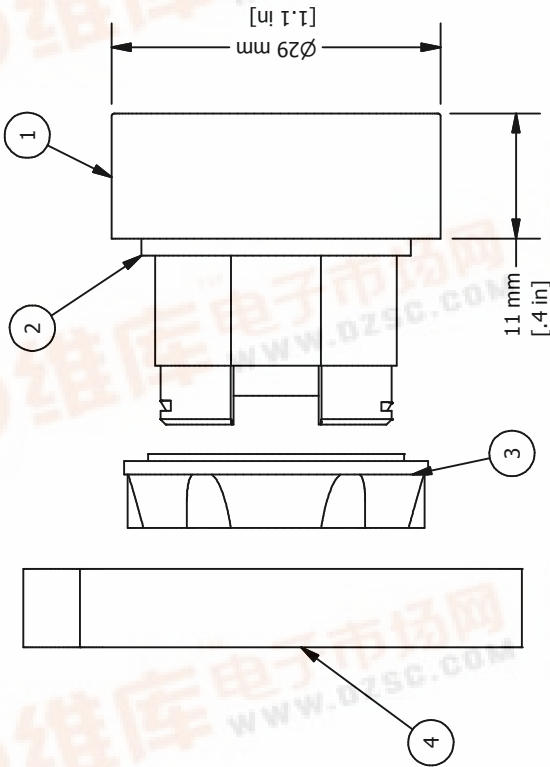


REVISION FOR DWG # 1PB-P2AFx			
REV	CH.NO.	DESCRIPTION	DATE
-	-	ORIGINAL DESIGN	11/5/2007
			PHILIPP E.

查询P2AFX供应商

Up to six switch contacts can be installed.

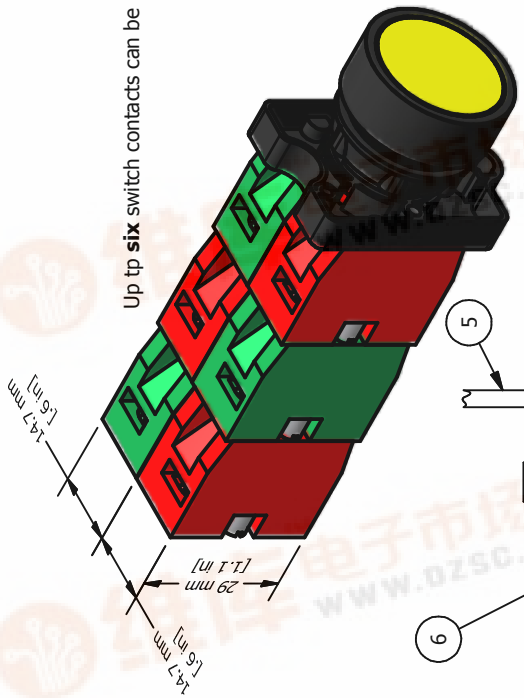

Push button is supplied with rubber gasket, mounting nut and mounting bracket (ITEM 1,2,3 and 4)
Switch Contacts must be ordered separately

ITEM	DESCRIPTION	CAT. NO.	COLOR	MIN. QTY.	MAX. QTY.
1*	Plastic Flush Operator (Momentary)	P2AF1	White	1	1
		P2AF2	Black	1	1
		P2AF3	Green	1	1
		P2AF4	Red	1	1
		P2AF6	Blue	1	1
2*	Rubber Gasket	2PRG1	Yellow	1	1
3*	Mounting Nut	P2MN	Black	1	1
4*	Mounting Bracket	P2BRK	Black	1	1
5	Panel	-	-	-	-
5**	Switch Contacts	S1	Green	1	1
		S2	Red	1	1
		S3	Green/Gray	1	1
		S4	Red/Gray	1	1

TITLE 22 mm Thermoplastic Enclosure Flush Momentary Operator P2AFx (x=color)			
DRAWN BY: Philipp Ernstberger	11/5/2007	DRAWING NO.: 1PB-P2AFx	REV.: -
CHECKED BY: Laszlo Gyorgypal			
RELEASED BY: Laszlo Gyorgypal		SCALE: -	SHEET: 1 OF: 1

AND IS A CONFIDENTIAL DISCLOSURE OTHER THAN THE CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.

Alttech Corp.
35 Royal Road
Flemington, NJ 08822-6000
(908) 806-9400
Fax (908) 806-9490

METRIC

LESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN MILLIMETERS
1/8" ANGLE PROJECTION

ANCE
= ±1 mm
X = ±0.5 mm
.XX = ±0.2 mm
L = - mm