

REVISIONS													
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED										
REV													
SHEET													
REV													
SHEET													
REV STATUS OF SHEETS	REV												
	SHEET	1	2	3	4	5	6	7	8	9	10	11	
PMIC N/A	PREPARED BY <i>Rick C. Offin</i>		DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444										
STANDARDIZED MILITARY DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE	CHECKED BY <i>Charles E. Besore</i>												
	APPROVED BY <i>[Signature]</i>												
	DRAWING APPROVAL DATE 05 OCTOBER 1990												
AMSC N/A	REVISION LEVEL		SIZE A	CAGE CODE 67268	5962-89803								
			SHEET		.1								

DESC FORM 193
SEP 87


U.S. GOVERNMENT PRINTING OFFICE: 1987 - 748-129/60911
5962-E1518

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

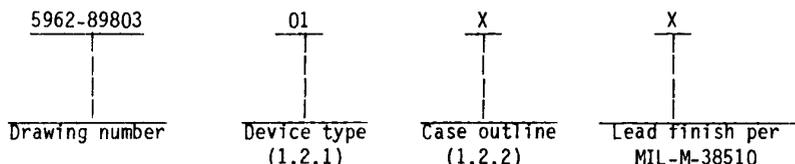

1.2.1 Device type. The device type shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	SL523AC	120 MHZ wideband log amplifier

1.2.2 Case outline. The case outline shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
X	See figure 1 (8-lead, .370" x .185"), can package

1.3 Absolute maximum ratings.

Supply voltage (V+) - - - - -	+9.0 V dc
Maximum instantaneous voltage at video output - - - - -	+12 V dc
Storage temperature range - - - - -	-65°C to +150°C
Lead temperature (soldering, 10 seconds) - - - - -	+300°C
Power dissipation (P _D) - - - - -	500 mW
Thermal resistance, junction-to-case (θ _{JC}) - - - - -	60°C
Thermal resistance, junction-to-ambient (θ _{JA}) - - - - -	70°C
Junction temperature (T _J) - - - - -	+175°C

1.4 Recommended operating conditions.

Supply voltage (V+) - - - - -	+6 V dc
Supply current (I+) - - - - -	+36 mA
Ambient operating temperature range (T _A) - - - - -	-55°C to +125°C

1/ All outputs may be shorted to ground.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89803
	REVISION LEVEL	SHEET 2

2. APPLICABLE DOCUMENTS

2.1 Government specification, standard, and bulletin. Unless otherwise specified, the following specification, standard, and bulletin of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

STANDARD

MILITARY

MIL-BUL-103 - List of Standardized Military Drawings (SMD's).

(Copies of the specification, standard, and bulletin required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.2 Circuit diagram. The circuit diagram shall be as specified on figure 3.

3.2.3 Case outline. The case outline shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89803
		REVISION LEVEL	SHEET 3

TABLE I. Electrical performance characteristics.


Test	Symbol	Conditions 1/ -55°C < T _A < +125°C Unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Supply current	I+		1,2,3	25	36	mA
Small signal voltage gain	A _{VS}	f = 30 MHz	4	22.6	25.4	dB
		f = 60 MHz		22.0	26.0	
		f = 60 MHz	5,6	20.0	28.0	
Upper cut-off frequency	f _{CU}		5,6	100		MHz
Lower cut-off frequency	f _{CL}		5,6		20	
Maximum rectified video output current	I _{RV}	V _{IN} = 0.5 V RMS, f = 60 MHz	4	1.9	2.3	mA
			5,6	1.7	2.5	
Noise figure	N	R _S = 450 ohm, f = 60 MHz, T _A = +25°C	4		5.25	dB

1/ Unless otherwise specified, V+ = +6.0 V dc, source impedance = 10Ω, V_{IN} = 7 mV, load impedance = 8 pF, f = 60 MHz and dc connection between pins 6 and 7.

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89803
	REVISION LEVEL	SHEET 4

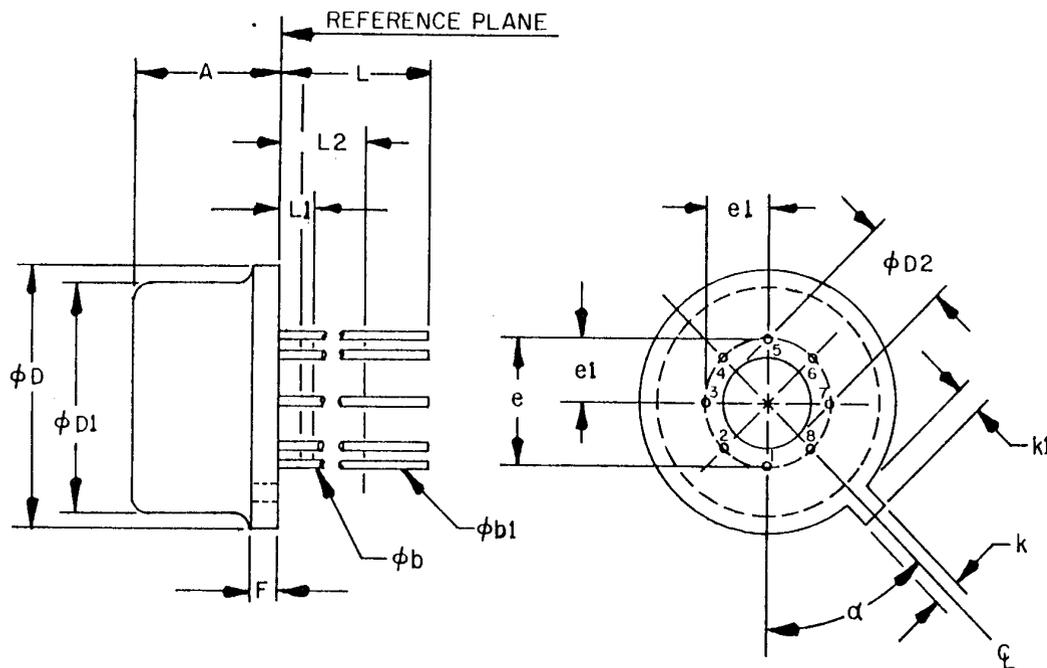

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. All leads: ϕb applies between L1 and L2. $\phi b1$ applies between L2 and .500 (12.70 mm) from the reference plane. Diameter is uncontrolled in L1 and beyond .500 (12.70 mm) from the reference plane.
4. Measured from maximum diameter of the product.
5. Leads having a maximum diameter .019 (0.48 mm) measured in gauging plane .054 (1.37 mm) $+.001$ (0.03 mm) $-.000$ (0.00 mm) below the base plane of the product shall be within .007 (0.18 mm) of their true position relative to a maximum width tab.
6. The product may be measured by direct methods or by gauge.
7. All leads: Increase maximum limit by .003 (0.08 mm) when lead finish A or B is applied.
8. The location, alpha, of the leads N is $\frac{360^\circ}{N}$, N is total number of leads or lead positions.

FIGURE 1. Case outline X.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89803
	REVISION LEVEL	SHEET 5

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.165	.185	4.19	4.70	
∅b	.016	.019	0.41	0.48	3, 5, 7
∅b1	.016	.021	0.41	0.53	3, 5, 7
∅D	.335	.370	8.51	9.40	
∅D1	.305	.335	7.75	8.51	
∅D2	.110	.160	2.79	4.06	
F	---	.040	---	1.02	
k	.027	.034	0.69	0.86	
k1	.027	.045	0.69	1.14	4
L	.500	.750	12.70	19.05	3
L1	---	.050	---	1.27	3
L2	.250	---	6.35	---	3

Case outline	Symbol				Note
	a	e	e1	N	
X	45° BSC	.200 BSC	.100 BSC	8	5


FIGURE 1. Case outline X - Continued.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89803
		REVISION LEVEL	SHEET 6

Device type	01
Case outline	X
Terminal number	Terminal symbol
1	GND
2	V+
3	RF OUTPUT
4	VIDEO OUTPUT
5	INPUT GND
6	RF INPUT
7	BIAS
8	GND

FIGURE 2. Terminal connections.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89803
		REVISION LEVEL	SHEET 7

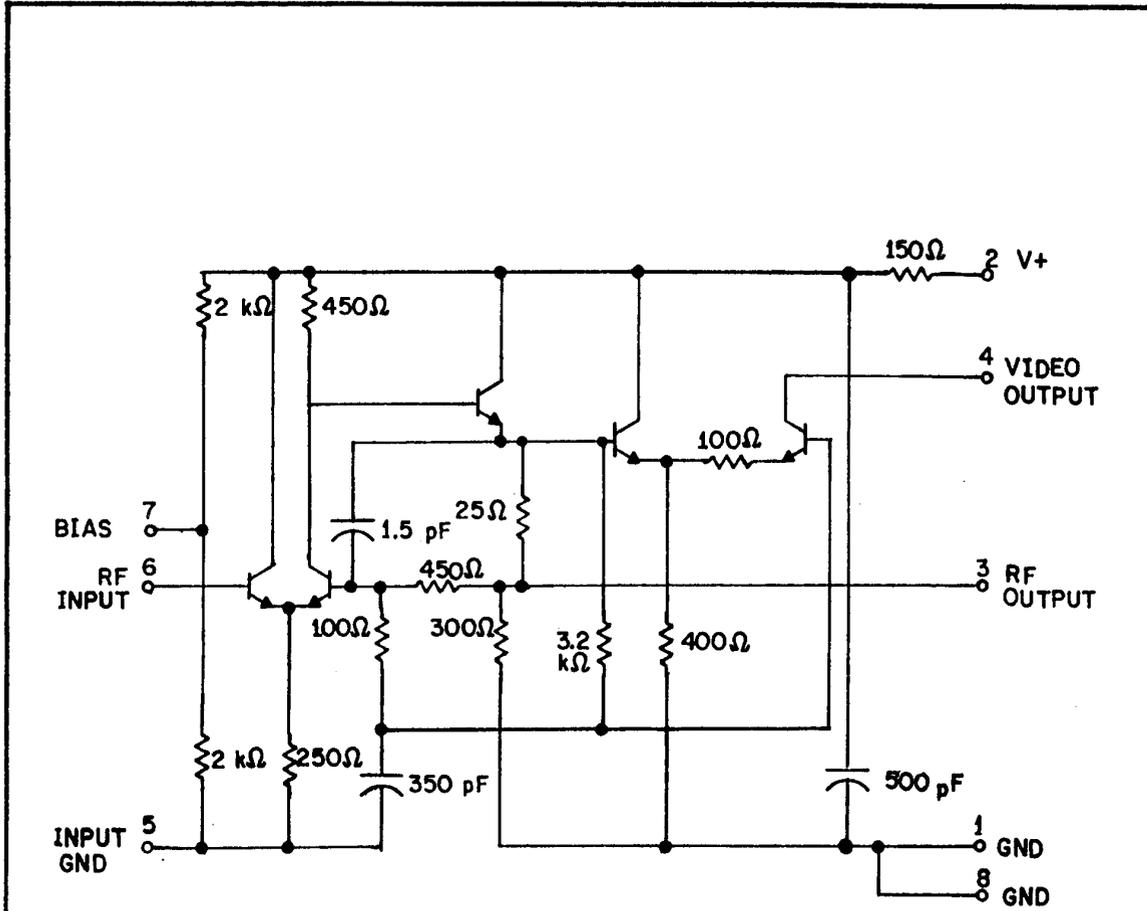

One amplifier

FIGURE 3. Circuit diagram.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89803
	REVISION LEVEL	SHEET 8

3.8 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).

(2) $T_A = +125^{\circ}\text{C}$, minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

a. Tests shall be as specified in table II herein.

b. Subgroups 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

4.3.2 Groups C and D inspections.

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test conditions, method 1005 of MIL-STD-883.

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).

(2) $T_A = +125^{\circ}\text{C}$, minimum.

(3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89803
		REVISION LEVEL	SHEET 9

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table 1)
Interim electrical parameters (method 5004)	1
Final electrical test parameters (method 5004)	1*,2,3,4,5
Group A test requirements (method 5005)	1,2,3,4,5,6
Groups C and D end-point electrical parameters (method 5005)	1

* PDA applies to subgroup 1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD form 1693, Engineering Change Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronic Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DESC-ECS, telephone (513) 296-6022.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89803
		REVISION LEVEL	SHEET 10

6.5 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone (513) 296-5375.

6.6 Approved source of supply. An approved source of supply is listed in MIL-BUL-103. Additional sources will be added to MIL-BUL-103 as they become available. The vendor listed in MIL-BUL-103 has agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-ECS. The approved source of supply listed below is for information purposes only and is current only to the date of the last action of this document.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>
5962-8980301XX	53469	SL523AC/CM

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE number

53469

Vendor name and address

Plessey Semiconductors Corporation
1500 Green Hills Road
Scotts Valley, CA 95066

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89803
		REVISION LEVEL	SHEET 11