

74ALCX16374

Low-Voltage 16-Bit D Flip-Flop with 5V Tolerant Inputs and Outputs

General Description


The ALCX16374 contains sixteen non-inverting D flip-flops with TRI-STATE® outputs and is intended for bus oriented applications. The device is byte controlled. A buffered clock (CP) and Output Enable (CE) are common to each byte and can be shorted together for full 16-bit operation.

The ALCX family of devices excel in bus interface applications where very high speeds and low power consumption are required. ALCX devices are capable of interfacing to the latest high-speed busses while consuming less than 20 μ A of quiescent current. In keeping with National's *CROSSVOLT*™ philosophy, ALCX inputs and outputs are 5V tolerant allowing them to interface to both 3V and 5V components. ALCX inputs and outputs also power up/down in the high impedance state, facilitating power management and live insertion system features. Bus hold on all input, I/O, and control pins removes the need for power-hungry pull-up resistors on TRI-STATE busses. ± 24 mA output drive means ALCX devices can drive all but the heaviest bus and backplane loads quietly due to National's patented Quiet Series™ circuitry.

Features

- 4.8 ns t_{PD} max, 20 μ A I_{CCQ} max
- 5V tolerant inputs and outputs
- Power up/down high impedance inputs and outputs
- Supports live insertion/withdrawal
- Supports power management
- 2.0V–3.6V V_{CC} supply operation
- ± 24 mA output drive
- Bus hold
- Implements patented Quiet Series noise/EMI reduction circuitry
- Functionally compatible with the 74 series 16374
- Latch-up performance exceeds 500 mA
- ESD performance:
 - Human body model > 2000V
 - Machine model > 200V


Logic Symbol

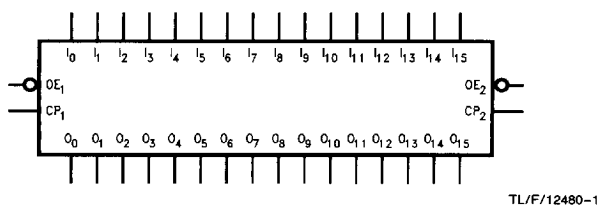

Pin Names	Description
$\overline{OE}_n$	Output Enable Input (Active Low)
CP_n	Clock Pulse Input
I_0 – I_{15}	Inputs
O_0 – O_{15}	Outputs

	SSOP	TSSOP
Order Number	74ALCX16374MEA 74ALCX16374MEAX	74ALCX16374MTD 74ALCX16374MTDX
See NS Package Number	MS48A	MTD48

Connection Diagram

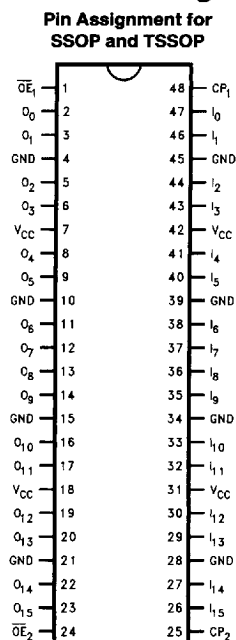

Functional Description

The ALCX16374 consists of sixteen edge-triggered flip-flops with individual D-type inputs and TRI-STATE true outputs. The device is byte controlled with each byte functioning identically, but independent of the other. The control pins can be shorted together to obtain full 16-bit operation. Each byte has a buffered clock and buffered Output Enable common to all flip-flops within that byte. The description which follows applies to each byte. Each flip-flop will store the state of their individual D inputs that meet the setup and hold time requirements on the LOW-to-HIGH Clock (CP_n) transition. With the Output Enable ($\overline{OE}_n$) LOW, the contents of the flip-flops are available at the outputs. When $\overline{OE}_n$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}_n$ input does not affect the state of the flip-flops.

Truth Tables


Inputs			Outputs
CP_1	$\overline{OE}_1$	I_0-I_7	O_0-O_7
	L	H	H
	L	L	L
L	L	X	O_0
X	H	X	Z

Inputs			Outputs
CP_2	$\overline{OE}_2$	I_8-I_{15}	O_8-O_{15}
	L	H	H
	L	L	L
L	L	X	O_0
X	H	X	Z

H = High Voltage Level
 L = Low Voltage Level
 X = Immaterial
 Z = High Impedance
 O_0 = Previous O_0 before HIGH to LOW of CP


Logic Diagrams

Byte 1 (0:7)

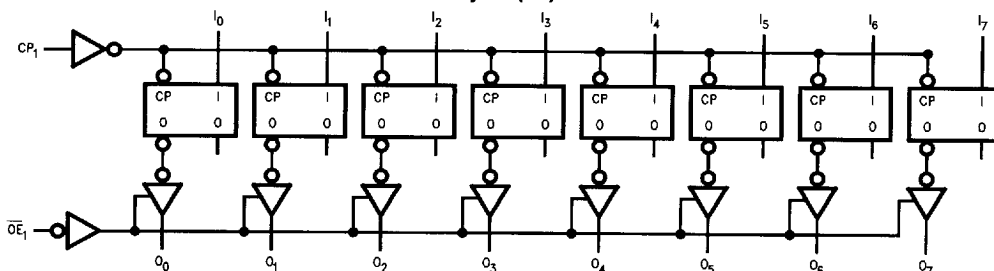

TL/F/12480-3

Byte 2 (8:15)

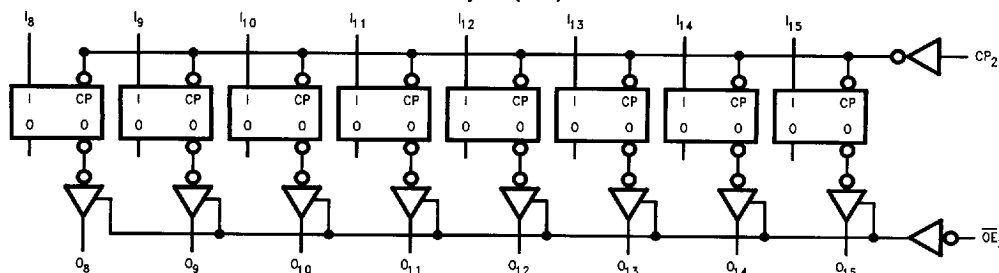

TL/F/12480-4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Symbol	Parameter	Conditions	Value	Units
V_{CC}	Supply Voltage		-0.5 to +7.0	V
V_I	DC Input Voltage		-0.5 to +7.0	V
V_O	DC Output Voltage	Output in TRI-STATE	-0.5 to +7.0	V
		Output in High or Low State (Note 2)	-0.5 to $V_{CC} + 0.5$	V
I_{IK}	DC Input Diode Current	$V_I < GND$	-50	mA
I_{OK}	DC Output Diode Current	$V_O < GND$	-50	mA
		$V_O > V_{CC}$	+50	mA
I_O	DC Output Source/Sink Current		± 50	mA
I_{CC}	DC Supply Current per Supply Pin		± 100	mA
I_{GND}	DC Ground Current per Ground Pin		± 100	mA
T_{STG}	Storage Temperature		-65 to +150	°C

Note 1: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: I_O Absolute Maximum Rating must be observed.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Units
V_{CC}	Supply Voltage	Operating	2.0	3.6
		Data Retention	1.5	3.6
V_I	Input Voltage	0	5.5	V
V_O	Output Voltage	HIGH or LOW State	0	V_{CC}
		TRI-STATE	0	5.5
I_{OH}/I_{OL}	Output Current	$V_{CC} = 3.0V - 3.6V$	± 24	mA
		$V_{CC} = 2.7V$	± 12	mA
T_A	Free-Air Operating Temperature	-40	85	°C
$\Delta t/\Delta V$	Input Edge Rate, $V_{IN} = 0.8V - 2.0V$, $V_{CC} = 3.0V$	0	10	ns/V

DC Electrical Characteristics

Symbol	Parameter	Conditions	V_{CC} (V)	$T_A = -40^\circ C$ to $+85^\circ C$		Units
				Min	Max	
V_{IH}	HIGH Level Input Voltage		2.7-3.6	2.0		V
V_{IL}	LOW Level Input Voltage		2.7-3.6		0.8	V
V_{OH}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$	2.7-3.6	$V_{CC} - 0.2$		V
		$I_{OH} = -12 \text{ mA}$	2.7	2.2		V
		$I_{OH} = -18 \text{ mA}$	3.0	2.4		V
		$I_{OH} = -24 \text{ mA}$	3.0	2.2		V
V_{OL}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$	2.7-3.6		0.2	V
		$I_{OL} = 12 \text{ mA}$	2.7		0.4	V
		$I_{OL} = 16 \text{ mA}$	3.0		0.4	V
		$I_{OL} = 24 \text{ mA}$	3.0		0.55	V
I_I	Input Leakage Current	$V_I = 0V$ or $5.5V$	2.7-3.6		± 5.0	μA

DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	V _{CC} (V)	T _A = -40°C to +85°C		Units
				Min	Max	
I _I (HOLD)	Bushold Leakage Current	V _I = 0.8V	3.0	-75		μA
		V _I = 2.0V	3.0	75		
I _I (OD)	Bushold Overdrive Current		3.0	± 500		μA
I _{OZ}	TRI-STATE Output Leakage	0 ≤ V _O ≤ 5.5V V _I = V _{IH} or V _{IL}	2.7-3.6		± 5.0	μA
I _{OFF}	Power-Off Leakage Current	0 ≤ V _I , V _O ≤ 5.5V	0		10	μA
I _{CC}	Quiescent Supply Current	V _I = V _{CC} or GND	2.7-3.6		20	μA
		3.6V ≤ V _I , V _O ≤ 5.5V	2.7-3.6		± 20	μA
ΔI _{CC}	Increase in I _{CC} per Input	V _{IH} = V _{CC} - 0.6V	2.7-3.6		500	μA

Dynamic Switching Characteristics

Symbol	Parameter	Conditions	V _{CC} (V)	T _A = 25°C	Units
				Typical	
V _{OLP}	Quiet Output Dynamic Peak V _{OL}	C _L = 50 pF, V _{IH} = 3.3V, V _{IL} = 0V	3.3	0.8	V
V _{OLV}	Quiet Output Dynamic Valley V _{OL}	C _L = 50 pF, V _{IH} = 3.3V, V _{IL} = 0V	3.3	0.8	V

Capacitance

Symbol	Parameter	Conditions	Typical	Units
C _{IN}	Input Capacitance	V _{CC} = Open, V _I = 0V or V _{CC}	7	pF
C _O	Output Capacitance	V _{CC} = 3.3V, V _I = 0V or V _{CC}	8	pF
C _{PD}	Power Dissipation Capacitance	V _{CC} = 3.3V, V _I = 0V or V _{CC} , F = 10 MHz	20	pF