

CATALOGUE NUMBER	LEAD FREE VERSION
7832C0425X01	7832C0425X01LF

Tous droits strictement réservés. Reproduction ou communication sans l'autorisation écrite de la société est formellement interdite.

All rights strictly reserved. Reproduction or communication without written authority from the proprietor.

FCI

A


B

C


D

E

F

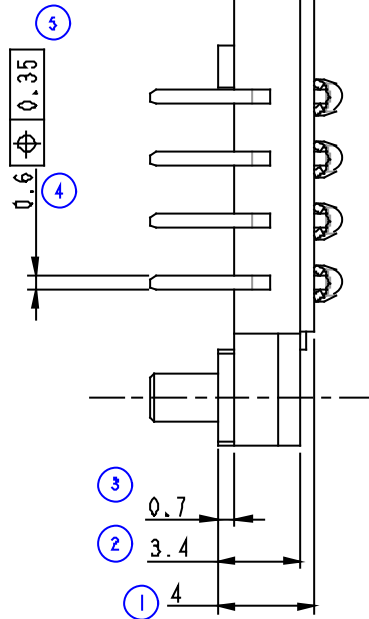

IMPLANTATION C.I PCB FOOTPRINT

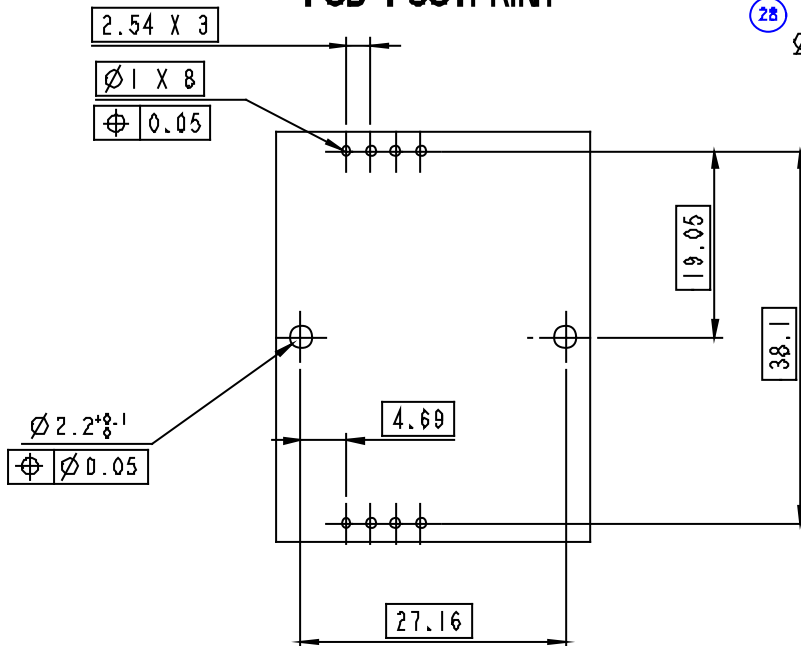

6

31.16-0.2


7

Ø 2.4

A

B

SECTION B-B

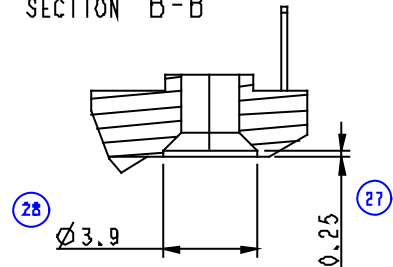

SECTION

LEAD FREE VERSION:

"This product meets European Union Directives regulations as described in GS-22-008"

The housing will withstand exposure to 250°C in a wave solder application with a 1.6mm pitch.

Use protective adhesive tape (Kapton or equivalent) on the areas which are directly exposed in classical leaded wave soldering.

Sn Matte plating on solder tail for Lead Free version.