

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
DTV6-2RN2

DTV6-2RN2

M

DRAWING
NUMBER

13

ISSUE

REVISIONS

A	CO18435	MBF	9 OCT 63
B	CO23251	MBF	25 SEPT 67
C	CO23858	MBF	20 FEB 68
D	55191-0	KJS	1 MAR 84
E	CO55989	CJH	5 NOV 84
F	CO54958	TSK	26 FEB 85
G	CO72661	DAW	16 SEP 92
H	CO77179-D	JJO	12 MAR 94
J	CO81513B	JAK	12 MAR 97
K	CO018962	VKR	14 FEB 06

FORMTEK

DRAWN

REPLACES

RELEASE NO.

CHECK

BP


14 FEB 06

B, NOV 83

PAW

9 OCT 63

CHECK

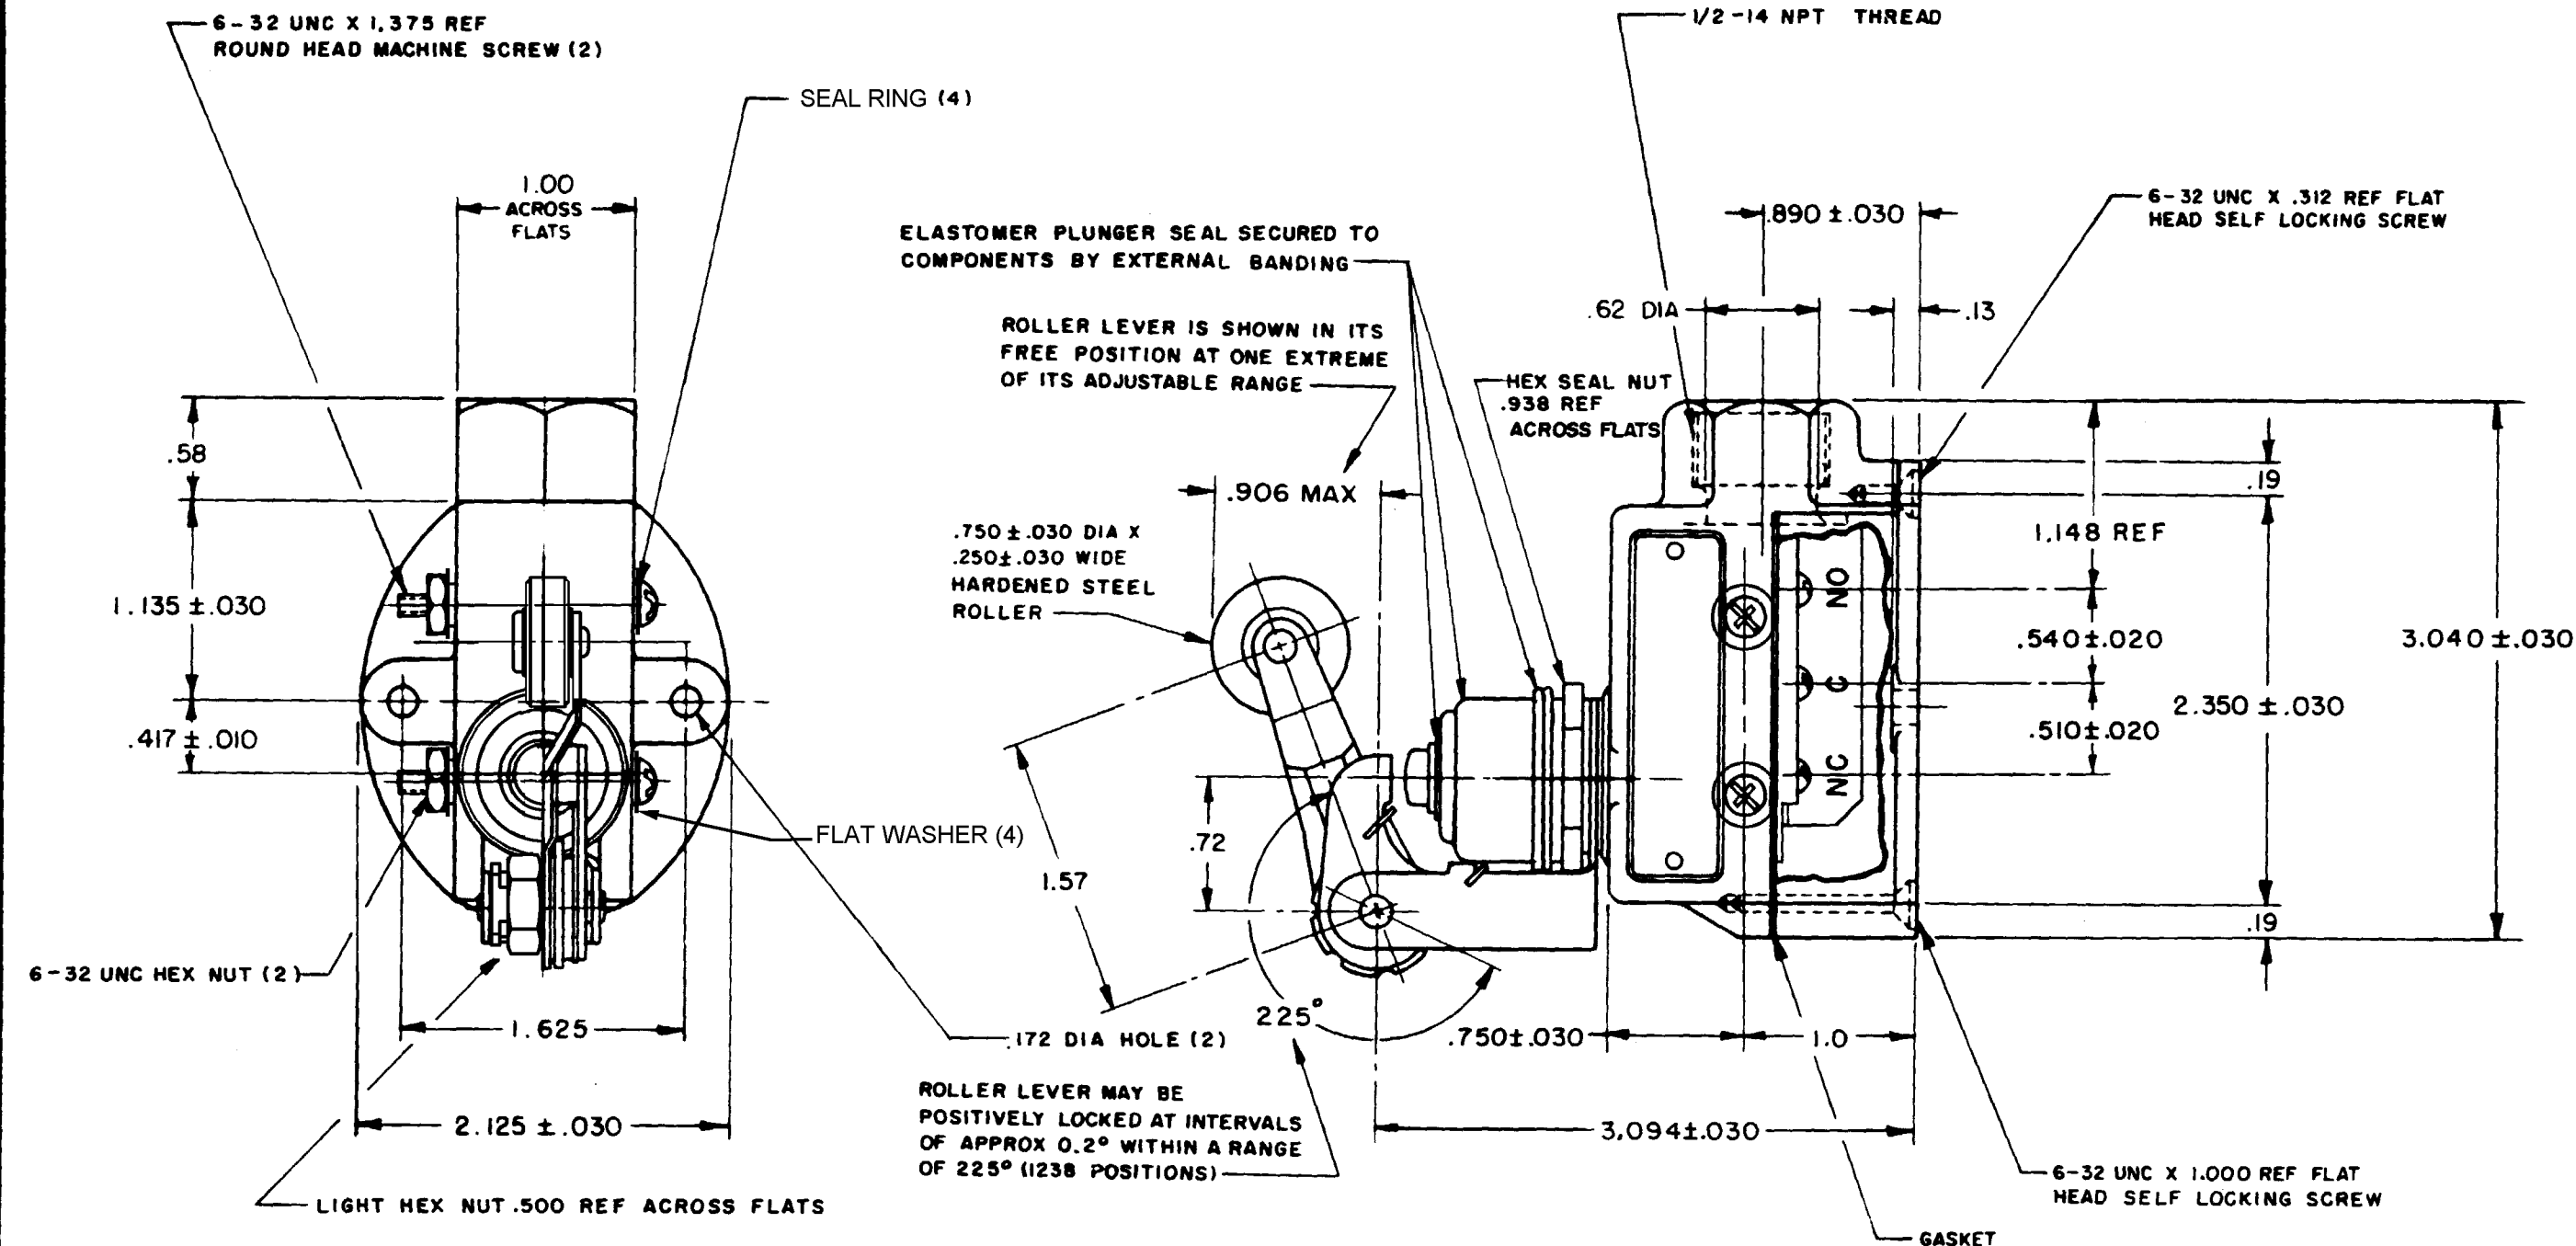

NOTES

- 1 - 4-40UNC X.125 REF TERMINAL SCREW AND LOCKWASHER (6)
- 2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 3 - SEAL RATING : NEMA 1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
CHARACTERISTICS	ELECTRICAL DATA	
OPERATING FORCE — — — — 10-30 OZ	CONTACT ARRANGEMENT D P D T	SCALE FULL
RELEASE FORCE — — — — 6 OZ MIN	-L59- 10 A-125 OR 250 VAC 0.3 A-125 VDC ; 0.15 A-250 VDC 	DO NOT SCALE PRINT
PRETRAVEL — — — — .266 MAX		UNLESS OTHERWISE SPECIFIED
DIFFERENTIAL TRAVEL — — — .165 MAX		DIMENSIONS ARE IN INCHES
OVERTRAVEL — — — — .219 MIN		TOLERANCES ARE:
SWITCH - BASIC REPLACEMENT- DT-2R3-A7	CE 1.5A, 240Vac	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.018 THREE PLACE (.000) ±.008 ANGLES 2
		WEIGHT