

**SPECIFICATIONS**

**Material:** APM RUBRGLASTM (transparent silicone rubber), polymer type, ASTM D1418



**Temperature Range:** -80°F to +400°F

**Operational Life:** 50,000 actuations (minimum).

**Resistant to:** Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils

**Agency Recognition:** Rock-R-SealsTM are UL-listed to UL Std. 50, types 1, 2, 4R, 5, 12, 12k, 13, and meet CSA standard

**Shelf Life:** Excess of 25 years.

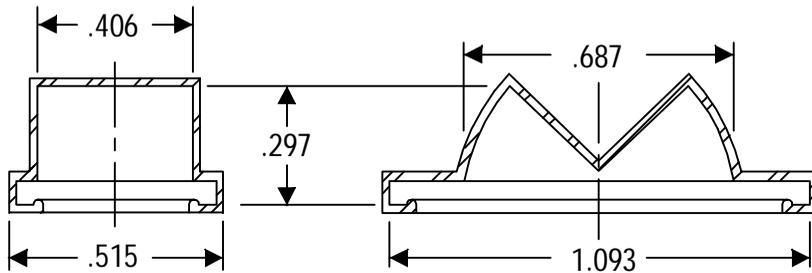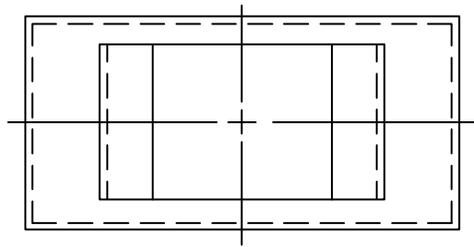

B	CHANGED DWG # FROM C1113/63 to 1113/63, REVISED TITLE FOR ACCURACY		07.22.08
A	CAD COMPUTER GENERATED		10.23.02
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE:	ROCKER SWITCH	ENG. S. GOK 07.22.08
		BOOT 1 POLE	DWN. M.M. 02.21.86
			CHKD. J. CELLA 07.22.08
MAT'L: RUBRGLAS®	APM-HEXSEAL CORPORATION	SCALE	1113/63
FINISH: TRANSPARENT		2 : 1	
		DWG. NO.	

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.