

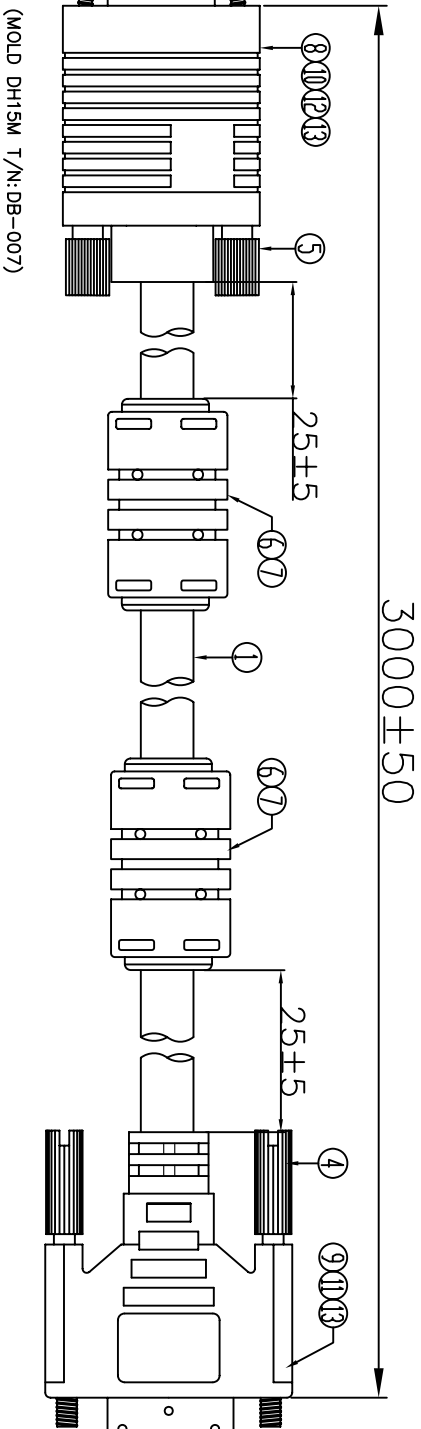



UNIT:mm



(MOLD DH15M T/N:DB-007)

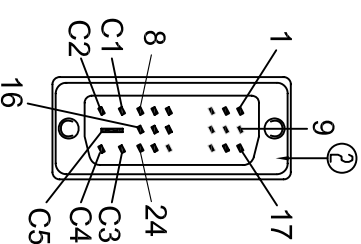

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:10M ohm min.
- 4.Hi-Pot:300V DC/10ms
- 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

VEGA TECHNOLOGIES INDUSTRIAL (AUSTRIA) CO.

DRAWN BY	ZHONGHS	DRAWING NO.	VG/LJQ-094-016
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	751-20010-00300
DECIDE BY		DATE	2012-02-14
VERSIONS/EDITION	A/0	PROJECTION	

NO.	NAME	Q'TY	SPECIFICATION
⑬	TUBE	6	HEAT SHRINK TUBE BLACK OD3.0mm L=8mm.
		2	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.
⑫	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W25mm L=60mm.
⑪	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑩	IN JACKET	10g	INNER MOLD:CLEAR LDPE
⑨	IN JACKET	4g	CLEAR PE(NM-15)
	OUT JACKET	15g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑧	OUT JACKET	30g	OUTER MOLD:45P PVC BLUE(PT:661C/BE-54#).
⑦	OUT JACKET	20g	BLACK PVC 45P (CH-002)
⑥	FERRITE	2	Core:RH17.5*10.6*28.5mm
⑤	SCREW	2	SCREW:HD40.5 #4-40UNC PLATED NI MOLD:BLUE(PT:661C/BE-54#).ABS
④	SCREW	2	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
③	CONN	1	HD15P MALE INSULATION BLUE:SHELL NICKEL,PIN GOLD FLASH.
②	CONN	1	DV(18+5) MALE INSULATION BLACK:SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [30AWG*3Coax+28AWG*7C]+AL/MY+D.W+BD+JACKET:BLACK 表面 OD:7.0±0.15mm L=3000+40/-0mm.

SPECIFICATION

4

3

2

1