



How 3M™ Filters Trap More Dirt

As illustrated below, the finer the fiber in a filter weave, the greater the ability to trap dirt and other particles, thus decreasing blow-by. The photomicrographs show that the 3M filter has a more effective weave than that of a conventional filter bag. This increases the ability to trap dirt and virtually eliminates blow-by.

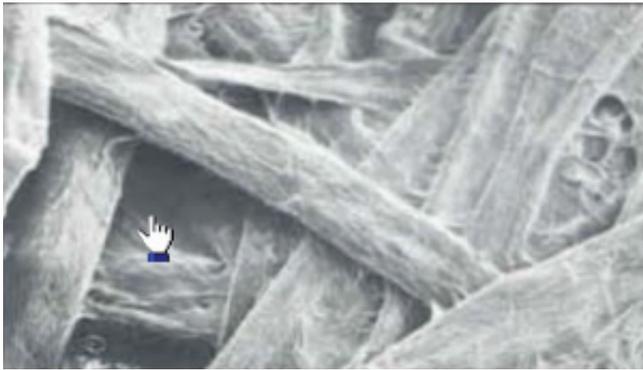

Photomicrograph of the fiber weave of a conventional filter bag (500x)

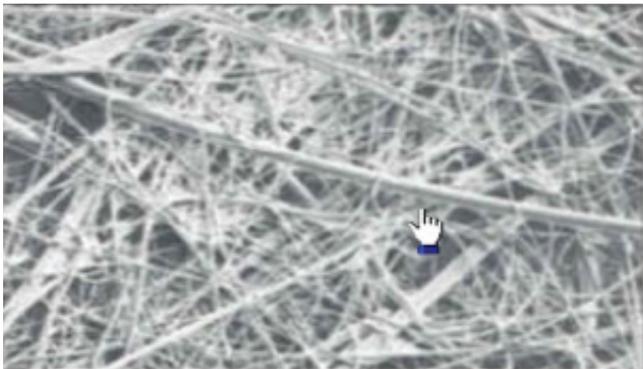

Photomicrograph of the fiber weave of a 3M filter (500x)


3M™ Filter, Type 1 SV-SPF1 Fine Particle Filters

A thinner, more concentrated weave (HEPA media) for trapping extremely fine particles. Typical applications: color laser printers, color copiers and highly sensitive equipment.

3M™ Filter, Type 2 SV-MPF2 High Performance Filters

Specially designed for trapping unwanted toner from copiers and laser printers. Also ideal for cleaning keyboards, fans and other household dust collections.

Typical Particle Sizes

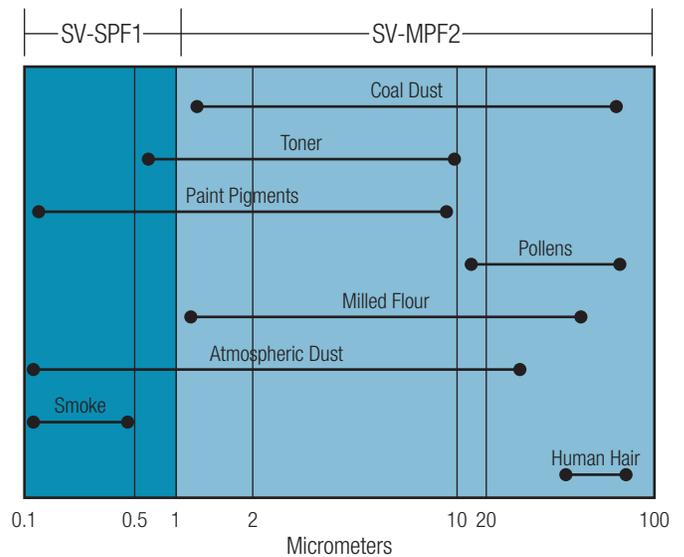


Efficiency

Date :	August 20, 2008
Filter ID :	Type 2 Filter
Test Type :	Fractional Efficiency
Test Aerosol :	KCl, Neutralized
Flow rate(cfm)	40 cfm (Type 2)
Dp (" H2O)	3.079
Size Range (mm)	Fractional Efficiency (%)
0.3-0.5	47.0
0.5-0.7	64.9
0.7-1.0	76.9
1.0-2.0	90.7
2.0-3.0	96.7
3.0-5.0	99.4
>5.0	100.0


Date :	August 20, 2008
Filter ID :	Type 1 Filter
Test Type :	Fractional Efficiency
Test Aerosol :	KCl, Neutralized
Flow rate(cfm)	40 cfm (Type 1)
Dp (" H2O)	3.157
Size Range (mm)	Fractional Efficiency (%)
0.3-0.5	99.980
0.5-0.7	99.991
0.7-1.0	99.999
1.0-2.0	100.000
2.0-3.0	100.000
3.0-5.0	100.000
>5.0	100.000

Date :	August 20, 2008
Filter ID :	Type 1a Filter (HEPA)
Test Type :	Fractional Efficiency
Test Aerosol :	KCl, Neutralized
Flow rate(cfm)	40 cfm (Type 1a)
Dp (" H2O)	3.157
Size Range (mm)	Fractional Efficiency (%)
0.3-0.5	99.988
0.5-0.7	99.995
0.7-1.0	100.000
1.0-2.0	100.000
2.0-3.0	100.000
3.0-5.0	100.000
>5.0	100.000

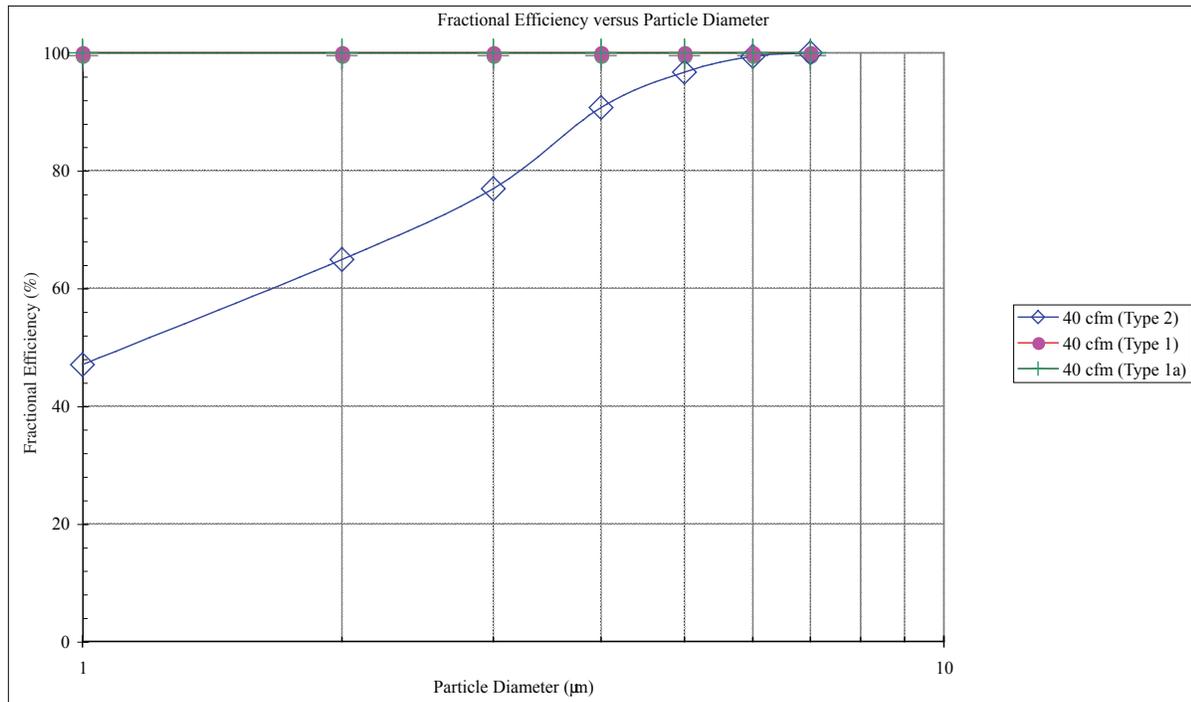

Typical Loading

"Weight Gain (gram) Alumina Fines"	"Pressure Drop (mm H2O)"
0.0	655.7
454.0	358.0
908.0	168.0
1362.0	70.6
1816.0	5.1
1828.3	2.2

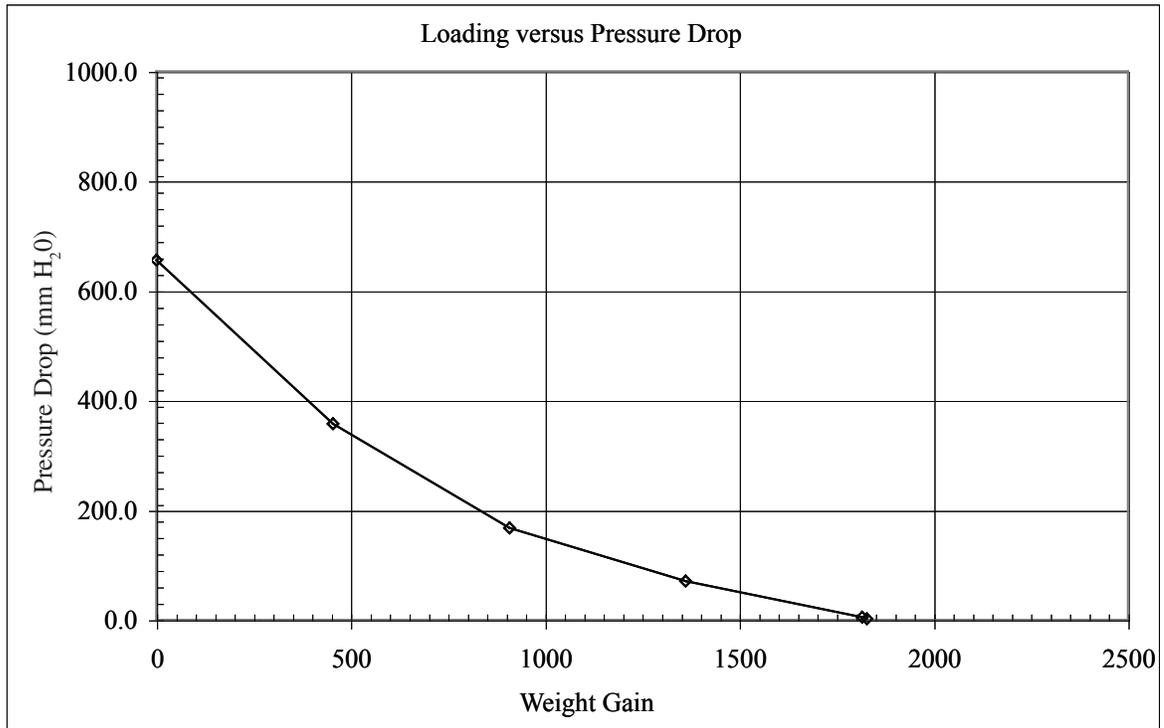

3M is a trademark of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Electronic Solutions Division

6801 River Place Blvd.
 Austin, TX 78726-9000
 800-225-5373
www.3M.com/interconnects

Please Recycle. Printed in USA.
 © 3M 2008. All Rights Reserved.
 SPEC-124404 rev. A