


size	ports		
	2	3	4
A	13.00	26.00	39.00
B	32.28 ^{+0.25} ₋₀	45.28 ^{+0.27} ₋₀	58.28 ^{+0.35} ₋₀

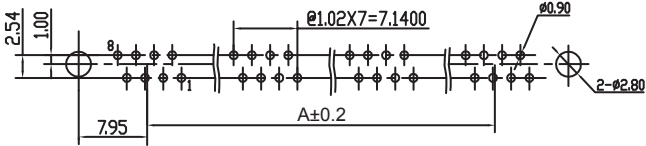

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
METAL PIN: BRASS NI PLATED
QUALITY CLASS: 500 MATING CYLCES


ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +85°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 1.5A
WORKING VOLTAGE: 120V AC
INSULATION RESISTANCE: >500 MΩ
WITHSTANDING VOLTAGE: 1000 VAC/min
CONTACT RESISTANCE: 20 mΩ max

STANDARD
CERTIFIED: E324776

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
TRAY

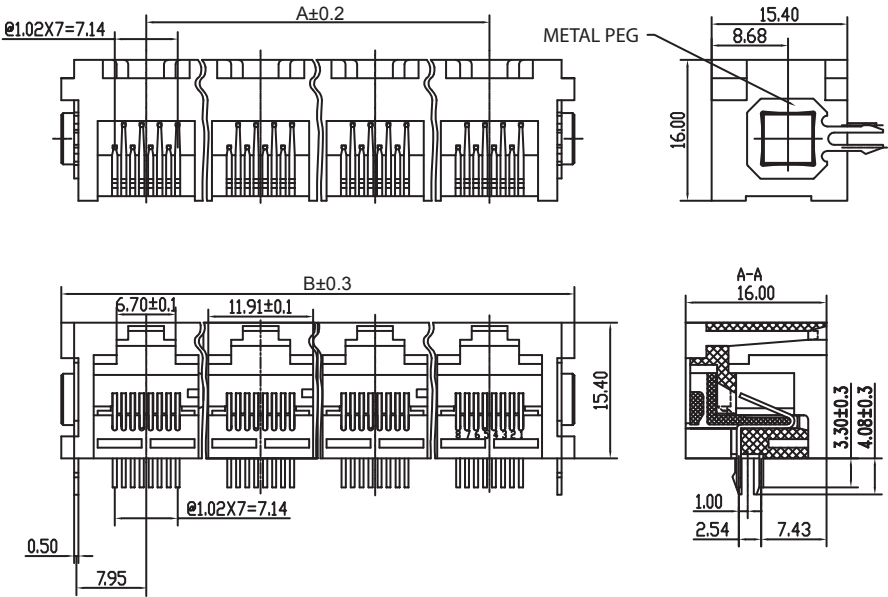

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$_ 0.3 .XX = $\pm$_ 0.20	 WÜRTH ELEKTRONIK		
G								
F								
E								
D				APPROVAL: RJ	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC 8P8C ASSEMBLY MODULAR JACK TAB UP	SIZE A4	
C					SCALE:			
B					SHEET: 1/3			WERI PART NO: 615 0xx 149 521
A	23-JUL-14	PDF	AS		DRAW: AS			
REV	DATE	FILE	BY					

1

2

3

4


5

A


B

C

D

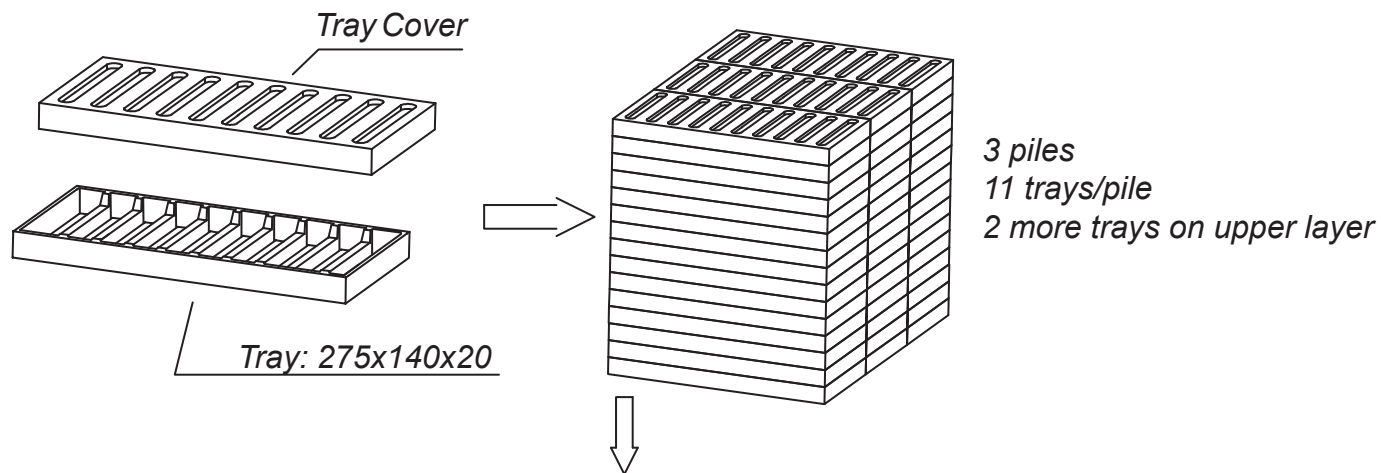

Carton size: 460x310x310
Waterproof bag size: 450x350x570

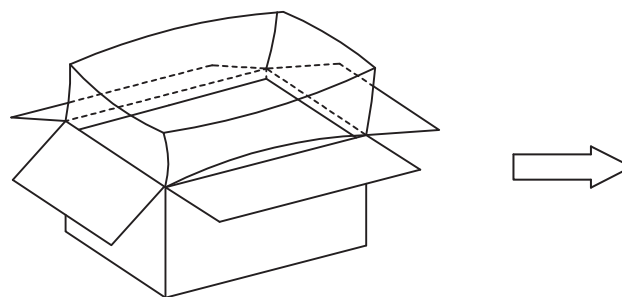

Ports	2	3	4
Pcs/Tray	40	20	20
Pcs/Carton	1400	700	700

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 2/3

DRAW: AS

DESCRIPTION: HORIZONTAL PLASTIC 6P6C
ASSEMBLY MODULAR JACK TAB UP

WERI PART NO: 615 0xx 149 521

SIZE

A4

REV	DATE	FILE	BY
A	23-JUL-14	PDF	AS

1				2				3				4				5				
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.																	A			
																	B			
																	C			
																	D			
RoHS Compliant																				
G				PROJECTION: 				GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15												
F																				
E																				
D																				
C				APPROVAL: JC				UNIT: MM				DESCRIPTION: DISCLAIMER				SIZE				
B								SCALE:				WERI PART NO: DISCLAIMER				A4				
A	10-SEP-14	PDF	QL					SHEET: 3/3												
REV	DATE	FILE	BY					DRAW: QL												