

Specification Sheet

CK-120

ESKA

Plastic Optical Fiber

High-Performance Plastic Optical Fiber

E s k a™

MITSUBISHI RAYON CO.,LTD.

ESKA OPTICAL FIBER DIVISION

6-41 Konan 1-Chome,Minato-ku,Tokyo 108-8506,JAPAN

Phone :+81-3-5495-3060

Facsimile :+81-3-5495-3212


1. Scope
- The specification covers basic requirements for the structure and optical performances of CK-120.
2. Structure

Table 1

CK-120

Item		Specification			
		Unit	Min.	Typ.	Max.
Optical Fiber	Core Material	—	Polymethyl-Methacrylate Resin		
	Cladding Material	—	Fluorinated Polymer		
	Core Refractive Index	—	1.49		
	Refractive Index Profile	—	Step Index		
	Numerical Aperture	—	0.5		
	Core Diameter	μm	2765	2945	3125
	Cladding Diameter	μm	2820	3000	3180
Approximate Weight		g/m	8.6		

Sectional View

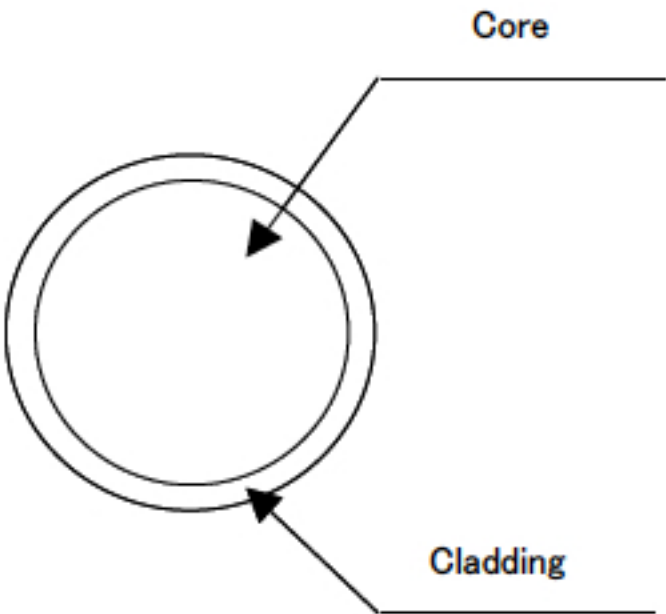

3. Performances

Table 2

			CK-120			
Item		Acceptance Criterion and/or [Test Condition]	Specification			
			Unit	Min.	Typ.	Max.
Maximum Rating	Storage Temperature	No Deterioration in Optical Properties	°C	− 55	—	+70
	Operation Temperature	No Deterioration in Optical Properties* [in a Dry Atmosphere]	°C	− 55	—	+70
		No Deterioration in Optical Properties** [95%RH]	°C	—	—	+60
Optical Properties	Transmission Loss	[650nm Collimated Light] [Standard condition] [10m-1m cutback]	dB/km	—	—	200
Mechanical Characteristics	Minimum Bend Radius	Loss Increment $\leq 1.0\text{dB}$ [A Quarter Bend]	mm	100	—	—
	Tensile Strength	[Tensile Force at Yield Point] [JIS C 6861]	N	550	—	—

All tests are carried out under temperature of 25°C unless otherwise specified.

* Attenuation change shall be within +/- 10% after 1,000 hours.

** Attenuation change shall be within +/- 10% after 1,000 hours, except that due to absorbed water.