

5

4

3

2

1

D

C


B

A




Description: BNC Bulkhead Adapter Jack to Jack
 Part No: CPAD556M
 Application: Adapter
 Crimp Tool: N/A
 Impedance: 50 Ohms
 Frequency Range: 0-4 GHz
 Material: Body: Brass Nickel plated
 Contact: BerylliumCopper Gold plated
 Insulator: Teflon
 Lock Washer: Iron Nickel plated
 HEX Nut: Brass Nickel plated
 RoHS Compliance: Yes
 Technical Detail: Refer to Emerson Document P/N 27-0000

| | |
|---------------|---|
| DRAWING NO. | |
| CPAD556M-CUST | |
| REVISIONS | |
| 01 | OFFICIAL RELEASE |
| | 02-20-09 I W B T |
| 02 | RELEASE FOR SUPPLIER ALTER |
| | 07-27-11 Y G Y M L |
| 03 | MATERIAL OF LOCK WASHER WAS BRASS Φ15.5 WAS Φ15.10 |
| | 12-31-11 Y G Y M L ECO-11-0270 |

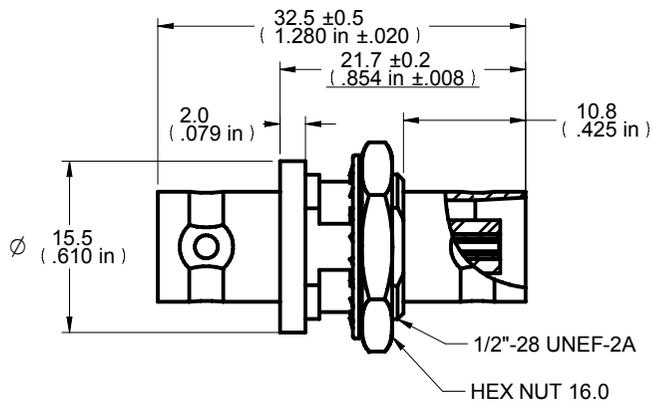

DIM OUTLINE

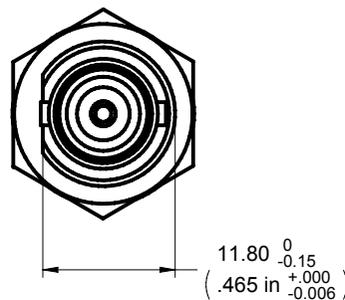

CUSTOMER COPY

| | | | |
|--------------------------------------|--------|-------------|----------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | DRAWN BY | DATE |
| DECIMALS | mm | YUGE HU | 07-27-11 |
| X | ± 0.5 | CHECKED BY | DATE |
| X.X | ± 0.3 | YUGE HU | 07-27-11 |
| X.XX | ± 0.1 | APPROVED BY | DATE |
| ANGLES | ± 0.5° | YUGE HU | 07-27-11 |
| | | U/M | mm |

| | | |
|-----------------------------------|------------------------|------|
| | Connectivity Solutions | |
| | TITLE | |
| BNC BULKHEAD ADAPTER JACK TO JACK | | |
| SHEET | DRAWING NO. | SIZE |
| 1 OF 1 | CPAD556M-CUST | A |

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

5

4

3

2

1

D

C

B

A