

# RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



RJ45 sleeve housing, IP67, for pin insert VS-08-ST-H11-RJ45 and VS-08-ST-H21-RJ45, with push-pull interlocking for panel mounting frames, for cable cross section 5.0 mm ... 8.5 mm, color: gray



## Key commercial data

Packing unit	1
Minimum order quantity	5
Catalog page	Page 287 (PC-2011)
GTIN	 4 017918 952877
Custom tariff number	85472000
Country of origin	GERMANY

## Technical data

### Mechanical characteristics

Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 8.5 mm
Cable exit	Straight
Color	gray
Ambient temperature (operation)	-40 °C ... 80 °C

### Material data

Inflammability class according to UL 94	V0
Housing material	PA
Material, O-ring	FPM
Cable seal material	NBR
Degree of protection	IP67

## Classifications

### eclass

eCl@ss 4.0	27140816
------------	----------

# RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

## Classifications

### eclass

eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 7.0	27440309

### etim

ETIM 2.0	EC000764
ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC001121

### unspsc

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Accessories

### Accessories

#### Protective covers

Protective covers - VS-SCRJ-PC - 1653757



IP67 protective cover, for covering the male inserts in the sleeve housings IP67, VS-SCRJ-..., VS-04-..., VS-06-... and VS-08-...

RJ45 male insert - VS-08-ST-H11-RJ45 - 1652716



RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 27 ... 26, with strain relief

## RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

### Accessories

RJ45 male insert - VS-08-ST-H21-RJ45 - 1652729




RJ45 male insert, CAT6, 8-pos., shielded, IDC displacement connection, for litz wire AWG 25 ... 24 and solid wires AWG 24, with strain relief

---

### Drawings

Dimensioned drawing

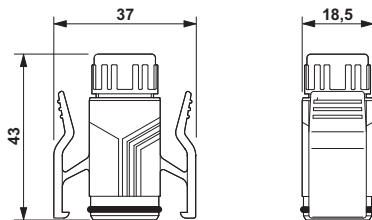

RJ45 sleeve housing IP67

---

© Phoenix Contact 2012 - all rights reserved  
<http://www.phoenixcontact.com>