

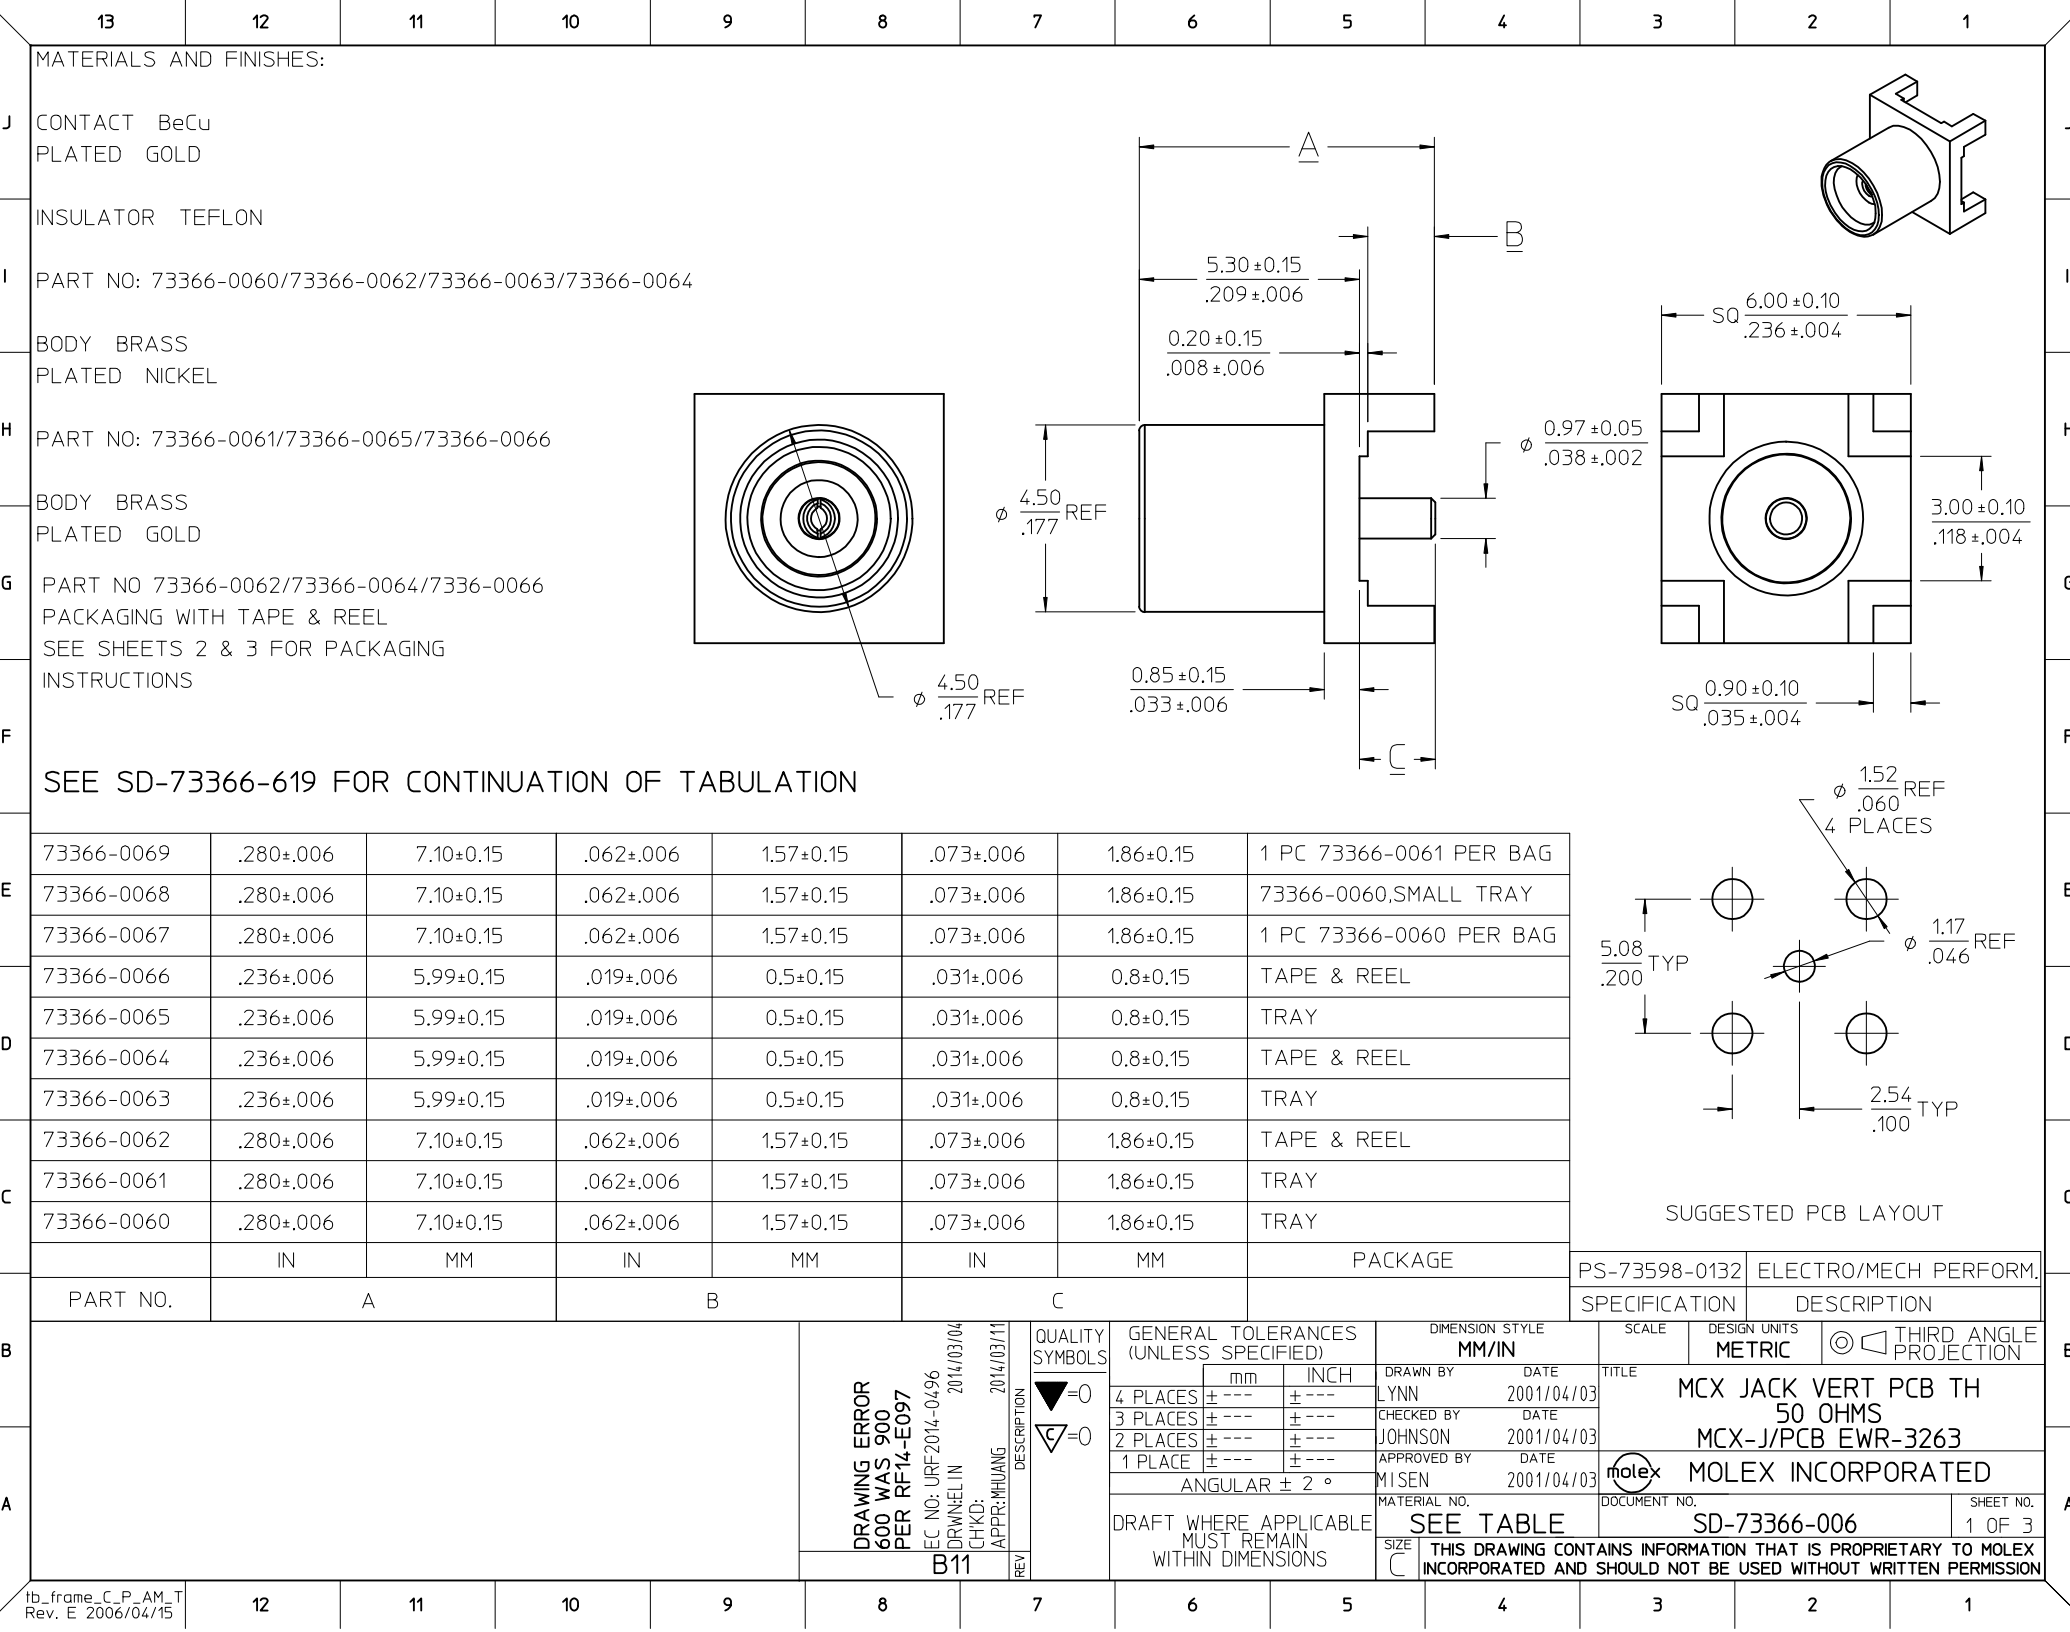


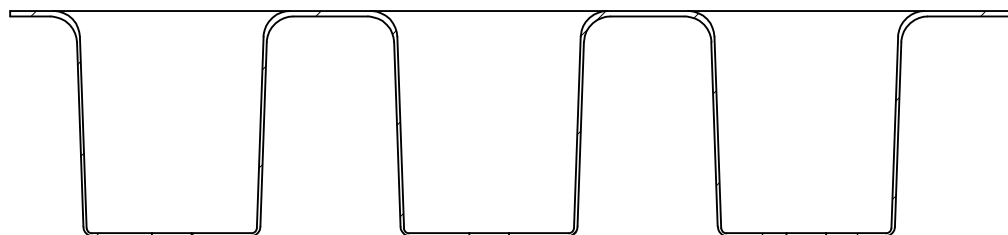

NOTE:
1. 10 PITCHES CUMULATIVE TOLERANCE $\pm 0.20(.008)$

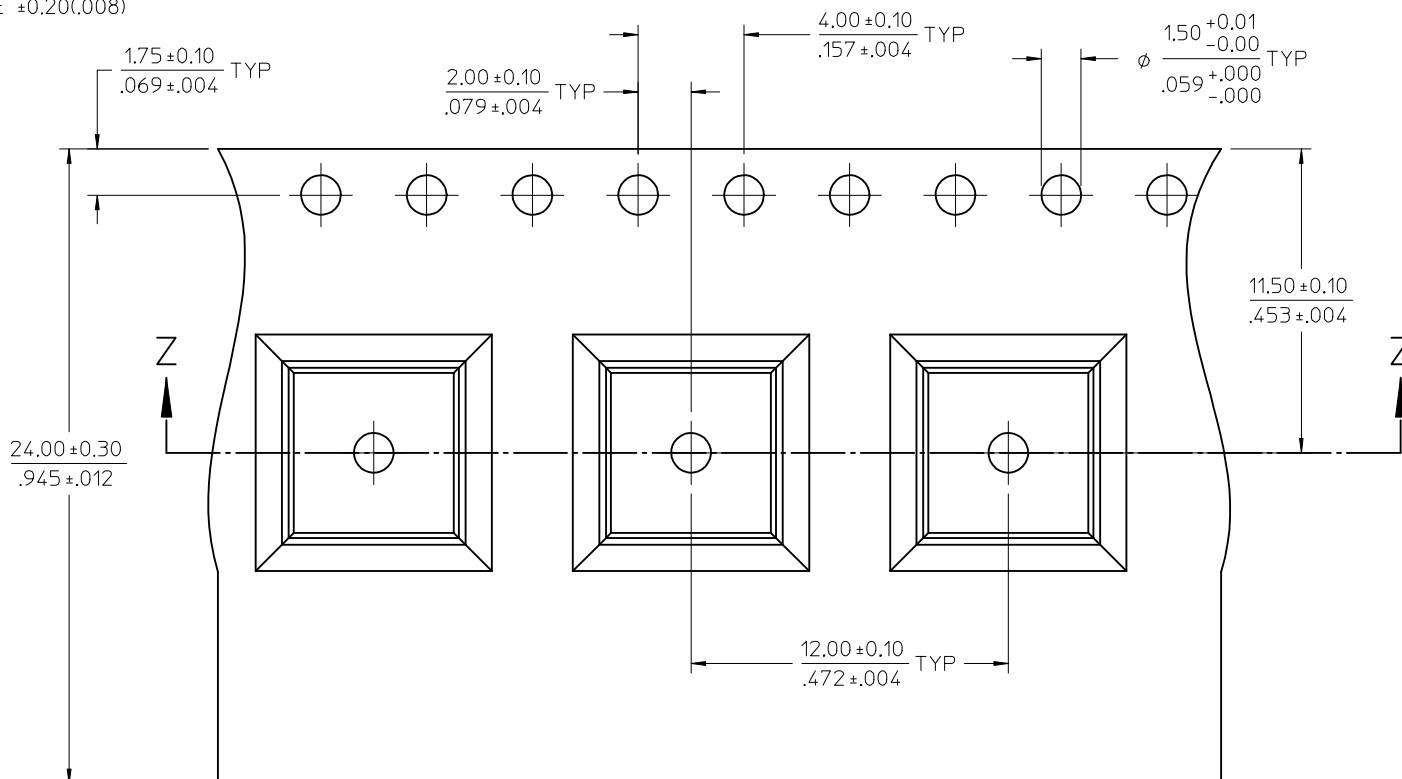

SECTION Z-Z

CHG: SEE SHEET 1
EC NO: URF2014-0496
2014/03/04
CHKD: DRWNELIN
APPR: MHIANG
2014/03/11

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	$\pm$ ---	$\pm$ ---
3 PLACES	$\pm$ ---	$\pm$ ---
2 PLACES	$\pm$ ---	$\pm$ ---
1 PLACE	$\pm$ ---	$\pm$ ---

ANGULAR $\pm 2^\circ$

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
LYNN	2001/04/03

CHECKED BY	DATE
JOHNSON	2001/04/03

APPROVED BY	DATE
MISEN	2001/04/03

MATERIAL NO.

SEE SHEET 1

SIZE

SCALE
METRIC

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

TITLE
MCX JACK VERT PCB TH
50 OHMS
MCX-J/PCB EWR-3263


MOLEX INCORPORATED

DOCUMENT NO.
SD-73366-006

SHEET NO.
2 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


24.43
.962 MIN

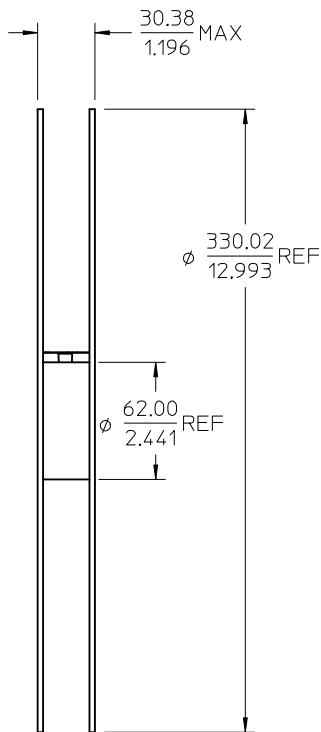

LABEL:

- ORDER NO.
- QUANTITY
- PART NUMBER
- LOT NO.

12.75
.502 REF

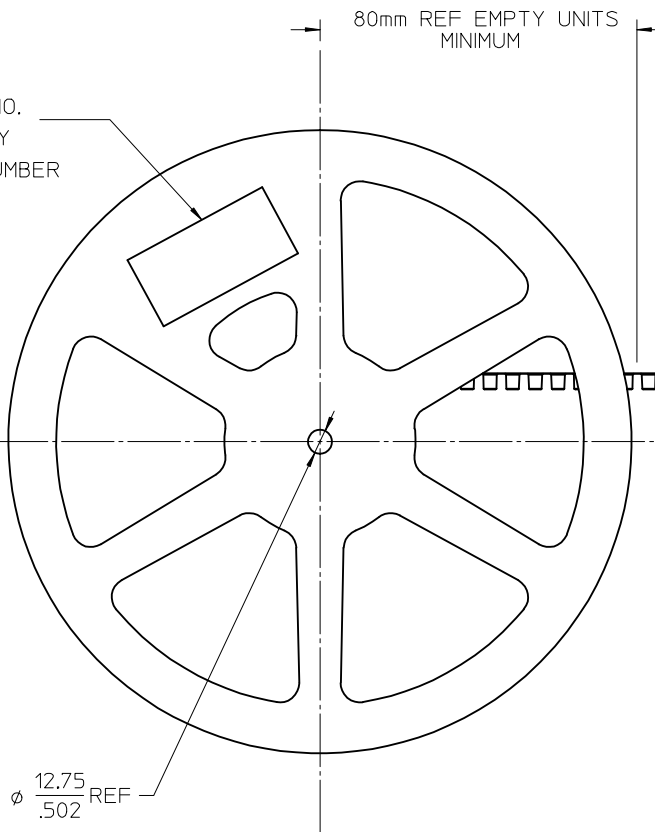

HANDLING DIRECTION

NOTES:

- 1.MATERIAL :PS BLACK-THICKNESS:0.40±0.05mm
- 2.PACKING LENGTH PER: 22" REEL: 35 METERS
- 3.COMPONENT LOAD PER: 13" REEL: 600PCS

CHG: SEE SHEET 1

EC NO: URF2014-0496

DRWN:LIN 2014/03/04

CHKD: 2014/03/11

APPR:MHUANG

REV

DESCRIPTION

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .---
2 PLACES	± .---	± .---
1 PLACE	± .---	± .---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY

LYNN

CHECKED BY

JOHNSON

APPROVED BY

MISEN

DATE

2001/04/03

DATE

2001/04/03

DATE

2001/04/03

SCALE

1:1

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

MCX JACK VERT PCB TH
50 OHMS
MCX-J/PCB EWR-3263

MOLEX INCORPORATED

SEE SHEET 1

SD-73366-006

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX




INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MATERIALS AND FINISHES

BODY: BRASS
PLATED GOLD

CONTACT: BERYLLIUM COPPER
PLATED GOLD

INSULATOR: TEFLON

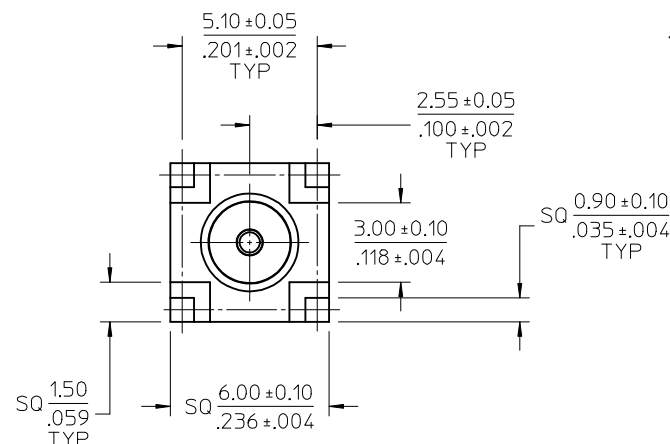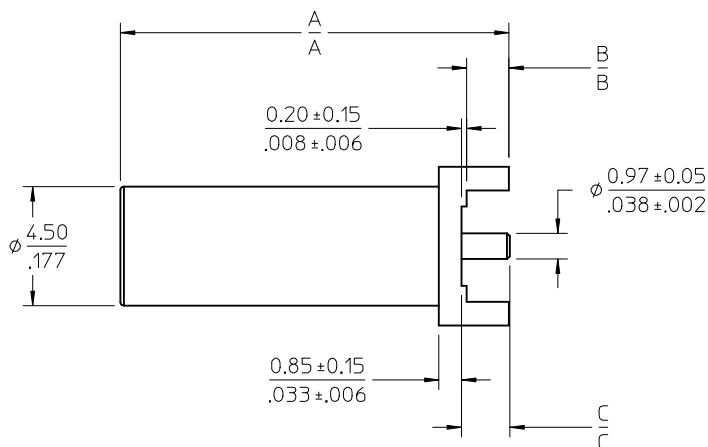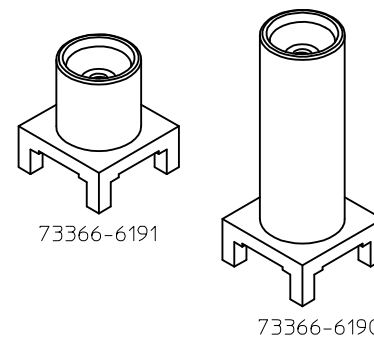

SEE SD-73366-006 FOR TAPE & REEL DRAWING,
PCB LAYOUT, AND PRODUCT SPECIFICATION

73366-6191	.280±.006	7.10±0.15	.062±.006	1.57±0.15	.073±.006	1.86±0.15	TAPE & REEL WITH KAPTON TAPE
73366-6190	.579±.006	14.70±0.15	.062±.006	1.57±0.15	.073±.006	1.86±0.15	TRAY
PART NO.	IN	MM	IN	MM	IN	MM	PACKAGING
A		B		C			

CHG: NEW RELEASE EC NO: URF2014-0534 DRWN: JLEE02 2014/03/21 CHKD: SSS 2014/03/21 APPR: WSP INK 2014/04/10				QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
						mm	INCH	DRAWN BY	DATE	TITLE MCX JACK VERTICAL PCB TH 50 OHMS MCX-J/PCB, EWR-4225		
					4 PLACES	± ---	± ---	AZR	2009/10/14			
					3 PLACES	± ---	± ---	CHECKED BY	DATE			
		2 PLACES	± ---	± ---	SSS	2009/10/14						
		1 PLACE	± ---	± ---	APPROVED BY	DATE						
		ANGULAR ± 2 °			WSP INK	2014/04/10						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		SEE TABLE		DOCUMENT NO.		SHEET NO.	
							SD-73366-619		1 OF 1			
A		REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									