
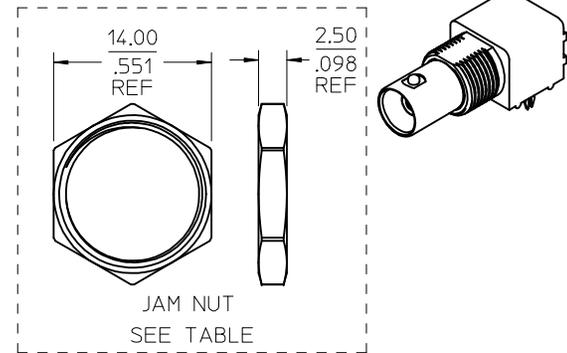


MATERIALS AND FINISHES

- BODY ZINC ALLOY
PLATED NICKEL
- CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD
- INSULATOR POLYPROPYLENE
- HOUSING P.B.T.
COLOR BLACK
- SOLDER TAIL BRASS
PLATED TIN
- BOARD LOCK CLIP
PHOSPHOR BRONZE
PLATED TIN

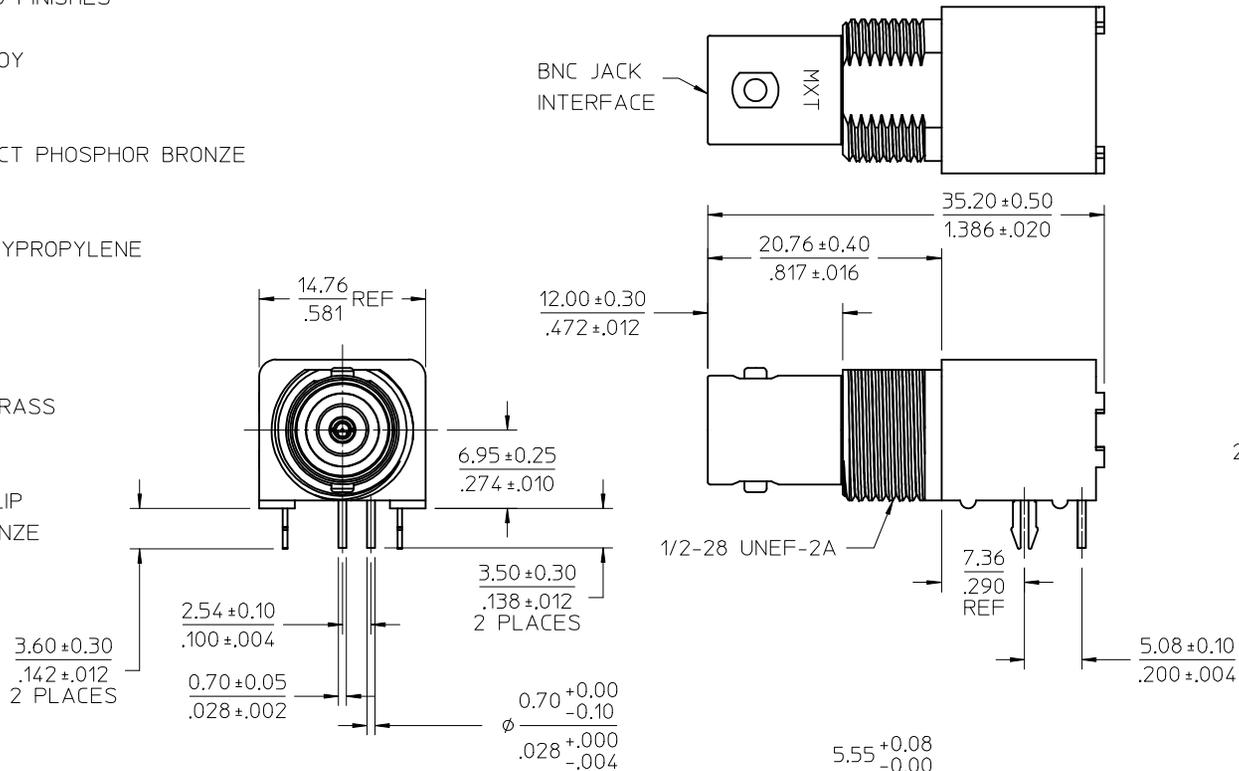

73171-3061	TRAY PACK, JAM NUT BULK	INCLUDED
73171-3060	73100-0167, ONE PER BAG	NOT INCLUDED
73100-0167	TRAY PACK	NOT INCLUDED
PART NO.	PACKAGING	JAM NUT
		89611-0450

PS-89675-1030	ELECTRO/MECH PERFORM
SPECIFICATION	DESCRIPTION

RECOMMENDED MOUNTING HOLE
 RECOMMENDED MOUNTING
 TORQUE: 0.56 N-m (5.0 IN-LBS)
 PANEL THICKNESS: 5.5 (.217) MAX
 RECOMMENDED PCB LAYOUT

CHG: UPDATED VIEWS OF CORRECTED SUB-ASSEMBLY.	EC NO: URF2016-0072	DRWIN:ROBERTSON 2015/08/27	CHKD:SSS 2015/08/27	APPR:ROBERTSON 2015/08/31	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
							mm	INCH	MM/IN	METRIC	⊘		
							4 PLACES ±	±	DRAWN BY	DATE	TITLE		
							3 PLACES ±	±	IRIS	1995/02/14	BNC JACK R/A PCB TH COMMERCIAL 50 OHM BNC-J/RA/PCB molex		
							2 PLACES ±	±	CHECKED BY	DATE			
							1 PLACE ±	±	SSS	2015/08/27			
							0 PLACE ±	±	APPROVED BY	DATE			
							ANGULAR ±		MATERIAL NO.	DOCUMENT NO.			
							DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	SD-73100-0167			SHEET NO.
									THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1 OF 1