

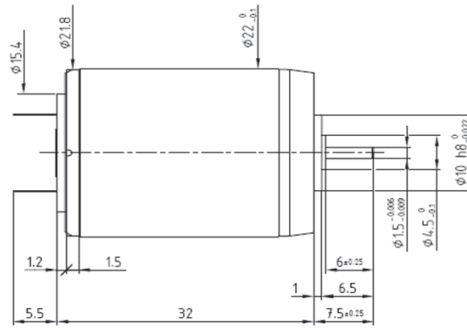


22N78 Athlonix™

Precious metal commutation

Ø22mm

15.7 mNm



Dimensions in mm

22N78 **** .1001

Electrical Data	****	319P	313P	311P	216E	215E	208E	
1 Nominal Voltage	V	6	9	12	18	24	48	Volt
2 No-Load Speed	n ₀	8,660	6,860	7,280	8,250	9,075	6,350	rpm
3 No-Load Current	I ₀	28.0	10.0	11.0	6.0	5.0	0.0	mA
4 Terminal Resistance	R	0.6	2.5	3.9	7.7	11.0	107.0	Ω
5 Output Power	P _{2max.}	13.0	12.0	12.0	11.3	11.5	10.0	W
6 Stall Torque	mNm	66 (9.35)	45 (6.38)	48 (6.8)	49 (6.94)	55 (7.79)	32 (4.54)	mNm (oz-in)
7 Efficiency	η _{max.}	90	90	88	90	91	91	%
8 Max Continuous Speed	n _{e max.}	10,000	10,000	10,000	10,000	10,000	10,000	rpm
9 Max Continuous Torque	M _{e max.}	15.7 (2.06)	14.5 (2.06)	14.8 (2.1)	13.8 (1.96)	14.5 (2.06)	12.9 (1.83)	mNm (oz-in)
10 Max Continuous Current	I _{e max.}	2.40	1.18	0.95	0.67	0.58	0.18	A
11 Back-EMF Constant	k _E	0.69	1.31	1.64	2.18	2.64	7.54	mV/rpm
12 Torque Constant	k _M	6.60	12.50	15.70	20.80	25.20	72.00	mNm/A
13 Motor Regulation	R/k ²	13.8	16.0	15.8	17.80	17.32	20.64	10 ³ /Nms
14 Friction Torque	T _F	0.07 (0.01)	0.25 (0.04)	0.11 (0.02)	0.12 (0.02)	0.12 (0.02)	0.07 (0.01)	mNm (oz-in)
15 Rotor Inductance	L	0.04	0.16	0.25	0.50	0.60	7.00	mH
16 Mechanical Time Constant	t _m	6.7	7.0	6.6	8.4	7.8	6.9	ms
17 Rotor Inertia	J	4.90	4.39	4.20	4.74	4.50	3.32	g.cm ²
General Data								
18 Thermal Resistance (rotor/body)	R _{th1} / R _{th2}	6/22						°C/W
19 Thermal Time Constant (rotor/stator)	t _{w1} /t _{w2}	9/550						S
20 Operating Temperature Range:	motor	-30 °C to 85 °C (-22 °F to 185 °F)						°C (°F)
	rotor	100 °C (212 °F)						°C (°F)
21 Shaft Load Max.:		With sleeve bearings						
(5mm from bearing)	-radial	3.0 (10.8)						N (oz)
	-axial	150 (539.5)						N (oz)
22 Shaft Play:	-radial	<0.03 (0.0012)						mm (inch)
	-axial	0.15 (0.0059)						mm (inch)
23 Weight	g	53 (1.87)						g (oz)

Execution Table

Gearbox	Single Shaft	MR2	E9
R22	1001	1008	1005
M22	1001	1008	1005
K24	1001	1008	1005
K27	1001	1008	1005

