
SEMICONDUCTOR GENERAL CATALOG

東芝半導体製品総覧表2016年7月版

General-Purpose Linear ICs 汎用リニアIC

Power Supply ICs / 電源用IC

Motor Drivers / モータドライバ

LED Drivers / LEDドライバ








Intelligent Power Devices (IPDs) / インテリジェントパワーデバイス (IPD)

Operational Amplifier ICs (Op Amp ICs) & Comparator ICs / オペアンプ/ コンパレータ

Transistor Arrays / トランジスタアレイ

Power Supply ICs / 電源用IC


Load Switch ICs / ロードスイッチIC

Package (mm)	Part Number	Output Current (A)	Operating Voltage Range (V)	RON Max (Ta = −40 to 85°C)	Functions								
					Inrush Current Reduction Circuit (Slew Rate Control)	Output Discharge	Thermal Shutdown	Overcurrent Protection	Reverse Current Blocking	Control Pin Connection			
 (mm)	TCK101G	1.0	1.1 to 5.5	70 mΩ@VIN = 5.0 V, 500 mA 100 mΩ@VIN = 1.8 V, 500 mA 180 mΩ@VIN = 1.2 V, 500 mA	Yes	Yes	Yes			Active High (pull-down)			
	TCK102G	1.0			Yes		Yes						
	TCK104G	0.5		83 mΩ@VIN = 5.0 V, 400 mA 101 mΩ@VIN = 1.8 V, 400 mA 171 mΩ@VIN = 1.2 V, 400 mA	Yes	Yes	Yes	500 mA					
	TCK105G	0.8		83 mΩ@VIN = 5.0 V, 700 mA 101 mΩ@VIN = 1.8 V, 700 mA 183 mΩ@VIN = 1.2 V, 700 mA	Yes	Yes	Yes	800 mA					
 (mm)	TCK106G	1.0	1.1 to 5.5	73 mΩ@VIN = 5.0 V, 500 mA 123 mΩ@VIN = 1.8 V, 500 mA 225 mΩ@VIN = 1.2 V, 200 mA	Yes								
	TCK107G	1.0			Yes	Yes							
	TCK108G	1.0			Yes	Yes					Active Low (open)		
 (mm)	TCK106AG	* 1.0	1.1 to 5.5	55 mΩ@VIN = 5.0 V, 0.5 A 105 mΩ@VIN = 1.8 V, 0.5 A 220 mΩ@VIN = 1.2 V, 0.2 A	Yes					Active High (pull-down)			
	TCK107AG	* 1.0			Yes	Yes					Active High (pull-down)		
	TCK108AG	* 1.0			Yes	Yes					Active Low (open)		
 (mm)	TCK106AF	* 1.0	1.1 to 5.5	90 mΩ@VIN = 5.5 V, 0.5 A 155 mΩ@VIN = 1.8 V, 0.5 A 270 mΩ@VIN = 1.2 V, 0.5 A	Yes					Active High (pull-down)			
	TCK107AF	* 1.0			Yes	Yes					Active Low (open)		
	TCK108AF	* 1.0			Yes	Yes							
 (mm)	TCK111G	* 3.0	1.1 to 5.5	15 mΩ@VIN = 1.1 V, 1.5 A	Yes		Yes		True Reverse Current Blocking	Active High (pull-down)			
	TCK112G	* 3.0			Yes	Yes	Yes						
 (mm)	TCK206G	* 2.0	0.75 to 3.6	28 mΩ@VIN = 0.75 V, 1.5 A	Yes				Yes	Active High (pull-down)			
	TCK207G	* 2.0			Yes	Yes			Yes				
	TCK208G	* 2.0			Yes	Yes			Yes	Active Low (open)			
 (mm)	TCK22946G	* 0.40	1.1 to 5.5	85 mΩ@VIN = 5.0 V, 150 mA 95 mΩ@VIN = 3.3 V, 150 mA 140 mΩ@VIN = 1.8 V, 150 mA	50 μs	Yes	Yes	400 mA	True Reverse Current Blocking	Active high (pull-down)			
	TCK22951G	* 0.74			50 μs	Yes	Yes	740 mA					
	TCK2065G	* 1.11	1.4 to 5.5		50 μs	Yes	Yes	1110 mA					
	TCK1024G	* 1.54			50 μs	Yes	Yes	1540 mA					
	TCK22891G	* 0.40			50 μs	Yes	Yes	400 mA					
	TCK22892G	* 0.74			50 μs	Yes	Yes	740 mA					
	TCK22893G	* 1.11			50 μs	Yes	Yes	1110 mA					
	TCK22894G	* 1.54			50 μs	Yes	Yes	1540 mA					
	TCK22921G	* 2.0	1.1 to 5.5	43 mΩ@VIN = 5.0 V, 500 mA 53 mΩ@VIN = 3.3 V, 500 mA 83 mΩ@VIN = 1.8 V, 500 mA 185 mΩ@VIN = 1.2 V, 500 mA	4.5 μs	Yes			Yes	Active high (pull-down)			
	TCK22922G	* 2.0			666 μs	Yes			Yes				
	TCK22923G	* 2.0			1364 μs	Yes			Yes				
	TCK22925G	* 2.0			3380 μs	Yes			Yes				
	TCK22971G	* 2.0			4.5 μs				Yes				
	TCK22972G	* 2.0			666 μs				Yes				
	TCK22973G	* 2.0			1364 μs				Yes				
	TCK22974G	* 2.0			3380 μs				Yes				
	TCK22975G	* 2.0			666 μs				Yes		Active Low (open)		
	TCK22910G	* 2.0			1.1 to 5.5		1400 μs		Yes			True Reverse Current Blocking	Active Low (open)
	TCK22911G	* 2.0					1400 μs	Yes	Yes				Active high (pull-down)
	TCK22912G	* 2.0					1400 μs		Yes				
	TCK22913G	* 2.0					1400 μs	Yes	Yes				

*: New product / 新製品


Power Multiplexer ICs / パワーマルチプレクサ IC

(Switch Type: Dual Input-Single Output)

Package (mm)	Part Number	Output Current (A)	Operating Voltage Range (V)	R _{ON} Max (Ta = -40°C to 85°C)	Over voltage lock out (typ.)(V)	Under voltage lock out (typ.)(V)	Thermal Shutdown	Reverse Current Blocking	Auto power source select mode	Flag Operation
 WCSP16C(1919)	TCK321G *	2.0	2.3 to 36	170 mΩ@V _{IN} = 4.5 V, 1 A	12	2.9	Yes	Yes	Yes	VINA Monitored
	TCK322G *	2.0			15	2.9	Yes	Yes	Yes	VINA Monitored
	TCK323G *	2.0			15	2.9	Yes	Yes	Yes	VINB Monitored

*: New product / 新製品

(Switch Type: Single Input-Single Output)

Package (mm)	Part Number	Output Current (A)	Operating Voltage Range (V)	R _{ON} Max (Ta = -40°C to 85°C)	Over voltage lock out (typ.)(V)	Under voltage lock out (typ.)(V)	Thermal Shutdown	Reverse Current Blocking	Switch Control function	Chip Enable function
 WCSP9	TCK301G *	3.0	2.3 to 28	140 mΩ@V _{IN} = 4.5 V, 1 A	6.6	2.9	Yes	Yes	Active High (pull-up)	Active Low (pull-down)
	TCK302G *	3.0			10.5	2.9	Yes	Yes	Active High (pull-up)	Active Low (pull-down)
	TCK303G *	3.0			15.5	2.9	Yes	Yes	Active High (pull-up)	Active Low (pull-down)
	TCK304G *	3.0			6.6	2.9	Yes	Yes	Active Low (pull-down)	Active High (pull-down)
	TCK305G *	3.0			10.5	2.9	Yes	Yes	Active Low (pull-down)	Active Low (pull-down)

*: New product / 新製品

Small Surface-Mount Low Dropout (LDO) Regulators / 小型面実装ロードロップアウト (LDO) レギュレータ

Low Dropout (LDO) Regulators are so small they can be locally assigned to individual circuit blocks, making them suitable for applications requiring low dropout.
These devices incorporate an ON/OFF control function, which facilitates power management.

回路ブロックに分散配置ができるロードロップアウトレギュレータICです。
ON/OFFスイッチ機能が付いていますので、パワーマネジメントが可能です。

- < Features >
- ・ Small package

・ Overcurrent protection

・ Low saturation voltage

・ Low noise

・ Low current consumption (CMOS Type)

・ ON/OFF control function

・ Low-dropout voltage

・ High ripple rejection

・ Overtemperature protection

・ Fast load transient response

・ Capable of using a ceramic capacitor

・ Auto discharge, CE pin with a pull-down resistor
- < 特長、付加機能 >
- ・ 小型パッケージ

・ 過電流保護回路内蔵

・ 低飽和電圧

・ コントロール端子プルダウン接続

・ 低ノイズ

・ 低消費電流 (CMOSタイプ)

・ ON/OFFコントロール機能内蔵

・ 低ドロップアウト電圧

・ 高リップルリジェクション

・ 過熱保護回路内蔵





・ 高速負荷過渡応答

・ セラミックコンデンサ使用可能

・ オートディスチャージ機能内蔵

(Single Output CMOS Type) / (CMOS, シングル出力)

□Iout (Max) = 500 mA







Output Voltage Vout (V) (Typ.)	Part Number	
	DFN5B  (mm)	SMV  (mm)
Auto Discharge	Yes	Yes
0.55	TCR5AM055 *	TCR5AF055 *
0.6	TCR5AM06 *	TCR5AF06 *
0.65	TCR5AM065 *	TCR5AF065 *
0.7	TCR5AM07 *	TCR5AF07 *
0.75	TCR5AM075 *	TCR5AF075 *
0.8	TCR5AM08 *	TCR5AF08 *
0.85	TCR5AM085 *	TCR5AF085 *
0.9	TCR5AM09 *	TCR5AF09 *
0.95	TCR5AM095 *	TCR5AF095 *
1.0	TCR5AM10 *	TCR5AF10 *
1.0	TCR5AM10A *	—
1.05	TCR5AM105 *	TCR5AF105 *
1.1	TCR5AM11 *	TCR5AF11 *
1.1	TCR5AM11A *	—
1.15	TCR5AM115 *	TCR5AF115 *
1.15	TCR5AM115A *	—
1.2	TCR5AM12 *	TCR5AF12 *
1.2	TCR5AM12A *	—
1.25	TCR5AM125 *	TCR5AF125 *
1.3	TCR5AM13 *	TCR5AF13 *
1.4	TCR5AM14 *	TCR5AF14 *
1.5	TCR5AM15 *	TCR5AF15 *
1.6	TCR5AM16 *	TCR5AF16 *
1.7	TCR5AM17 *	TCR5AF17 *
1.8	TCR5AM18 *	TCR5AF18 *
1.9	TCR5AM19 *	TCR5AF19 *
2.0	TCR5AM20 *	TCR5AF20 *
2.1	TCR5AM21 *	TCR5AF21 *
2.2	TCR5AM22 *	TCR5AF22 *
2.3	TCR5AM23 *	TCR5AF23 *
2.4	TCR5AM24 *	TCR5AF24 *
2.5	TCR5AM25 *	TCR5AF25 *
2.6	TCR5AM26 *	TCR5AF26 *
2.7	TCR5AM27 *	TCR5AF27 *
2.8	TCR5AM28 *	TCR5AF28 *
2.85	TCR5AM285 *	TCR5AF285 *
2.9	TCR5AM29 *	TCR5AF29 *
2.95	TCR5AM295 *	TCR5AF295 *
3.0	TCR5AM30 *	TCR5AF30 *
3.1	TCR5AM31 *	TCR5AF31 *
3.2	TCR5AM32 *	TCR5AF32 *
3.3	TCR5AM33 *	TCR5AF33 *
3.4	TCR5AM34 *	TCR5AF34 *
3.5	TCR5AM35 *	TCR5AF35 *
3.6	TCR5AM36 *	TCR5AF36 *
Pin Configuration (Top View)	 VIN CONTROL 4 5* 3 1 2 VOUT VBAT *Center electrode is GND	 1:VIN 2:GND 3:CONTROL 4:VBAT 5:VOUT

・ Please ask your local retailer about the devices with other output voltages.

・ その他の電圧ランクは営業窓口とご相談ください。

*: New product / 新製品

□I_{OUT} (Max) = 300 mA

Output Voltage V _{out} (V) (Typ.)	Part Number		
	SMV  (mm)	DFN4  (mm)	WCSP4E  (mm)
Auto Discharge	Yes	Yes	Yes
1.0	TCR3DF10	TCR3DM10	TCR3DG10 *
1.05	TCR3DF105	TCR3DM105	—
1.1	TCR3DF11	TCR3DM11	TCR3DG11 *
1.2	TCR3DF12	TCR3DM12	TCR3DG12 *
1.25	TCR3DF125	—	—
1.3	TCR3DF13	TCR3DM13	TCR3DG13 *
1.35	—	TCR3DM135	TCR3DG135 *
1.5	TCR3DF15	TCR3DM15	—
1.7	TCR3DF17	—	—
1.8	TCR3DF18	TCR3DM18	TCR3DG18 *
1.85	TCR3DF185	—	—
1.9	TCR3DF19	—	—
2.4	TCR3DF24	—	—
2.5	TCR3DF25	TCR3DM25	TCR3DG25 *
2.7	TCR3DF27	—	—
2.75	TCR3DF275	—	—
2.8	TCR3DF28	TCR3DM28	TCR3DG28 *
2.85	TCR3DF285	TCR3DM285	TCR3DG285 *
2.9	TCR3DF29	—	—
2.95	TCR3DF295	—	—
3.0	TCR3DF30	TCR3DM30	TCR3DG30 *
3.1	TCR3DF31	—	TCR3DG31 *
3.2	TCR3DF32	TCR3DM32	TCR3DG32 *
3.3	TCR3DF33	TCR3DM33	TCR3DG33 *
3.35	TCR3DF335	—	—
3.5	—	TCR3DM35	TCR3DG35 *
3.6	TCR3DF36	TCR3DM36	TCR3DG36 *
3.9	TCR3DF39	—	—
4.0	TCR3DF40	—	—
4.5	TCR3DF45	TCR3DM45	TCR3DG45 *
Pin Configuration (Top View)	 1: V _{IN} 2: GND 3: CONTROL 4: NC 5: V _{OUT}		









• Please ask your local retailer about the devices with other output voltages.

*: New product / 新製品

• その他の電圧ランクは営業窓口とご相談ください。

Small Surface-Mount Low Dropout (LDO) Regulators / 小型面実装ロードレギュレータ (Single Output CMOS Type) / (CMOS, シングル出力)

□I_{OUT} (Max) = 200 mA

Output Voltage V _{OUT} (V) (Typ.)	Part Number							
	SMV  (mm)		ESV  (mm)		SDFN4  (mm)		WCSP4  (mm)	
Auto Discharge	Yes		Yes		Yes		No	
0.8	—	TCR2LF08 *	—	TCR2LE08 *	—	TCR2LN08 *	—	—
0.85	—	TCR2LF085 *	—	TCR2LE085 *	—	TCR2LN085 *	—	—
0.9	—	TCR2LF09 *	—	TCR2LE09 *	—	TCR2LN09 *	—	—
0.95	—	TCR2LF095 *	—	TCR2LE095 *	—	TCR2LN095 *	—	—
1.0	TCR2EF10	TCR2LF10 *	TCR2EE10	TCR2LE10 *	TCR2EN10	TCR2LN10 *	—	—
1.05	TCR2EF105	TCR2LF105 *	TCR2EE105	TCR2LE105 *	TCR2EN105	TCR2LN105 *	—	—
1.1	TCR2EF11	TCR2LF11 *	TCR2EE11	TCR2LE11 *	TCR2EN11	TCR2LN11 *	—	—
1.15	TCR2EF115	TCR2LF115 *	TCR2EE115	TCR2LE115 *	TCR2EN115	TCR2LN115 *	—	—
1.2	TCR2EF12	TCR2LF12 *	TCR2EE12	TCR2LE12 *	TCR2EN12	TCR2LN12 *	TCR2DG12	—
1.25	TCR2EF125	—	TCR2EE125	—	TCR2EN125	—	TCR2DG125	—
1.3	TCR2EF13	TCR2LF13 *	TCR2EE13	TCR2LE13 *	TCR2EN13	TCR2LN13 *	TCR2DG13	—
1.35	TCR2EF135	—	TCR2EE135	—	—	—	—	—
1.4	TCR2EF14	—	TCR2EE14	—	—	—	TCR2DG14	—
1.45	—	—	TCR2EE145	—	—	—	—	—
1.5	TCR2EF15	TCR2LF15 *	TCR2EE15	TCR2LE15 *	TCR2EN15	TCR2LN15 *	TCR2DG15	—
1.6	—	—	—	—	—	—	TCR2DG16	—
1.7	—	—	TCR2EE17	—	—	—	TCR2DG17	—
1.8	TCR2EF18	TCR2LF18 *	TCR2EE18	TCR2LE18 *	TCR2EN18	TCR2LN18 *	TCR2DG18	—
1.85	—	—	TCR2EE185	—	—	—	TCR2DG185	—
1.9	TCR2EF19	TCR2LF19 *	TCR2EE19	TCR2LE19 *	TCR2EN19	TCR2LN19 *	TCR2DG19	—
2.0	TCR2EF20	TCR2LF20 *	TCR2EE20	TCR2LE20 *	—	TCR2LN20 *	TCR2DG20	—
2.1	—	TCR2LF21 *	—	TCR2LE21 *	TCR2EN21	TCR2LN21 *	TCR2DG21	—
2.2	—	—	—	—	—	—	TCR2DG22	—
2.3	—	—	—	—	—	—	TCR2DG23	—
2.4	—	—	TCR2EE24	—	—	—	TCR2DG24	—
2.5	TCR2EF25	TCR2LF25 *	TCR2EE25	TCR2LE25 *	TCR2EN25	TCR2LN25 *	TCR2DG25	—
2.6	—	—	—	—	—	—	TCR2DG26	—
2.7	TCR2EF27	TCR2LF27 *	TCR2EE27	TCR2LE27 *	TCR2EN27	TCR2LN27 *	TCR2DG27	—
2.75	—	—	TCR2EE275	—	—	—	—	—
2.8	TCR2EF28	TCR2LF28 *	TCR2EE28	TCR2LE28 *	TCR2EN28	TCR2LN28 *	TCR2DG28	—
2.85	TCR2EF285	TCR2LF285 *	TCR2EE285	TCR2LE285 *	TCR2EN285	TCR2LN285 *	TCR2DG285	—
2.9	TCR2EF29	—	TCR2EE29	—	TCR2EN29	—	TCR2DG29	—
2.95	—	—	TCR2EE295	—	—	—	TCR2DG295	—
3.0	TCR2EF30	TCR2LF30 *	TCR2EE30	TCR2LE30 *	TCR2EN30	TCR2LN30 *	TCR2DG30	—
3.05	—	—	TCR2EE305	—	—	—	—	—
3.1	TCR2EF31	TCR2LF31 *	TCR2EE31	TCR2LE31 *	TCR2EN31	TCR2LN31 *	TCR2DG31	—
3.2	TCR2EF32	TCR2LF32 *	TCR2EE32	TCR2LE32 *	TCR2EN32	TCR2LN32 *	TCR2DG32	—
3.3	TCR2EF33	TCR2LF33 *	TCR2EE33	TCR2LE33 *	TCR2EN33	TCR2LN33 *	TCR2DG33	—
3.35	—	—	TCR2EE335	—	—	—	—	—
3.4	—	—	TCR2EE34	—	TCR2EN34	—	TCR2DG34	—
3.5	—	—	—	—	TCR2EN35	—	TCR2DG35	—
3.6	TCR2EF36	TCR2LF36 *	TCR2EE36	TCR2LE36 *	TCR2EN36	TCR2LN36 *	TCR2DG36	—
3.9	—	—	TCR2EE39	—	—	—	—	—
4.0	TCR2EF40	—	TCR2EE40	—	—	—	—	—
4.1	TCR2EF41	—	TCR2EE41	—	—	—	—	—
4.2	—	—	TCR2EE42	—	—	—	—	—
4.5	TCR2EF45	—	TCR2EE45	—	—	—	—	—
4.8	—	—	TCR2EE48	—	—	—	—	—
5.0	TCR2EF50	—	TCR2EE50	—	—	—	—	—
Pin Configuration (Top View)	 1: VIN 2: GND 3: CONTROL 4: NC 5: VOUT		 1: CONTROL 2: GND 3: VIN 4: VOUT 5: NC		 VIN CONTROL VOUT GND		 CONTROL VIN GND VOUT	






• Please ask your local retailer about the devices with other output voltages.

• その他の電圧ランクは営業窓口とご相談ください。

*: New product / 新製品

(Single Output Bipolar Type) / (バイポーラ, シングル出力)

□I_{OUT} (Max) = 200 mA

Output Voltage V _{out} (V) (Typ.)	Part Number		
	UFV	SMV	SMV
	 (mm)	 (mm)	 (mm)
1.5	TAR5S15U	TAR5S15	TAR5SB15
1.6	TAR5S16U	TAR5S16	TAR5SB16
1.7	TAR5S17U	TAR5S17	TAR5SB17
1.8	TAR5S18U	TAR5S18	TAR5SB18
1.9	TAR5S19U	TAR5S19	TAR5SB19
2.0	TAR5S20U	TAR5S20	TAR5SB20
2.1	TAR5S21U	TAR5S21	TAR5SB21
2.2	TAR5S22U	TAR5S22	TAR5SB22
2.3	TAR5S23U	TAR5S23	TAR5SB23
2.4	TAR5S24U	TAR5S24	TAR5SB24
2.5	TAR5S25U	TAR5S25	TAR5SB25
2.6	TAR5S26U	TAR5S26	TAR5SB26
2.7	TAR5S27U	TAR5S27	TAR5SB27
2.8	TAR5S28U	TAR5S28	TAR5SB28
2.9	TAR5S29U	TAR5S29	TAR5SB29
3.0	TAR5S30U	TAR5S30	TAR5SB30
3.1	TAR5S31U	TAR5S31	TAR5SB31
3.2	TAR5S32U	TAR5S32	TAR5SB32
3.3	TAR5S33U	TAR5S33	TAR5SB33
3.4	TAR5S34U	TAR5S34	TAR5SB34
3.5	TAR5S35U	TAR5S35	TAR5SB35
3.6	TAR5S36U	TAR5S36	TAR5SB36
3.7	TAR5S37U	TAR5S37	TAR5SB37
3.8	TAR5S38U	TAR5S38	TAR5SB38
3.9	TAR5S39U	TAR5S39	TAR5SB39
4.0	TAR5S40U	TAR5S40	TAR5SB40
4.1	TAR5S41U	TAR5S41	TAR5SB41
4.2	TAR5S42U	TAR5S42	TAR5SB42
4.3	TAR5S43U	TAR5S43	TAR5SB43
4.4	TAR5S44U	TAR5S44	TAR5SB44
4.5	TAR5S45U	TAR5S45	TAR5SB45
4.6	TAR5S46U	TAR5S46	TAR5SB46
4.7	TAR5S47U	TAR5S47	TAR5SB47
4.8	TAR5S48U	TAR5S48	TAR5SB48
4.9	TAR5S49U	TAR5S49	TAR5SB49
5.0	TAR5S50U	TAR5S50	TAR5SB50
Pin Configuration (Top View)	 1: CONTROL 2: GND 3: NOISE 4: V_{OUT} 5: V_{IN}		 1: V_{IN} 2: GND 3: CONTROL 4: NOISE 5: V_{OUT}

・ Please ask your local retailer about the devices with other output voltages.

・ その他の電圧ランクは営業窓口にご相談ください。

DC-DC Converters / DC-DC コンバータ用 IC

(System Power Supplies, Multi-Channel) / (システム電源, 多チャンネル)

Part Number	Input Supply Voltage (V)	Switching Frequency Typ. (kHz)	Package	Application	Features
TC7734FTG	3.4 to 5.5	1,000	QFN64	Tablet	Step-Down: 4ch, LDO: 3ch, LED driver: 2ch, 1.5 A battery charger function, USB adaptor detection, I ² C interface, Varied error detections and protections, programmable power sequence
TC7735FTG	4.5 to 16	1,000	QFN32	LCD Panel	Step-up/Down: 1ch, Step-down: 1ch, Charge pump: 1ch (positive) + 1ch (negative), Op-amp: 1ch
TC7738WBG	** 2.9 to 5.5	3000	WCSP45	SSD	Step-Down: 6ch, LDO: 2ch, LOAD-SW, BYPASS-SW, I ² C interface, Varied error detections and protections, programmable power sequence
TC7739FTG	** 4.5 to 5.5	2000	QFN32	Amusement	Step-Down: 2ch, LDO: 4ch, LOAD-SW, I ² C interface, Varied error detections and protections, programmable power sequence

** : Under development / 開発中

(Charge Controller ICs) / (充電制御 IC)

Part Number	Input Supply Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Switching Frequency Typ. (kHz)	Package	Features
TC7710AWBG	4.3 to 6.5	2 (max)	3.46 to 4.72	2 (max)	3000	WCSP25	Compliant with Battery Charging Spec rev1.2, OTG (On-the-Go) voltage output, temperature detection, 1-cell charging
TC7764WBG	—	—	4 to 5.5	1.2 (max)	—	WCSP28	WPC-compliant version 1.1 support at 5 W, magnetic induction, receiver side, I ² C communications, fail-safe feature, built-in controller circuit, FOD adjustment (by external resistor)
TC7765WBG	—	—	7 to 12	1 (max)	—	WCSP28	Magnetic induction, receiver side, I ² C communications, fail-safe feature, built-in controller circuit, FOD adjustment (by external resistor)
TC7766WBG	—	—	5 to 14	1.7 (max)	—	WCSP28	WPC-compliant version 1.2 support at 15 W, magnetic induction, receiver side, I ² C communications, fail-safe feature, built-in controller circuit, FOD adjustment (by external resistor)
TB6865AFG	4.5 to 14 ⁽¹⁾	—	—	—	—	LQFP100	WPC-compliant, magnetic induction, transmitter side, embedded MCU, 2-device control
TC7718FTG	4.5 to 14	—	—	—	—	QFN36	WPC-compliant version 1.2 support at 15 W, magnetic induction, transmitter side, 2-coil control

Note (1): Analog circuitry rating / アナログ回路の規格表記となります。

(PFC Controller ICs) / (PFC 制御 IC)

Part Number	Control Method	Input Supply Voltage (V)	Package	Features
TB6819AFG	CRM	9.5 to 25	SOP8	Brown-out protection

Motor Drivers / モータドライバ

Brushed DC Motor Driver ICs / ブラシ付きモータドライバ

Part Number	Maximum Ratings		Output Ron	Circuits (Ch)	C.C. PWM	Single Power Supply	Protection			Temp. Range T _A	Package	Pin, Package & Function Compatible Device
	Voltage (V)	Current (A)					UVLO	ISD	TSD			
TB62212FTAG/FNG ☆	40	2.0	2.20	4	●	●	●	○	○	−40 to +85°C	QFN48/HTSSOP48	
TB62212FTAG/FNG ☆	40	4.0	1.10	2	●	●	●	○	○	−40 to +85°C	QFN48/HTSSOP48	
TB62216FTG/FNG/FG ☆	40	2.5	0.89	2	●	●	●	○	○	−20 to +85°C	QFN48/HTSSOP48/ HSOP28	
TB6549FG/PG	30	3.5	1.00	1		●		◇	◇	−20 to +85°C	HSOP20/DIP16	
TB6549HQ	30	4.5	1.00	1		●		◇	◇	−20 to +85°C	HZIP25	
TB6552FTG/FNG ☆	15	1.0	1.50	2					◇	−20 to +85°C	QFN16/SSOP16	
TB6559FG	50	2.5	1.30	1	●	●		◇	◇	−30 to +85°C	HSOP16	
TB6561NG/FG	40	1.5	1.50	2		●		◇	◇	−20 to +85°C	SDIP24/SSOP30	
TB6568KQ	50	3.0	0.55	1		●	●	○	○	−40 to +85°C	HSIP7	TB6643KQ
TB6569FG	50	4.5	0.55	1	●	●	●	○	○	−40 to +85°C	HSOP16	
TB6569FTG * ☆	50	4.5	0.55	1	●	●	●	○	○	−40 to +85°C	QFN32	
TB6593FNG ☆	15	3.2	0.35	1			●		◇	−20 to +85°C	SSOP20	
TB6612FNG ☆	15	3.2	0.50	2			●		◇	−20 to +85°C	SSOP24	
TB6613FTG ☆	6	0.8	1.50	8	●		●		◇	−20 to +85°C	QON44	
TB6614FNG ☆	15	3.2	0.30	1			●	◇	◇	−20 to +85°C	SSOP16	
TB6640FTG/AFTG ☆	40	3.0	1.00	1	●		●	○/◇	○/◇	−40 to +85°C	QFN48	
TB6641FG	50	4.5	0.55	1	●	●	●	○	○	−40 to +85°C	HSOP16	
TB6641FTG * ☆	50	4.5	0.55	1	●	●	●	○	○	−40 to +85°C	QFN32	
TB6642FG	50	4.5	0.55	1		●	●	○/◇	○/◇	−40 to +85°C	HSOP16	
TB6642FTG * ☆	50	4.5	0.55	1		●	●	○/◇	○/◇	−40 to +85°C	QFN32	
TB6643KQ	50	4.5	0.55	1		●	●	○	○	−40 to +85°C	HSIP7	TB6568KQ
TB67H301FTG *	40	3.0	1.00	1	●		●	○/◇	○/◇	−40 to +85°C	QFN24	
TB67H302HG	50	5.0	0.40	2	●	●	●	○	○	−30 to +85°C	HZIP25	
TB67H303HG	50	10.0	0.20	1	●	●	●	○	○	−30 to +85°C	HZIP25	
TB67H400AFTG/FNG/NG * ☆	50	4.0	0.49	2	●	●	●	○	○	−20 to +85°C	QFN48/HTSSOP48/ SDIP24	TB67H410FTG/NG
TB67H400AHG *	50	4.0	0.49	2	●	●	●	○	○	−20 to +85°C	HZIP25	
TB67H400AFTG/FNG/NG * ☆	50	8.0	0.25	1	●	●	●	○	○	−20 to +85°C	QFN48/HTSSOP48/ SDIP24	TB67H410FTG/NG
TB67H400AHG *	50	8.0	0.25	1	●	●	●	○	○	−20 to +85°C	HZIP25	
TB67H410FTG/NG * ☆	50	2.5	0.80	2	●	●	●	○	○	−20 to +85°C	QFN48/SDIP24	TB67H400AFTG/NG
TB67H410FTG/NG * ☆	50	5.0	0.40	1	●	●	●	○	○	−20 to +85°C	QFN48/SDIP24	TB67H400AFTG/NG
TC78H600FTG	18	1.0	1.20	2	●		●	○	◇	−20 to +85°C	QFN24	
TC78H600FNG ☆	18	1.0	1.20	2	●		●	○	◇	−20 to +85°C	SSOP20	
TC78H610FNG * ☆	18	1.0	1.20	2			●	○	◇	−20 to +85°C	SSOP16	
TC78H620FNG * ☆	18	1.0	1.20	2			●	○	◇	−20 to +85°C	SSOP16	
TC78S121FTG/FNG ** ☆	40	3.5	0.60	4	●	●	●	○	◇	−20 to +85°C	QFN48/HTSSOP48	
TC78S121FTG/FNG ** ☆	40	5.0	0.30	2	●	●	●	○	◇	−20 to +85°C	QFN48/HTSSOP48	
TC78S122FTG/FNG ** ☆	40	3.5	0.60	4	●	●	●	○	◇	−20 to +85°C	QFN48/HTSSOP48	
TC78S122FTG/FNG ** ☆	40	5.0	0.30	2	●	●	●	○	◇	−20 to +85°C	QFN48/HTSSOP48	

☆: Dry-packed / 防湿梱包品

*: New product / 新製品

UVLO: Undervoltage Lockout

** : Under development / 開発中

ISD: Overcurrent detection

TSD: Thermal shutdown

○ Latch

◇ Auto

Brushless Motor Driver ICs / ブラシレスモータドライバ

Part Number	Phases		Controller	Pre Driver	Driver	Maximum Ratings		Sensorless	Hall Sensor Inputs	Commutation		Lead Angle Control				Temp. Range T _A	Package
	3-Phase	1-Phase				Voltage (V)	Current (A)			Square	Sine	External Input	Auto (current FB)	Auto (rpm FB)	Auto (InPAC)		
TB6551FAG	☆	●		●		12	0.002		●		●	●				−30 to +115°C	SSOP24
TB6556FG	☆	●		●		12	0.002		●		●	●	●			−30 to +115°C	SSOP30
TB6575FNG	☆	●		●		5.5	0.02	●		●		●				−30 to +105°C	SSOP24
TB6584FNG/AFNG	☆	●		●		18	0.002		●		●	●	●			−30 to +115°C	SSOP30
TB6585FG/AFTG	☆	●			●	45	1.8		●		●	●	●			−30 to +85°C	HSOP36/QFN48
TB6586FG/AFG/BFG	☆	●		●		18	0.002		●	●		●				−30 to +115°C	SSOP24
TB6588FG	☆	●			●	50	2.5	●		●		●				−30 to +105°C	HSOP36
TB6603FTG	☆	●		●		30	0.02		●		●	●				−30 to +85°C	QFN36
TB6604FTG	☆	●		●		30	0.02		●		●		●			−30 to +85°C	QFN48
TB6605FTG	☆	●		●		30	0.02		●		●	●		●		−30 to +85°C	QFN36
TB6631FNG	☆	●		●		18	0.002		●		●	●		●		−30 to +115°C	SSOP30
TB6633FNG/AFNG	☆	●			●	25	1.0	●		●		●				−30 to +105°C	SSOP24
TB6634FNG	☆	●		●		18	0.002		●		●	●	●			−30 to +115°C	SSOP30
TB67B000HG		●			●	500	2.0		●	●	●	●				−30 to +115°C	HDIP30
TB67B001FTG/AFTG	* ☆	●			●	25	3.0	●		●		●		●		−40 to +105°C	QFN36
TB67B008FNG/AFNG/BFNG/CFNG	* ☆	●			●	25	3.0	●		●		●		●		−40 to +105°C	SSOP24
TB67B008FTG/AFTG/BFTG/CFTG	* ☆	●			●	25	3.0	●		●		●		●		−40 to +105°C	QFN24
TB67Z800FTG	* ☆	●			●	25	3.0									−40 to +105°C	QFN36
TC78B002FTG/FNG	* ☆		●		●	18	1.5		●	●	●	●				−40 to +105°C	QFN16/SSOP16
TC78B006FNG/AFNG/BFNG/CFNG	* ☆		●	●		40	0.02		●	●	●					−40 to +105°C	SSOP16
TC78B006FTG/AFTG/BFTG/CFTG	* ☆		●	●		40	0.02		●	●	●					−40 to +105°C	QFN16
TC78B016FTG	* ☆	●			●	40	3.0		●		●	●		●	●	−40 to +105°C	QFN36
TC78B015BFTG/CFTG	** ☆	●			●	36	3.0		●	●		●		●		−40 to +105°C	QFN36

☆: Dry-packed / 防湿梱包品

*: New product / 新製品

** : Under development / 開発中

Stepper Motor Drivers / ステッピングモータドライバ

Part Number	Motor Type		Interface			Maximum Ratings		Stepping Mode							DC-DC Converter	Single Power Supply	Protection			Temp. Range T _A	Packages	
	Bipolar	Unipolar	Clock	Phase	Serial	Voltage (V)	Current (A)	Constant Current Cont.	Full	Half	1/4	1/8	1/16	1/32			UVLO ⁽²⁾	ISD ⁽³⁾	TSD ⁽⁴⁾			
TB62206FG	☆	●		●		40	1.8	●	●	●						●	●	●	●	−40 to +85°C	HSOP20	
TB62208FTG/FNG/FG	☆	●		●		40	1.8	●	●	●						●	●	●	●	−20 to +85°C	QFN48/HTSSOP48/HSOP28	
TB62209FG	☆	●	●			40	1.8	●	●	●	●	●	●				●	●	●	●	−40 to +85°C	HSOP36
TB62210FNG	☆	●		●		40	1.0	●	●	●	●					●	●	●	●	−20 to +85°C	HTSSOP24	
TB62211FNG	☆	●	●			40	1.0	●	●	●	●					●	●	●	●	−20 to +85°C	HTSSOP24	
TB62212FTAG/FNG	☆	●		●		40	1.5 x 2ch	●	●	●						●	●	●	●	−40 to +85°C	QFN48/HTSSOP48	
TB62213AFTG/FNG/FG	☆	●		●		40	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48/HSOP28	
TB62213AHQ		●		●		40	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	HZIP25	
TB62214AFTG/FNG/FG	☆	●	●			40	2.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48/HSOP28	
TB62215AFTG/FNG/FG	☆	●	●			40	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48/HSOP28	
TB62215AHQ		●	●			40	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	HZIP25	
TB62217AFG	☆	●			●	50	1.3 x 2ch	●	●	●	●	●	●		3ch	●	●	●	●	−40 to +85°C	HQFP64	
TB62218AFTG/FNG/FG	☆	●		●		40	2.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48/HSOP28	
TB62237BFG	☆	●			●	40	1.3 x 2ch	●	●	●	●	●	●	●	3ch	●	●	●	●	−40 to +85°C	HQFP64	
TB62247AFG	☆	●			●	40	1.3 x 2ch	●	●	●	●	●	●	●	3ch	●	●	●	●	−40 to +85°C	HQFP64	
TB62261FTAG	☆	●		●		40	1.5	●	●	●	●					●	●	●	●	−20 to +85°C	QFN36	
TB62261FTG	☆	●		●		40	1.8	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48	
TB62262FTAG	☆	●	●			40	1.5	●	●	●	●					●	●	●	●	−20 to +85°C	QFN36	
TB62262FTG	☆	●	●			40	1.8	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48	
TB62269FTG	☆	●	●			40	1.8	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	QFN48	
TB6560AFTG/FG		●	●			40	2.5	●	●	●		●	●					●		−30 to +85°C	QFN48/HQFP64	
TB6560AHQ		●	●			40	3.5	●	●	●		●	●					●		−30 to +85°C	HZIP25	
TB6562ANG/AFG		●		●		40	1.5	●	●	●	●					●		●	●	−20 to +85°C	SDIP24/SSOP30	
TB6600FG/HG		●	●			50	4.5/5.0	●	●	●	●	●	●	●		●	●	●	●	−30 to +85°C	HQFP64/HZIP25	
TB6608FNG		●	●			15	0.8	●	●	●	●	●					●		●	−20 to +85°C	SSOP20	
TB6615PG		●	●			28	0.4		●	●										−30 to +85°C	DIP16	
TB6674FAG		●		●		24	0.2		●								●	●	●	−30 to +85°C	SSOP16	
TB6674PG/FG		●		●		24	0.4		●								●	●	●	−30 to +85°C	DIP16/HSOP16	
TB67S101AFTG/FNG	* ☆	●		●		50	4.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48	
TB67S102AFTG/FNG	* ☆	●	●			50	4.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48	
TB67S103AFTG	* ☆	●	●		●	50	4.0	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	QFN48	
TB67S105FTG	* ☆	●			●	50	3.0	●	●	●						●	●	●	●	−20 to +85°C	QFN48	
TB67S109AFTG/FNG	* ☆	●		●		50	4.0	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	QFN48/HTSSOP48	
TB67S141FTG/NG	* ☆		●		●	84	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/SDIP24	
TB67S141HG	*		●	●		84	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	HZIP25	
TB67S142FTG/NG	* ☆		●	●		84	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/SDIP24	
TB67S142HG	*		●	●		84	3.0	●	●	●	●					●	●	●	●	−20 to +85°C	HZIP25	
TB67S145FTG	* ☆		●		●	84	3.0	●	●	●						●	●	●	●	−20 to +85°C	QFN48	
TB67S149FTG/FG	* ☆		●	●		84	3.0	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	QFN48/HSSOP28	
TB67S149HG	*		●	●		84	3.0	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	HZIP25	
TB67S158FTG	* ☆		●	●	●	80	3.0 x 1ch		●	●						●	●	●	●	−20 to +85°C	QFN48	
TB67S158FTG	* ☆		●	●	●	80	1.5 x 2ch		●	●						●	●	●	●	−20 to +85°C	QFN48	
TB67S158NG	*		●		●	80	1.5 x 2ch		●	●						●	●	●	●	−20 to +85°C	SDIP24	
TB67S179FTG	* ☆		●	●		80	1.5	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	QFN48	
TB67S213FTAG	☆	●		●		40	2.5	●	●	●	●					●	●	●	●	−20 to +85°C	QFN36	
TB67S215FTAG	☆	●	●			40	2.5	●	●	●	●					●	●	●	●	−20 to +85°C	QFN36	
TB67S261FTG	* ☆	●		●		50	2.0	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48	
TB67S265FTG	* ☆	●			●	50	2.0	●	●	●						●	●	●	●	−20 to +85°C	QFN48	
TB67S269FTG	* ☆	●		●		50	2.0	●	●	●	●	●	●	●		●	●	●	●	−20 to +85°C	QFN48	
TC78S121FTG/FNG	** ☆	●		●		40	2.0 x 2ch	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48	
TC78S122FTG/FNG	** ☆	●	●			40	2.0 x 2ch	●	●	●	●					●	●	●	●	−20 to +85°C	QFN48/HTSSOP48	
TC78S600FTG/FNG		●	●			18	1.0	●		●	●	●	●				●	●	●	−20 to +85°C	QFN24/SSOP20	
TB6613FTG ⁽¹⁾	☆	●	●		●	6	0.8	●	⁽⁵⁾								●		●	−20 to +85°C	QON44	

☆: Dry-packed / 防湿梱包品

*: New product / 新製品

Note (1): 6-Bit μ Step decoder / 6 bit マイクロステップデコーダ

** : Under development / 開発中

(2): Undervoltage Lockout / 低電圧検出回路

(3): Overcurrent detection / 過電流検出回路

(4): Thermal shutdown / 過熱検出回路

(5): The TB6613 provides half-step and 1/64-step modes. / TB6613のStepping Modeは、Half stepと1/64 stepに対応しております。

・ Transistor arrays can also be used to drive unipolar stepping motors. For details of transistor arrays, see the section "Transistor Array Lineup" on page 145.

・ ユニポーラタイプのステッピングモータ駆動用として、トランジスタアレイも使用されております。詳細は145頁 (Transistor Array Lineup) をご参照願います。

LED Drivers / LEDドライバ

LED Display Drivers / LEDディスプレイ用ドライバ

Part Number	Package	Applications	Features	Supply Voltage (V)
TB62720FG	HQFP64	LED Display for high-quality	16-ch constant-current driver with 8-bit PWM control, dot correction	6
TB62747AFG/AFNG	SSOP24	LED Display for general	16-ch constant-current driver	6
TB62777FNG/FG	SSOP16	LED Display for general and small	8-ch constant-current driver	6
TB62781FNG	SSOP20	LED Illumination	2-wire I/F 9-ch constant-current driver with 7-bit PWM control	6
TB62785NG/FTG	SDIP24/QFN24	LED Display for 7 segment of 4 digits	4-digit driver and 8-ch constant-current driver with 7 segment decoder	6
TB62D612FTG	WQFN36	LED Illumination	2-wire 24-ch constant-current driver with 7-bit PWM control	6
TC62D722CFNG	HTSSOP24	LED Display for high-gradation	16-ch constant-current driver with 16-bit PWM control	6
TC62D723FNG/FNAG	HTSSOP24/QSOP24	LED Display for high-gradation	16-ch constant-current driver with 16-bit PWM control	6
TC62D748CFG/CFNAG	SSOP24/QSOP24	LED Display for general	16-ch constant-current driver	6
TC62D749CFG/CFNAG	SSOP24/QSOP24	LED Display for general	16-ch constant-current driver (constant current of fast response)	6
TC62D776CFNAG	QSOP24	LED Display for brightness control	16-ch constant-current driver with gain control	6
TB62D786FTG *	VQFN24	LED Illumination	1-wire I/F 9-ch constant-current driver with 7-bit PWM control	5 or 7 to 28

*: New product / 新製品

LED Drivers for LED Lighting / LED照明用ドライバ

Part Number	Package	Applications	Features	Supply Voltage (V)
TB62D901FNG	SSOP16	LED lighting	LED driver for non-isolated LED lighting applications	12 to 30
TC62D902FG	SOP8	LED lighting	Offline Isolated Flyback LED controller with PFC	12 to 25

LED Backlightings Drivers / LEDバックライト用ドライバ

Part Number	Package	Applications	Features	Supply Voltage (V)
TB62763FMG	SON-8	White LED backlighting	Constant-current step-up DC/DC converter, designed for large-current drive	6
TB62771FTG	WQFN20	White LED backlighting	Constant-current step-up DC/DC converter with 4 LED segment	4.75 to 40

Intelligent Power Devices (IPDs) / インテリジェントパワーデバイス (IPD)

60 V Series / 60 V シリーズ

(High-Side Switches) / (ハイサイドスイッチ)

Part Number	Package	# Outputs	V _{DSS} (V)	I _O (A)	Junction Temperature T _J (°C)	Characteristics									Operating Temperature T _{opr} (°C)	Operating Supply Voltage (V)
						R _{DS(ON)} (Ω) Max	Power Dissipation P _D (W)	Protective Functions			Diagnostic Functions					
								Over- current (A)	Over- temperature (°C)	Over- voltage (V)	Over- current	Open Load	Over- temperature	Over- voltage		
TPD1052F	PS-8	1 ch	40	0.8	150	0.8	0.7 (mounted on board)	1.2 A (clamp) 0.8 A (duty) Min	150 Min	—	○	—	○	—	−40 to 125	5 to 18
TPD1053F	SOP-8	1 ch	60	3		0.12	1.1 (mounted on board)	3 A Min	150 Min	Active clamp -16 V Typ.	○	○	○	—	−40 to 125	5 to 18
TPD1055FA	WSO10	1 ch	40	3		0.12	1.84 (mounted on board)	3 A Min	150 Min	—	○	○	○	—	−40 to 125	5 to 18
TPD1060F	SOP-8	1 ch	40	3		0.12	0.9 (mounted on board)	3 A Min	150 Min	—	○	○	○	—	−40 to 125	4 to 18

(Low-Side Switches) / (ローサイドスイッチ)

Part Number	Package	# Outputs	V _{DSS} (V)	I _O (A)	Junction Temperature T _J (°C)	Characteristics									Operating Temperature T _{opr} (°C)	Operating Supply Voltage (V)
						R _{DS(ON)} (Ω) Max	Power Dissipation P _D (W)	Protective Functions			Diagnostic Functions					
								Over- current (A)	Over- temperature (°C)	Over- voltage (V)	Over- current	Open Load	Over- temperature	Over- voltage		
TPD1030F	SOP-8	2 ch	40	1	150	0.6	2.0 (t = 10 s) (mounted on board)	1 A Min	150 Min	Active clamp 40 V Min	—	—	—	—	−40 to 110	up to 40
TPD1032F	SOP-8	2 ch	20	3		0.4	0.95 (mounted on board)	3 A Min	150 Min	Active clamp 40 V Min	—	—	—	—	−40 to 110	up to 20
TPD1036F	SOP-8	2 ch	30	1.5		0.5	2.0 (t = 10 s) (mounted on board)	1.5 A Min	150 Min	Active clamp 40 V Min	—	—	—	—	−40 to 110	up to 30
TPD1039F	SOP-8	1 ch	45	1.5		0.25	1.1 (mounted on board)	5 A Typ.	125 Min	Active clamp 45 V Min	—	—	—	—	−40 to 85	up to 45
TPD1044F	PS-8	1 ch	41	1		0.6	0.9 (mounted on board)	1 A Min	150 Min	Active clamp 41V Min	—	—	—	—	−40 to 125	up to 41
TPD1046F	SOP-8	2 ch	40	3		0.2	0.95 (mounted on board)	3 A Min	150 Min	Active clamp 40 V Min	—	—	—	—	−40 to 125	up to 20
TPD1054F	PS-8	1 ch	40	1		0.8	0.7 (mounted on board)	1 A Min	150 Min	Active clamp 40 V Min	○	○	○	—	−40 to 125	V _{OUT} = up to 40 V _{DD} = 4.5 to 5.5
TPD1058FA	WSO10	1 ch	40	6		0.1	1.84 (mounted on board)	6 A Min	150 Min	Active clamp 40 V Min	○	○	○	—	−40 to 125	V _{OUT} = up to 40 V _{DD} = 4.5 to 5.5

60 V Series / 60 Vシリーズ
(Pre-drivers) / (プリドライバ)

Part Number	Package	Configuration	# Outputs	Supply Voltage V _{DD} (V)	Io (A)	Junction Temperature T _J (°C)	Characteristics								Operating Temperature T _{opr} (°C)	Operating Supply Voltage (V)	
							Power Dissipation P _D (W)	Protective Functions				Diagnostic Functions					
								Over-current (A)	Overvoltage/ Undervoltage (V)		Battery Reverse Protection	Over-current	Overvoltage/ Undervoltage				
Over-voltage	Under-voltage	Over-voltage	Under-voltage														
TPD7101F ☆	SSOP-24	High-side Power-MOSFET driver (with built-in charge pump)	2 ch	30	Source current 0.1A Typ. Sink current 0.1A Typ.	150	0.8	Adjustable	—	V _{DD} : 4.5 V Max	—	○	—	○	−40 to 110	8 to 18	
TPD7102F	PS-8	High-side Power-MOSFET driver (with built-in charge pump)	1 ch	25	Source current 1mA Typ.		0.7	—	V _{DD} : 18 V Min	—	—	High-side N-ch Power-MOSFET VGS monitor			−40 to 125	7 to 18	
TPD7104F	PS-8	High-side Power-MOSFET driver (with built-in charge pump)	1 ch	24	Source current Internal capacity Sink current 0.5mA Max		0.7	Adjustable	V _{OUT} : V _{DD} + 15.7 V Typ.	—	—	○	—	—	−40 to 125	5 to 18	
TPD7104AF	PS-8	High-side Power-MOSFET driver (with built-in charge pump)	1 ch	24	Source current Internal capacity Sink current 0.5mA Max		0.7	Adjustable	V _{OUT} : V _{DD} + 15.7 V Typ.	—	○	○	—	—	−40 to 125	5 to 18	
TPD7210F ☆	SSOP-24	Power-MOSFET driver for 3-phase bridge (with built-in charge pump)	6 ch	30	Source current 1A Max Sink current 1A Max		0.8	—	—	—	—	Input arm-short detection		○	−40 to 125	4.5 to 18	
TPD7211F	PS-8	Half-bridge Power-MOSFET driver (for high-side P-ch MOSFET drive)	2 ch	30	Source current 0.5A Max Sink current 0.5A Max		0.7	—	—	—	—	—	—	—	−40 to 125	5 to 18	
TPD7212F ☆☆☆	WQFN32	Power-MOSFET driver for 3-phase bridge (with built-in charge pump)	6 ch	25	Source current −1.0A Max Sink current +1.5A Max		TBD	—	V _{DL} : 18 V Typ.	—	—	—	—	○ (VDL)	○ (VDH, VDL)	−40 to 125	4.5 to 18

☆: Dry-packed / 防湿梱包品

** : Under development / 開発中

250 V/500 V/600 V Series / 250 V/500 V/600 V シリーズ



Part Number	Package	Functions	Output Type	Characteristics				Absolute Maximum Ratings (Ta = 25°C)	
				Features	Protective Functions				
					Overcurrent	Over-temperature	Undervoltage	V _{BB} (V)	I _{OUT} (A)
TPD4131K	DIP26	Hall amp input, PWM, 3-phase decoder	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	250	1
TPD4151K	DIP26	Hall amp input, PWM, 3-phase decoder	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	250	1
TPD4132K	DIP26	Hall amp input, PWM, 3-phase decoder	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	1
TPD4142K	DIP26	Hall amp input, PWM, 3-phase decoder	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	1
TPD4146K	DIP26	Hall amp input, PWM, 3-phase decoder FGC	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	1
TPD4123K	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	1
TPD4123AK	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	—	○	○	500	1
TPD4134K	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	2
TPD4134AK	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	—	○	○	500	2
TPD4144K	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	2
TPD4144AK	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	—	○	○	500	2
TPD4135K	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	3
TPD4135AK	DIP26	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	—	○	○	500	3
TPD4152K	* DIP26	Hall amp input, PWM, 3-phase decoder	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	600	0.7
TPD4152F	* HSSOP31	Hall amp input, PWM, 3-phase decoder	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	600	0.7
TPD4204F	** SOP30	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	600	2.5
TPD4206F	** SOP30	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	500	2.5
TPD4207F	** SOP30	6-input, low-side driver, high-side driver, 3 shunt type	3-phase full-bridge	High-voltage PWM Brushless DC motor driver	○	○	○	600	5

*: New product / 新製品

**: Under development / 開発中



Operational Amplifier ICs (Op Amp ICs) & Comparator ICs / オペアンプ/コンパレータ

Operational Amplifier ICs (Op Amp ICs) & Comparator ICs / オペアンプ/コンパレータ
(Bipolar, Single-Circuit Type) / (バイポーラ, シングル品)

Part Number	Package	Marking	Functions	Features	Supply Voltage (V)	Internal Connections
TA75S393F	SMV	TA	Bipolar comparator	Single/dual power supply, open-collector output	2 to 36 or ±1 to ±18	(Unit: mm) 
TA75S01F	SMV	SA	Bipolar Op Amp	Single/dual power supply, unity gain stable	3 to 12 or ±1.5 to ±6	(Unit: mm) 
TA75S558F	SMV	SB		Dual power supply	±4 to ±18	

- Note that input pin configurations of the single op amp and comparator ICs differ. US8 and SM8 have the same pin configuration.
- The internal connection diagrams only show the general configurations of the circuits.
- シングルタイプのアンプとコンパレータの入力端子のピン配置が異なりますのでご注意ください。なお、US8, SM8タイプは同一のピン配置です。
- 内部接続図はイメージ図です。

(Bipolar, Dual-Circuit Type) / (バイポーラ, デュアル品)

Part Number	Package	Marking	Functions	Features	Supply Voltage (V)	Internal Connections
TA75W393FU	SM8	5W393	Bipolar comparator	Single/dual power supply, open-collector output	2 to 36 or ±1 to ±18	(Unit: mm) 
TA75W01FU	SM8	5W01	Bipolar Op Amp	Single/dual power supply, unity gain stable	3 to 12 or ±1.5 to ±6	
TA75W558FU	SM8	5W558		Dual power supply	±4 to ±18	

- The internal connection diagrams only show the general configurations of the circuits.
- 内部接続図はイメージ図です。

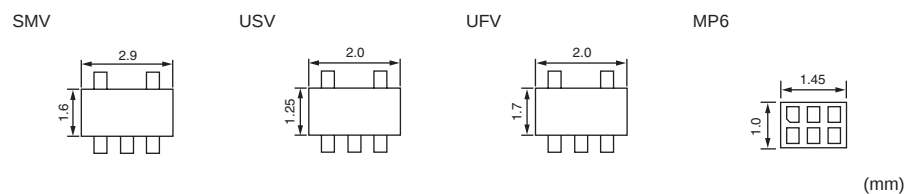
(CMOS, Single-Circuit Type) / (CMOS, シングル品)

Part Number	Package	Marking	Functions	Features	Supply Voltage (V)	Internal Connections
TC75S56F	SMV	TC	CMOS comparator	Single/dual power supply, push-pull output, ultra-low current consumption	1.8 to 7 or ±0.9 to ±3.5	
TC75S56FU	USV					
TC75S57F	SMV	TD		Single/dual power supply, push-pull output, low current consumption	1.8 to 7 or ±0.9 to ±3.5	
TC75S57FU	USV					
TC75S58F	SMV	TE		Single/dual power supply, open-drain output, ultra-low current consumption	1.8 to 7 or ±0.9 to ±3.5	
TC75S58FU	USV					
TC75S59F	SMV	TF		Single/dual power supply, open-drain output, low current consumption	1.8 to 7 or ±0.9 to ±3.5	
TC75S59FU	USV					
TC75S70L6X *	MP6	VQ	CMOS comparator with a full range of input and output voltages	Single/dual power supply, full range of input and output voltages, low bias current, low-voltage operation	1.3 to 4.6 or ±0.65 to ±2.3	
TC75S51F	SMV	SC	CMOS Op Amp	Single/dual power supply, low-voltage operation	1.5 to 7 or ±0.75 to ±3.5	
TC75S51FU	USV					
TC75S54F	SMV	SE		Single/dual power supply, low-voltage operation, low current consumption	1.8 to 7 or ±0.9 to ±3.5	
TC75S54FU	USV					
TC75S55F	SMV	SF		Single/dual power supply, low-voltage operation, ultra-low current consumption	1.8 to 7 or ±0.9 to ±3.5	
TC75S55FU	USV					
TC75S63TU	UFV	SP		Single/dual power supply, low current consumption, low noise	2.2 to 5.5 or ±1.1 to ±2.75	




- Note that input pin configurations of the single op amp and comparator ICs differ. US8 and SM8 have the same pin configuration.
- The internal connection diagrams only show the general configurations of the circuits.
- シングルタイプのオペアンプとコンパレータの入力端子のピン配置が異なりますのでご注意ください。なお、US8, SM8 タイプは同一のピン配置です。
- 内部接続図はイメージ図です。

*: New product / 新製品

Package Lineup / パッケージラインアップ



Operational Amplifier ICs (Op Amp ICs) & Comparator ICs / オペアンプ/コンパレータ
(CMOS, Dual-Circuit Type) / (CMOS, デュアル品)

Part Number	Package	Marking	Functions	Features	Supply Voltage (V)	Internal Connections	
TC75W56FU	SM8	5W56	CMOS comparator	Single/dual power supply, push-pull output, ultra-low current consumption	1.8 to 7 or ± 0.9 to ± 3.5	SM8 (Unit: mm) 	
TC75W56FK	US8						
TC75W57FU	SM8	5W57		Single/dual power supply, push-pull output, low current consumption	1.8 to 7 or ± 0.9 to ± 3.5		
TC75W57FK	US8						
TC75W58FU	SM8	5W58		Single/dual power supply, open-drain output, ultra-low current consumption	1.8 to 7 or ± 0.9 to ± 3.5		
TC75W58FK	US8						
TC75W59FU	SM8	5W59		Single/dual power supply, open-drain output, low current consumption	1.8 to 7 or ± 0.9 to ± 3.5		
TC75W59FK	US8						
TC75W70L8X *	SOT-902	W70	CMOS comparator with a full range of input and output voltages	Single/dual power supply, full range of input and output voltages, low bias current, low-voltage operation	1.3 to 4.6 or ± 0.65 to ± 2.3	US8 	
TC75W51FU	SM8	5W51	CMOS Op Amp	Single/dual power supply, low-voltage operation	1.5 to 7 or ± 0.75 to ± 3.5	SOT-902 	
TC75W51FK	US8						
TC75W54FU	SM8	5W54		Single/dual power supply, low-voltage operation, low current consumption	1.8 to 7 or ± 0.9 to ± 3.5		
TC75W54FK	US8						
TC75W55FU	SM8	5W55		Single/dual power supply, low-voltage operation, ultra-low current consumption	1.8 to 7 or ± 0.9 to ± 3.5		
TC75W55FK	US8						

• The internal connection diagrams only show the general configurations of the circuits.

*: New product / 新製品

• 内部接続図はイメージ図です。

Transistor Arrays / トランジスタアレイ

Transistor Arrays / トランジスタアレイ

Part Number	Type		Maximum Ratings		Input Level	Input Voltage Range (V)	Inductive Load	Common Diode	Temp. Range T _A	Package	Existing Part Number
	Output Type	Ch	Output Voltage (V)	Output Current (A)							
TBD62064APG *	Sink	4ch	50	1.5	High	2.5 to 25	●	●	−40 to +85°C	DIP16	TD62064APG
TBD62064AFG *	Sink	4ch	50	1.5	High	2.5 to 25	●	●	−40 to +85°C	HSOP16	TD62064AFG
TBD62064AFAG *	Sink	4ch	50	1.5	High	2.5 to 25	●	●	−40 to +85°C	SSOP24	TD62064AFG
TBD62308APG *	Sink	4ch	50	1.5	Low	0 to VCC-3.5 V	●	●	−40 to +85°C	DIP16	TD62308APG
TBD62308AFG *	Sink	4ch	50	1.5	Low	0 to VCC-3.5 V	●	●	−40 to +85°C	HSOP16	TD62308AFG
TBD62308AFAG *	Sink	4ch	50	1.5	Low	0 to VCC-3.5 V	●	●	−40 to +85°C	SSOP24	TD62308AFG
TBD62003APG *	Sink	7ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	DIP16	TD62003APG, ULN2003APG
TBD62003AFG *	Sink	7ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	SOP16	TD62003AFG, ULN2003AFWG
TBD62003AFNG *	Sink	7ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	SSOP16	TD62003AFG, ULN2003AFWG
TBD62003AFWG *	Sink	7ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	SOL16	TD62003AFG, ULN2003AFWG
TBD62004APG *	Sink	7ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	DIP16	TD62004APG, ULN2004APG
TBD62004AFG *	Sink	7ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	SOP16	TD62004AFG, ULN2004AFWG
TBD62004AFNG *	Sink	7ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	SSOP16	TD62004AFG, ULN2004AFWG
TBD62004AFWG *	Sink	7ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	SOL16	TD62004AFG, ULN2004AFWG
TBD62502APG *	Sink	7ch	50	0.3	High	14 to 25	—	—	−40 to +85°C	DIP16	TD62502PG
TBD62502AFG *	Sink	7ch	50	0.3	High	14 to 25	—	—	−40 to +85°C	SOP16	TD62502FG
TBD62502AFNG *	Sink	7ch	50	0.3	High	14 to 25	—	—	−40 to +85°C	SSOP16	TD62502FNG
TBD62502AFWG *	Sink	7ch	50	0.3	High	14 to 25	—	—	−40 to +85°C	SOL16	TD62502FG
TBD62503APG *	Sink	7ch	50	0.3	High	2.5 to 25	—	—	−40 to +85°C	DIP16	TD62503PG
TBD62503AFG *	Sink	7ch	50	0.3	High	2.5 to 25	—	—	−40 to +85°C	SOP16	TD62503FG
TBD62503AFNG *	Sink	7ch	50	0.3	High	2.5 to 25	—	—	−40 to +85°C	SSOP16	TD62503FNG
TBD62503AFWG *	Sink	7ch	50	0.3	High	2.5 to 25	—	—	−40 to +85°C	SOL16	TD62503FG
TBD62083APG *	Sink	8ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	DIP18	TD62083APG, ULN2803APG
TBD62083AFG *	Sink	8ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	SOP18	TD62083AFG, ULN2803AFWG
TBD62083AFNG *	Sink	8ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	SSOP18	TD62083AFNG
TBD62083AFWG *	Sink	8ch	50	0.5	High	2.5 to 25	●	●	−40 to +85°C	SOL18	TD62083AFG, ULN2803AFWG
TBD62183AFNG **	Sink	8ch	50	0.05	High	2.5 to 25	●	●	−40 to +85°C	SSOP18	TD62083AFNG
TBD62183AFWG **	Sink	8ch	50	0.05	High	2.5 to 25	●	●	−40 to +85°C	SOL18	TD62083AFG, ULN2803AFWG
TBD62084APG *	Sink	8ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	DIP18	TD62084APG, ULN2804APG
TBD62084AFG *	Sink	8ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	SOP18	TD62084AFG, ULN2804AFWG
TBD62084AFNG *	Sink	8ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	SSOP18	TD62084AFNG
TBD62084AFWG *	Sink	8ch	50	0.5	High	7.0 to 25	●	●	−40 to +85°C	SOL18	TD62084AFG, ULN2804AFWG
TBD62783APG *	Source	8ch	50	0.5	High	2.0 to 25	●	●	−40 to +85°C	DIP18	TD62783APG
TBD62783AFG *	Source	8ch	50	0.5	High	2.0 to 25	●	●	−40 to +85°C	SOP18	TD62783AFG, TD62783AFWG
TBD62783AFNG *	Source	8ch	50	0.5	High	2.0 to 25	●	●	−40 to +85°C	SSOP18	TD62783AFNG
TBD62783AFWG *	Source	8ch	50	0.5	High	2.0 to 25	●	●	−40 to +85°C	SOL18	TD62783AFG, TD62783AFWG

*: New product / 新製品

** : Under development / 開発中

SEMICONDUCTOR GENERAL CATALOG

東芝半導体製品総覧表

RESTRICTIONS ON PRODUCT USE

- ▶ Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
 - ▶ This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
 - ▶ Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
 - ▶ **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
 - ▶ Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
 - ▶ Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
 - ▶ The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
 - ▶ **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NON-INFRINGEMENT.**
 - ▶ Product may include products using GaAs (Gallium Arsenide). GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
 - ▶ Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
 - ▶ Product may include products subject to foreign exchange and foreign trade control laws.
 - ▶ Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**
- In addition to the above, the following are applicable only to development tools.
- ▶ Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Use the Product in a way which minimizes risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. For using the Product, customers must also refer to and comply with the latest versions of all relevant TOSHIBA information, including without limitation, this document, the instruction manual, the specifications, the data sheets for Product.
 - ▶ Product is provided solely for the purpose of performing the functional evaluation of a semiconductor product. Please do not use Product for any other purpose, including without limitation, evaluation in high or low temperature or humidity, and verification of reliability.
 - ▶ Do not incorporate Product into your products or system. Products are for your own use and not for sale, lease or other transfer.

TOSHIBA

TOSHIBA CORPORATION Storage & Electronic Devices Solutions Company

株式会社 **東芝** ストレージ&デバイスソリューション社

http://toshiba.semicon-storage.com/

製品取り扱い上のお願い

- ▶ 本資料に掲載されているハードウェア、ソフトウェアおよびシステム(以下、本製品という)に関する情報等、本資料の掲載内容は、技術の進歩などにより予告なしに変更されることがあります。
- ▶ 文書による当社の事前の承諾なしに本資料の転載複製を禁じます。また、文書による当社の事前の承諾を得て本資料を転載複製する場合でも、記載内容に一切変更を加えたり、削除したりしないでください。
- ▶ 当社は品質、信頼性の向上に努めていますが、半導体・ストレージ製品は一般に誤作動または故障する場合があります。本製品をご使用頂く場合は、本製品の誤作動や故障により生命・身体・財産が侵害されることのないように、お客様の責任において、お客様のハードウェア・ソフトウェア・システムに必要な安全設計を行うことをお願いします。なお、設計および使用に際しては、本製品に関する最新の情報(本資料、仕様書、データシート、アプリケーションノート、半導体信頼性ハンドブックなど)および本製品が使用される機器の取扱説明書、操作説明書などをご確認の上、これに従ってください。また、上記資料などに記載の製品データ、図、表などに示す技術的な内容、プログラム、アルゴリズムその他応用回路例などの情報を使用する場合は、お客様の製品単独およびシステム全体で十分に評価し、お客様の責任において適用可否を判断してください。
- ▶ 本製品は、特別に高い品質・信頼性が要求され、またはその故障や誤作動が生命・身体に危害を及ぼす恐れ、膨大な財産損害を引き起こす恐れ、もしくは社会に深刻な影響を及ぼす恐れのある機器(以下"特定用途"という)に使用されることは意図されていませんし、保証もされていません。特定用途には原子力関連機器、航空・宇宙機器、医療機器、車載・輸送機器、列車・船舶機器、交通信号機器、燃焼・爆発制御機器、各種安全関連機器、昇降機器、電力機器、金融関連機器などが含まれますが、本資料に個別に記載する用途は除きます。特定用途に使用された場合には、当社は一切の責任を負いません。なお、詳細は当社営業窓口までお問い合わせください。
- ▶ 本製品を分解、解析、リバーシエンジニアリング、改造、改変、翻案、複製等しないでください。
- ▶ 本製品を、国内外の法令、規則及び命令により、製造、使用、販売を禁止されている製品に使用することはできません。
- ▶ 本資料に掲載してある技術情報は、製品の代表的動作・応用を説明するためのもので、その使用に際して当社及び第三者の知的財産権その他の権利に対する保証または実施権の許諾を行うものではありません。
- ▶ 別途、書面による契約またはお客様と当社が合意した仕様書がない限り、当社は、本製品および技術情報に関して、明示的にも黙示的にも一切の保証(機能動作の保証、商品性の保証、特定目的への合致の保証、情報の正確性の保証、第三者の権利の非侵害保証を含むがこれに限らない。)をしておりません。
- ▶ 本製品にはGaAs(ガリウムヒ素)が使われているものがあります。その粉末や蒸気等は人体に対し有害ですので、破壊、切断、粉砕や化学的な分解はしないでください。
- ▶ 本製品、または本資料に掲載されている技術情報を、大量破壊兵器の開発等の目的、軍事利用の目的、あるいはその他軍事用途の目的で使用しないでください。また、輸出に際しては、「外国為替及び外国貿易法」、「米国輸出管理規則」等、適用ある輸出関連法令を遵守し、それらの定めるところにより必要な手続を行ってください。
- ▶ 本製品には、外国為替及び外国貿易法により、輸出または海外への提供が規制されているものがあります。
- ▶ 本製品のRoHS適合性など、詳細につきましては製品個別に必ず当社営業窓口までお問い合わせください。本製品のご使用に際しては、特定の物質の含有・使用を規制するRoHS指令等、適用ある環境関連法令を十分調査の上、かかる法令に適合するようご使用ください。お客様がかかる法令を遵守しないことにより生じた損害に関して、当社は一切の責任を負いかねます。

上記に加えて、以下は開発ツールのみに適用されます。

- ▶ 当社は品質、信頼性の向上に努めていますが、本製品は誤作動または故障する場合があります。本製品をご使用頂く場合は、本製品の誤作動や故障により生命・身体・財産が侵害されることのないようにご使用ください。本製品をご使用頂く場合は、本製品に関する最新の情報(本資料、取扱説明書、仕様書、データシートなど)をご確認の上、これに従ってください。
- ▶ 本製品は、半導体製品の機能評価に使用されることを意図しています。機能評価以外の目的(温度・湿度特性評価、信頼性評価など)には使用しないでください。
- ▶ 本製品をお客様の製品に組み込まないでください。また、本製品を販売、譲渡、貸与等しないでください。

【お問い合わせ先】

©2016 TOSHIBA CORPORATION