



Wirewound Resistors, Industrial Power, Tapped Tubular



FEATURES

- Fixed taps for voltage dividers
- High temperature silicon coating
- Complete welded construction
- Excellent stability in operation (< 3 % change in resistance)
- Can be used as multi-tap resistor
- Material categorization:
for definitions of compliance please see www.vishay.com/doc?99912



RoHS* Available

HALOGEN FREE Available

GREEN (5-2008) Available

Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details.

STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING $P_{25\text{ }^\circ\text{C}}$ W | RESISTANCE RANGE TOTAL RESISTANCE WITH ONE TAP Ω | TOLERANCE $\pm \%$ | WEIGHT (typical) g |
|--------------|------------------|---|---|-----------------------|--------------------------|
| HLT015 | HLT-15 | 15 | 0.1 to 18K | 10 | 8.64 |
| HLT020 | HLT-20 | 20 | 0.1 to 31K | 10 | 12.57 |
| HLT025 | HLT-25 | 25 | 0.1 to 34K | 10 | 20.72 |
| HLT026 | HLT-26 | 26 | 0.1 to 59K | 10 | 15.34 |
| HLT050 | HLT-50 | 50 | 0.1 to 104K | 10 | 42.08 |
| HLT051 | HLT-51 | 51 | 0.1 to 112K | 10 | 51.96 |
| HLT055 | HLT-55 | 55 | 0.1 to 49K | 10 | 60.48 |
| HLT060 | HLT-60 | 60 | 0.1 to 136K | 10 | 65.64 |
| HLT065 | HLT-65 | 65 | 0.1 to 159K | 10 | 64.82 |
| HLT070 | HLT-70 | 70 | 0.1 to 72K | 10 | 60.48 |
| HLT080 | HLT-80 | 80 | 0.1 to 164K | 10 | 121.58 |
| HLT095 | HLT-95 | 95 | 0.1 to 96K | 10 | 76.51 |
| HLT100 | HLT-100 | 100 | 0.1 to 253K | 10 | 91.37 |
| HLT120 | HLT-120 | 120 | 0.1 to 305K | 10 | 183.82 |
| HLT130 | HLT-130 | 130 | 0.1 to 358K | 10 | 192.36 |
| HLT160 | HLT-160 | 160 | 0.1 to 446K | 10 | 245.86 |
| HLT175 | HLT-175 | 175 | 0.1 to 481K | 10 | 250.80 |
| HLT225 | HLT-225 | 225 | 0.1 to 622K | 10 | 309.97 |

TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | HLT RESISTOR CHARACTERISTICS |
|---------------------------------|----------|--|
| Temperature Coefficient | ppm/°C | ± 30 for 10 Ω and above; ± 50 for 1.0 Ω to 9.9 Ω ; ± 90 for 0.1 Ω to 0.99 Ω |
| Dielectric Withstanding Voltage | V_{AC} | 1000, from terminal to mounting hardware |
| Short Time Overload | - | 10 x rated power for 5 s |
| Maximum Working Voltage | V | $(P \times R)^{1/2}$ |
| Insulation Resistance | Ω | 1000 M Ω minimum dry, 100 M Ω minimum after moisture test |
| Operating Temperature Range | °C | -55 to +350 |

GLOBAL PART NUMBER INFORMATION

Global Part Numbering example: HLT12007Z150R0KJ



| GLOBAL MODEL | TERMINAL DESIGNATION | TERMINAL FINISH | RESISTANCE VALUE | TOLERANCE | PACKAGING CODE | SPECIAL |
|--|--|---|--|-------------------|--|---|
| HLT120 (see "Standard Electrical Specifications" table above for additional P/N's) | 02 06 07 09 14 15 16 | E = lead (Pb)-free Z = tin / lead N = nickel | R = decimal K = thousand 10R00 = 10.0 Ω 1K000 = 1 k Ω | K = $\pm 10.0 \%$ | E = lead (Pb)-free skin pack J ⁽¹⁾ = skin pack (J01) | (dash number) (up to 2 digits) from 1 to 99 as applicable |


Note
⁽¹⁾ Tin / lead for type "Z", lead (Pb)-free for type "N"

Historical Part Numbering example: HLT-120-07Z 150 Ω 10 % J01

| | | | | |
|------------------|-----------------|------------------|-----------|-----------|
| HLT-120 | 07Z | 150 Ω | 10 % | J01 |
| HISTORICAL MODEL | TERMINAL/FINISH | RESISTANCE VALUE | TOLERANCE | PACKAGING |



DIMENSIONS

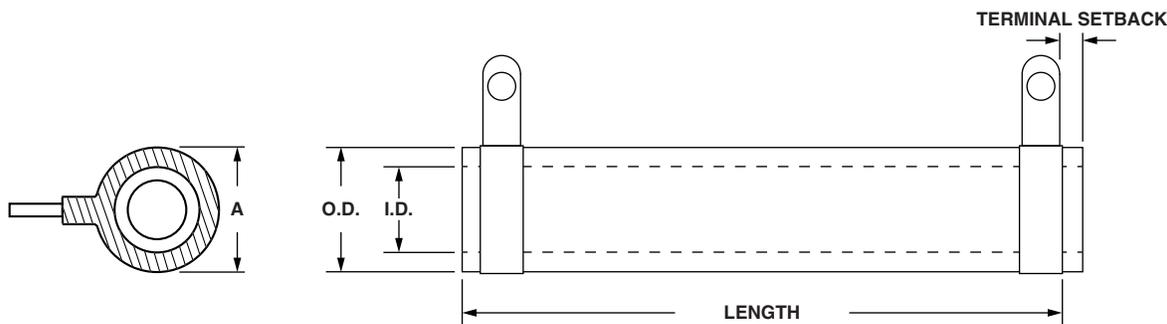

| MODEL | DIMENSIONS in inches [millimeters] | | | | | | | | |
|--------|------------------------------------|-------------------------------|---------------|-----------------------------|--|--|-------------------------|----------|--------------------------------|
| | A (max.) | CORE DIMENSIONS | | | TERMINAL SETBACK ± 0.031 [± 0.79] | DISTANCE BETWEEN TERMINALS (ref.) | TERMINAL DESIGNATION | | BRACKET TYPE ⁽²⁾ |
| | | LENGTH ± 0.062 [± 1.59] | O.D. | I.D. ± 0.031 [± 0.79] | | | STANDARD | OPTIONAL | |
| HLT015 | 0.563 [14.29] | 1.500 [38.10] | 0.438 [11.11] | 0.313 [7.94] | 0.094 [2.38] | 0.937 [23.80] | 02Z | 14N | 101, 203, 301 |
| HLT020 | 0.563 [14.29] | 2.000 [50.80] | 0.438 [11.11] | 0.313 [7.94] | 0.094 [2.38] | 1.437 [36.50] | 02Z | 14N | 101, 203, 301 |
| HLT025 | 0.688 [17.46] | 2.000 [50.80] | 0.563 [14.29] | 0.313 [7.94] | 0.094 [2.38] | 1.312 [33.32] | 06Z | 15N | 101, 203, 301 |
| HLT026 | 0.563 [14.29] | 3.000 [76.20] | 0.438 [11.11] | 0.313 [7.94] | 0.094 [2.38] | 2.437 [61.90] | 02Z | 14N | 101, 203, 301 |
| HLT050 | 0.688 [17.46] | 4.000 [101.60] | 0.563 [14.29] | 0.313 [7.94] | 0.094 [2.38] | 3.312 [84.12] | 06Z | 15N | 101, 203, 301 |
| HLT051 | 0.906 [23.02] | 3.500 [88.90] | 0.750 [19.05] | 0.500 [12.70] | 0.125 [3.18] | 2.75 [69.85] | 06Z | 15N | 102, 206, 303 |
| HLT055 | (1) | 3.500 [88.90] | (1) | (1) | (1) | 2.968 [75.39] | 09Z | 16N | (1) |
| HLT060 | 0.906 [23.02] | 4.000 [101.60] | 0.750 [19.05] | 0.500 [12.70] | 0.125 [3.18] | 3.250 [82.55] | 06Z | 15N | 102, 206, 303 |
| HLT065 | 0.906 [23.02] | 4.500 [114.30] | 0.750 [19.05] | 0.500 [12.70] | 0.125 [3.18] | 3.750 [95.25] | 06Z | 15N | 102, 206, 303 |
| HLT070 | (1) | 4.750 [120.65] | (1) | (1) | (1) | 4.218 [107.14] | 09Z | 16N | (1) |
| HLT080 | 1.313 [33.34] | 4.000 [101.60] | 1.125 [28.58] | 0.750 [19.05] | 0.219 [5.56] | 2.812 [71.42] | 07Z | 15N | 103, 205, 303 |
| HLT095 | (1) | 6.000 [152.40] | (1) | (1) | (1) | 5.468 [138.89] | 09Z | 16N | (1) |
| HLT100 | 0.906 [23.02] | 6.500 [165.10] | 0.750 [19.05] | 0.500 [12.70] | 0.125 [3.18] | 5.750 [146.05] | 06Z | 15N | 102, 206, 303 |
| HLT120 | 1.313 [33.34] | 6.000 [152.40] | 1.125 [28.58] | 0.750 [19.05] | 0.219 [5.56] | 4.812 [122.23] | 07Z | 15N | 103, 205, 303 |
| HLT130 | 1.313 [33.34] | 6.500 [165.10] | 1.125 [28.58] | 0.750 [19.05] | 0.219 [5.56] | 5.312 [134.93] | 07Z | 15N | 103, 205, 303 |
| HLT160 | 1.313 [33.34] | 8.000 [203.20] | 1.125 [28.58] | 0.750 [19.05] | 0.219 [5.56] | 6.812 [173.03] | 07Z | 15N | 103, 205, 303 |
| HLT175 | 1.313 [33.34] | 8.500 [215.90] | 1.125 [28.58] | 0.750 [19.05] | 0.219 [5.56] | 7.312 [185.73] | 07Z | 15N | 103, 205, 303 |
| HLT225 | 1.313 [33.34] | 10.500 [266.70] | 1.125 [28.58] | 0.750 [19.05] | 0.219 [5.56] | 9.312 [236.53] | 07Z | 15N | 103, 205, 303 |

Notes

- (1) HLT055, HLT070, and HLT095 are HL Flat style, see HL Flat datasheet for detail dimensions.
- (2) Brackets are available for mounting HLT series resistors - see Mounting Hardware section below.

TERMINAL DIMENSIONS



| DIMENSION | TERMINAL STYLE | | | | | | |
|-----------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | 02 | 06 | 07 | 09 | 14 | 15 | 16 |
| A | 0.188 [4.76] | 0.250 [6.35] | 0.375 [9.53] | 0.188 [4.76] | 0.188 [4.76] | 0.250 [6.35] | 0.188 [4.76] |
| B | 0.406 [10.32] | 0.563 [14.29] | 0.625 [15.88] | 0.500 [12.70] | 0.563 [14.29] | 0.594 [15.08] | 0.563 [14.29] |
| C | 0.093 [2.36] | 0.166 [4.22] | 0.173 [4.39] | 0.104 [2.64] | 0.050 [1.27] | 0.065 [1.65] | 0.050 [1.27] |
| D | 0.020 [0.51] | 0.020 [0.51] | 0.020 [0.51] | 0.020 [0.51] | 0.020 [0.51] | 0.031 [0.79] | 0.020 [0.51] |

MOUNTING HARDWARE

Mounting hardware is available for HLT resistors, see "HL Brackets and Sliders" datasheet for more information (www.vishay.com/doc?30279).

MATERIAL SPECIFICATIONS

Element: copper-nickel alloy or nickel-chrome alloy, depending on resistance value

Core: ceramic, steatite

Coating: special high temperature silicone

Standard Terminals: model "E" terminals are tinned steel


Terminal Bands: steel

Part Marking: Dale, model, wattage, value, tolerance, date code

TERMINAL FINISH

"E" Finish - 100 % Sn coated steel. "Z" Finish - 60/40 Sn/Pb coated steel. "N" Finish - Nickel coated steel. Finish for terminal style 14 and 15 is limited to nickel plated steel (N).

DERATING

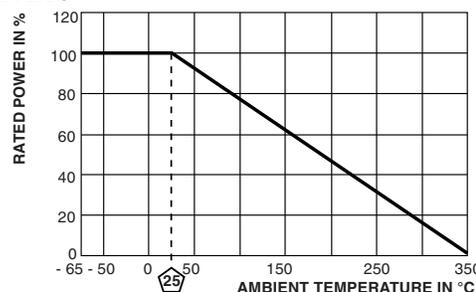



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.