



VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HERewith IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
01	DRN- E990450 RCM	3/9/00	DPK

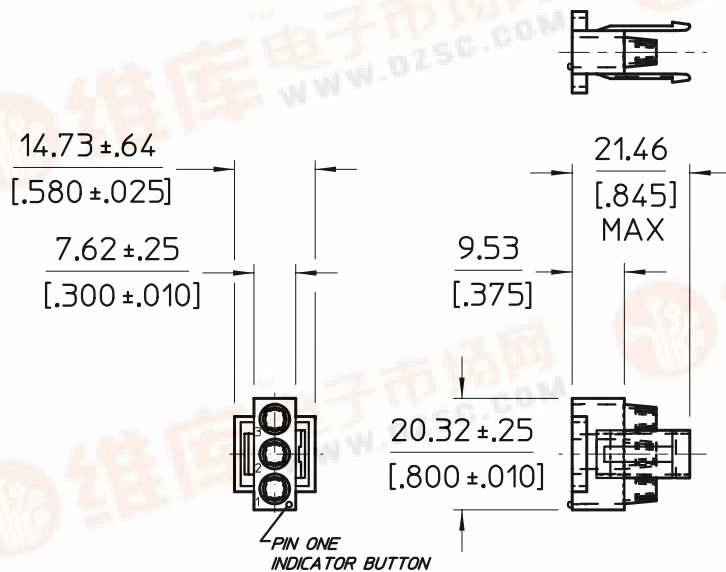

CONN HOUSING PLUG- REAR

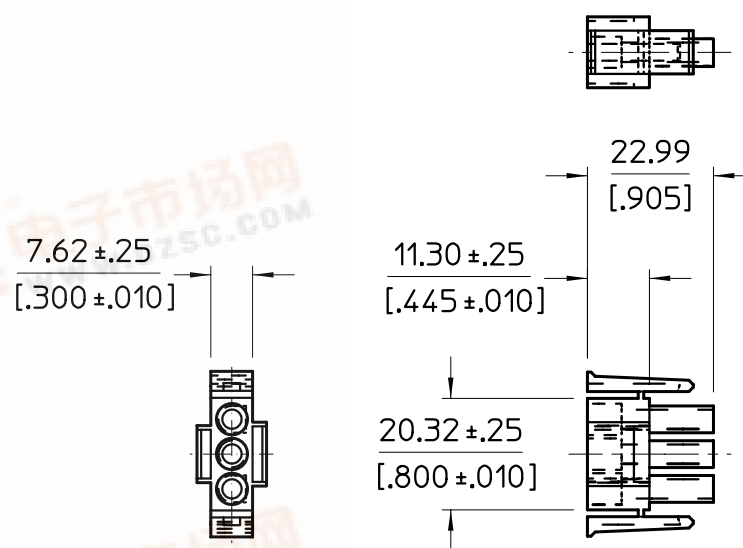

CONN HOUSING PLUG- FRONT

FEATURES:

Product Type: Housing
Connector Line: Universal MATE-N-LOK II.
Contact Diameter (mm [in]): 2.13 [.084]
Centerline (mm [in]): 6.35 [.250]
No. of Circuits: 3
Contact Layout: In-Line
Housing type: Plug
Mount: Free Hanging
Packaging Method: Front & Rear Component
Housing Material: Nylon
Color: White
Lock Type: Positive Lock
High Current: No

OTHER PROPERTIES:

Packaging Quantity: 250
Voltage: 600 Volts
Current Rating: 19 Amps Max
Housing Flammability Rating: UL 94V-0
Sealable: No
Industry Application: Standard

DRAWN BY RCM	DATE 3/9/00				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM/[INCHES] TOLERANCES ARE: DECIMALS ANGLES .XXX= ± 0.13/[.005]					
THIRD ANGLE PROJECTION 		SIZE B	FSCM NO. 67131	DWG NO 20687	REV 01
DO NOT SCALE DRAWING		SCALE FULL		SHEET 1 OF 1	