



VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
01	DRN- E990450 RCM	3/9/00	DPK

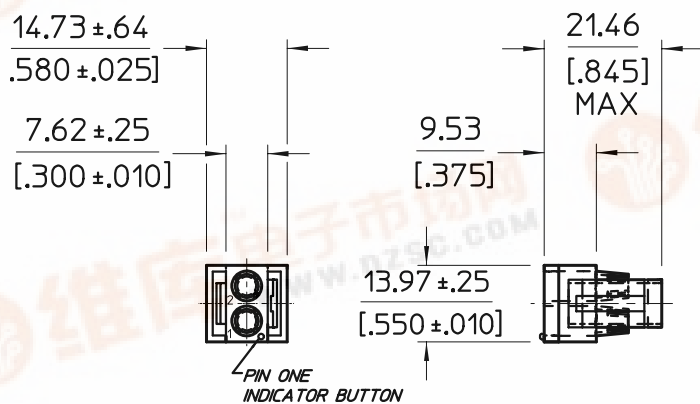

CONN HOUSING PLUG- REAR

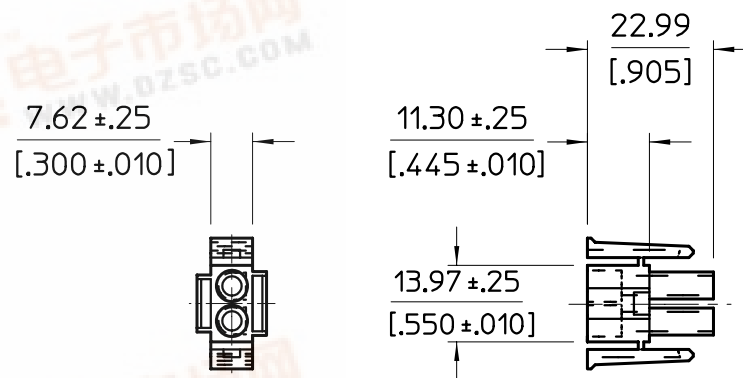

CONN HOUSING PLUG- FRONT

FEATURES:

Product Type: Housing
 Connector Line: Universal MATE-N-LOK II.
 Contact Diameter (mm [in]): 2.13 [.084]
 Centerline (mm [in]): 6.35 [.250]
 No. of Circuits: 2
 Contact Layout: In-Line
 Housing type: Plug
 Mount: Free Hanging
 Packaging Method: Front & Rear Component
 Housing Material: Nylon
 Color: White
 Lock Type: Positive Lock
 High Current: No

OTHER PROPERTIES:

Packaging Quantity: 250
 Voltage: 600 Volts
 Current Rating: 19 Amps Max
 Housing Flammability Rating: UL 94V-0
 Sealable: No
 Industry Application: Standard

DRAWN BY <i>RCM</i>	DATE <i>3/9/00</i>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM/[INCHES] TOLERANCES ARE: DECIMALS ANGLES .XXX = ± 0.13/[.005] _____		CONNECTOR HSG, 2 PIN, 19A, 600V UNIVERSAL PLUG				
THIRD ANGLE PROJECTION 	SIZE B	FSCM NO. 67131	DWG NO 20688	REV 01		
DO NOT SCALE DRAWING	SCALE FULL			SHEET 1 OF 1		

**CONNECTOR HSC, 2 PIN, 19A, 600V
 UNIVERSAL PLUG**