



289 SERIES LINE ISOLATION STEP DOWN - PLUG IN (230V to 115V)

- Primary 230VAC, 50/60 Hz., Secondary 115VAC.
- Provides circuit isolation.
- Electrostatic shield between primary & secondary.
- World wide applications, 50 or 60 Hz. operation, step down (230VAC to 115 VAC).
- Standard 3-wire, grounded plug (for use only with adaptors listed on page 58 for proper grounding).
- Secondary connected to two standard - 3 wire grounded receptacles.
- Features include ventilated black steel case, rocker lighted on-off switch & fuse protected output.
- 5 foot "U ground" cord & plug.

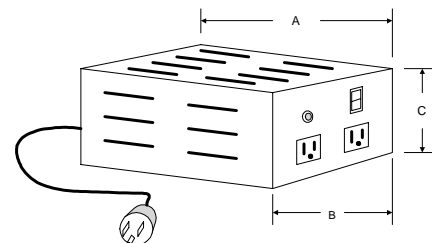

Cat. No.	Capacity VA	# of Outlets	Dimensions		
			A	B	C
289C	250	2	6.00	6.75	4.75
289D	500	2	6.00	8.25	4.75
289E	750	2	7.00	8.25	5.38
289F	1000	2	7.00	9.75	5.38
289G	1500	2	8.50	9.00	6.75


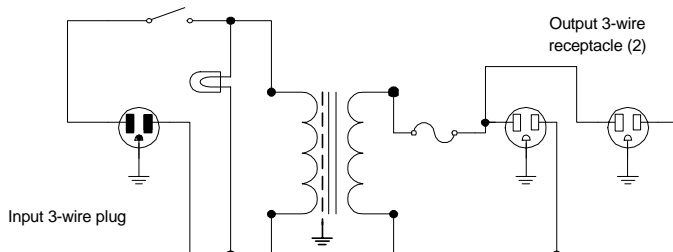


298 SERIES LINE ISOLATION STEP UP - PLUG IN (115V to 230V)

- Primary 115VAC, 50/60 Hz., Secondary 230VAC.
- Provides circuit isolation.
- Electrostatic shield between primary & secondary.
- World wide applications, 50 or 60 Hz. operation, step up (115VAC to 230 VAC).
- Standard 3-wire, grounded plug (for use only with adaptors listed on page 58 for proper grounding).
- Secondary connected to two European - 3 wire grounded receptacles.
- Features include ventilated black steel case, rocker lighted on-off switch & fuse protected output.
- 5 foot "U ground" cord & plug.



Cat. No.	Capacity VA	# of Outlets	Dimensions		
			A	B	C
298C	250	2	6.00	6.75	4.75
298D	500	2	6.00	8.25	4.75
298E	750	2	7.00	8.25	5.38
298F	1000	2	7.00	9.75	5.38
298G	1500	2	8.50	9.00	6.75

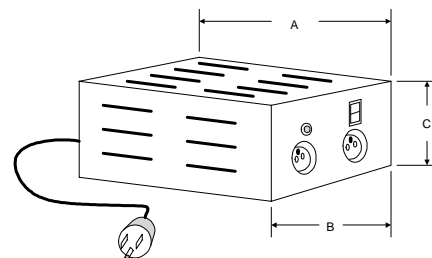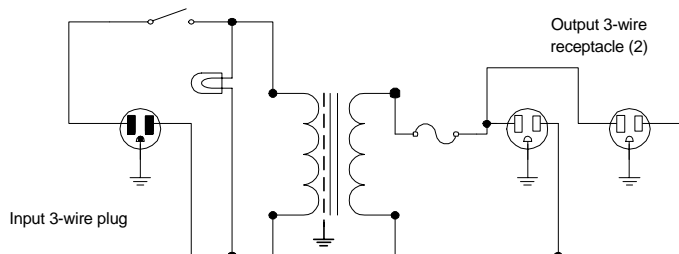

Line

CANADA

Phone: (519) 822-2960 Fax: (519) 822-0715

USA

Phone: (716) 651-0086 Fax: (716) 651-0726



© 2000

**HAMMOND
MANUFACTURING™**
www.hammondmfg.com