


Series 299

Dual-in-line sockets / right angle version
Closed frame
Solder tail


75

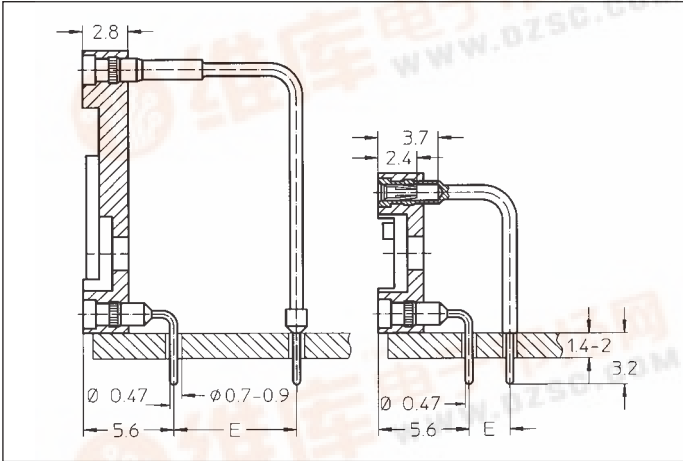

Series 299 Dip sockets with closed frame insulator are designed for components to be mounted perpendicularly to the PCB, such as LED displays

Right angle solder-tails are available with either 7.62 mm (standard) or 2.54 mm row spacing

Insertion characteristics:
4-finger standard

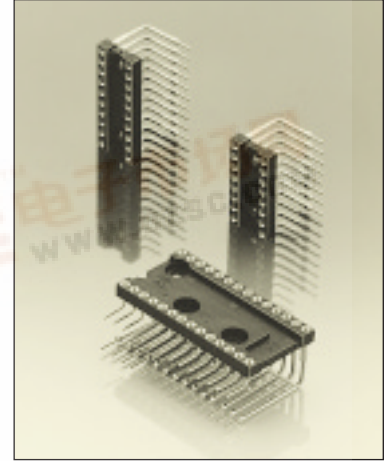

Platings	Sleeve 	Clip 	Pin 
93 91	5 µm Sn Pb 5 µm Sn Pb	0.75 µm Au 0.25 µm Au	

Ordering information

For complete part number see Order Codes list below

No. of poles	Order Codes					Insulator dimensions			
	Plating 93 B	Plating 93 B	Plating 91 B	Plating 91 B		See page 51	A	B	C
	E = 7.62	E = 2.54	E = 7.62	E = 2.54					
6	299-93-306-10-001	299-93-306-11-001	299-91-306-10-001	299-91-306-11-001			7.6	7.62	10.1
8	299-93-308-10-001	299-93-308-11-001	299-91-308-10-001	299-91-308-11-001			10.1	7.62	10.1
10	299-93-310-10-001	299-93-310-11-001	299-91-310-10-001	299-91-310-11-001			12.6	7.62	10.1
12	299-93-312-10-001	299-93-312-11-001	299-91-312-10-001	299-91-312-11-001			15.2	7.62	10.1
14	299-93-314-10-001	299-93-314-11-001	299-91-314-10-001	299-91-314-11-001			17.7	7.62	10.1
16	299-93-316-10-001	299-93-316-11-001	299-91-316-10-001	299-91-316-11-001			20.3	7.62	10.1
18	299-93-318-10-001	299-93-318-11-001	299-91-318-10-001	299-91-318-11-001			22.8	7.62	10.1
20	299-93-320-10-001	299-93-320-11-001	299-91-320-10-001	299-91-320-11-001			25.3	7.62	10.1
24	299-93-324-10-001	299-93-324-11-001	299-91-324-10-001	299-91-324-11-001			30.4	7.62	10.1
8	299-93-608-10-002		299-91-608-10-002				10.1	15.24	17.7
10	299-93-610-10-002		299-91-610-10-002				12.6	15.24	17.7
12	299-93-612-10-002		299-91-612-10-002				15.2	15.24	17.7
14	299-93-614-10-002		299-91-614-10-002				17.7	15.24	17.7
16	299-93-616-10-002		299-91-616-10-002				20.1	15.24	17.7
18	299-93-618-10-002		299-91-618-10-002				22.8	15.24	17.7
20	299-93-620-10-002		299-91-620-10-002				25.3	15.24	17.7
22	299-93-622-10-002		299-91-622-10-002				27.8	15.24	17.7
24	299-93-624-10-002		299-91-624-10-002				30.4	15.24	17.7
26	299-93-626-10-002		299-91-626-10-002				33.0	15.24	17.7
28	299-93-628-10-002		299-91-628-10-002				35.5	15.24	17.7
30	299-93-630-10-002		299-91-630-10-002				38.0	15.24	17.7
32	299-93-632-10-002		299-91-632-10-002				40.6	15.24	17.7
36	299-93-636-10-002		299-91-636-10-002				45.7	15.24	17.7
40	299-93-640-10-002		299-91-640-10-002				50.6	15.24	17.7