

2N1893

Features

- Meets MIL-S-19500/182
- Collector-Base Voltage 120
- Collector Current: 0.5 mA
- Fast Switching 30 nS


120 Volts
0.5 Amps

NPN
BIPOLAR
TRANSISTOR

Maximum Ratings

RATING	SYMBOL	MAX.	UNIT
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Collector-Base Voltage	V_{CBO}	120	Vdc
Emitter-Base Voltage	V_{EBO}	7.0	Vdc
Collector Current - Continuous	I_C	0.5	Adc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	0.8 4.57	Watt mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	3.0 17.2	Watts mW/ $^\circ\text{C}$
Operating Temperature Range	T_J	-55 to +200	$^\circ\text{C}$
Storage Temperature Range	T_S	-55 to +200	$^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	219	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JA}$	58	$^\circ\text{C/W}$

Mechanical Outline

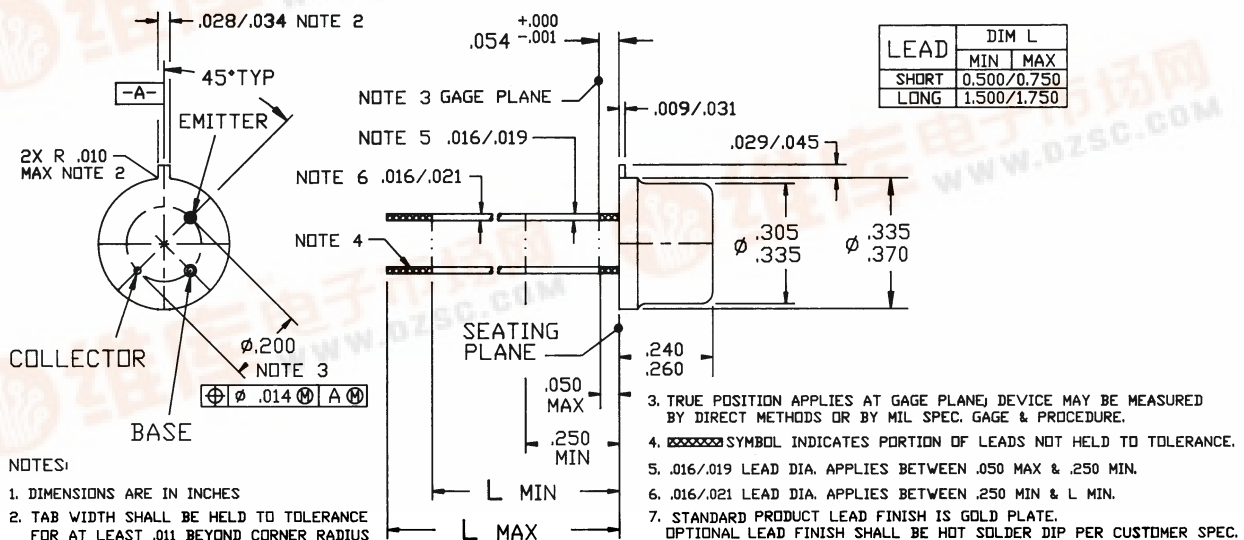

FOR SHORT LEAD ADD SUFFIX "S"
ie: 2N1893S

2N1893

Electrical Parameters (T_A @ 25°C unless otherwise specified)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Off Characteristics					
Collector-Emitter Breakdown Voltage (I _C = 100 mAdc, R _{BE} = 10 ohms)(1)	BV_{CER}	100		--	Vdc
Collector-Emitter Sustaining Voltage(1) (I _C = 30 mAdc, I _B = 0)(1)	BV_{CEO}	80		--	Vdc
Collector-Base Breakdown Voltage (I _C = 100 μAdc, I _E = 0)	BV_{(BR)CBO}	120		--	Vdc
Emitter-Base Breakdown Voltage (I _E = 100 μAdc, I _C = 0)	BV_{(BR)EBO}	7.0		--	Vdc
Collector Cutoff Current (V _{CB} = 90 Vdc, I _E = 0) (V _{CB} = 90 Vdc, I _E = 0, T _A = 150°C)	IC_{BO}	--		0.01 15	μAdc
Emitter Cutoff Current (V _{EB} = 5.0 Vdc, I _C = 0)	IE_{BO}	--		0.01	μAdc
On Characteristics					
D.C. Current Gain (I _C = 0.1 mAdc, V _{CE} = 10 Vdc) (I _C = 10mAdc, V _{CE} = 10 Vdc)(1) (I _C = 10mAdc, V _{CE} = 10 Vdc, T _A = -55°C)(1) (I _C = 150mAdc, V _{CE} = 10 Vdc)(1)	h_{FE}	20 35 20 40		-- -- -- 120	--
Collector-Emitter Saturation Voltage(1) (I _C = 150 mAdc, I _B = 15 mAdc)	V_{CE(Sat)}	--		0.5	Vdc
Base-Emitter Saturation Voltage(1) (I _C = 150 mAdc, I _B = 15 mAdc)	V_{BE(Sat)}	--		1.3	Vdc
Magnitude of small signal short-circuit forward current ratio (I _C = 50 mAdc, V _{CE} = 10 Vdc, f = 20 MHz)	/h_{fe}/	3		10	
Output Capacitance (V _{CB} = 10 Vdc, I _E = 0, f = 1.0 MHz)	C_{OBO}	5		15	pF
Input Impedance = (I _C = 5.0 mAdc, V _{CB} = 10 Vdc, f = 1.0kHz)	h_{ib}	4.0		8.0	Ohms
Voltage Feedback Ratio (I _C = 5.0 mAdc, V _{CB} = 10 Vdc, f = 1.0 kHz)	h_{rb}	--		1.5	X 10 ⁻⁴
Small-Signal Current Gain (I _C = 1.0 mAdc, V _{CB} = 5.0Vdc, f = 1.0 kHz) (I _C = 5.0 mAdc, V _{CB} = 10 Vdc, f = 1.0 kHz)	h_{fe}	35 45		100 --	--
Output Admittance (I _C = 5.0 mAdc, V _{CB} = 10 Vdc, f = 1.0 kHz)	h_{ob}	--		0.5	μmho
Pulse response (V _{cc} = 20Vdc, I _C = 500mAdc)	t_{on} + t_{off}	--		30	ns

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.