



N-Channel JFETs

PRODUCT SUMMARY

Part Number	$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	I_{DSS} Min (mA)	$r_{DS(on)}$ Max (Ω)	$I_{D(off)}$ Typ (pA)	t_{ON} Typ (ns)
2N4856A	-4 to -10	-40	50	25	5	4
2N4857A	-2 to -6	-40	20	40	5	4
2N4858A	-0.8 to -4	-40	8	60	5	4

FEATURES

- Low On-Resistance: 2N4856A <25 Ω
- Fast Switching— t_{ON} : 4 ns
- High Off-Isolation— $I_{D(off)}$: 5 pA
- Low Capacitance: 3 pF
- Low Insertion Loss

BENEFITS

- Low Error Voltage
- High-Speed Analog Circuit Performance
- Negligible "Off-Error," Excellent Accuracy
- Good Frequency Response
- Eliminates Additional Buffering

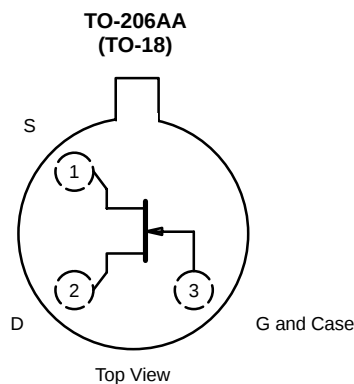
APPLICATIONS

- Analog Switches
- Choppers
- Sample-and-Hold
- Normally "On" Switches
- Current Limiters

DESCRIPTION

The 2N4856A/4857A/4858A all-purpose JFET analog switches offer low on-resistance, low capacitance, good isolation, and fast switching.

Hermetically-sealed TO-206AA (TO-18) packaging allows full military processing (see Military Information). For similar products in TO-226AA (TO-92) and SOT-23 packages, see the J/SST111 series data sheet. For similar duals, see the 2N5564/5565/5566 data sheet.



ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage : (2N4856A-58A) -40 V
 Gate Current 50 mA
 Lead Temperature ($1/16$ " from case for 10 seconds) 300 °C
 Storage Temperature -65 to 200 °C

Operating Junction Temperature -55 to 200 °C
 Power Dissipation^a 1.8 W

Notes

a. Derate 10 mW/°C for $T_J > 25$ °C







SPECIFICATIONS ($T_A = 25$ °C UNLESS OTHERWISE NOTED)







Parameter	Symbol	Test Conditions	Typ ^a	Limits						Unit
				2N4856A		2N4857A		2N4858A		
				Min	Max	Min	Max	Min	Max	
Static										
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = −1 μA , V _{DS} = 0 V	−55	−40		−40		−40		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 15 V, I _D = 0.5 nA		−4	−10	−2	−6	−0.8	−4	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 15 V, V _{GS} = 0 V		50		20	100	8	80	mA
Gate Reverse Current	I _{GSS}	V _{GS} = −20 V, V _{DS} = 0 V	−5		−250		−250		−250	pA
		T _A = 150°C	−13		−500		−500		−500	nA
Gate Operating Current ^c	I _G	V _{DG} = 15 V, I _D = 10 mA	−5							pA
Drain Cutoff Current	I _{D(off)}	V _{DS} = 15 V, V _{GS} = −10 V	5		250		250		250	
		T _A = 150°C	13		500		500		500	nA
Drain-Source On-Voltage	V _{DS(on)}	V _{GS} = 0 V	I _D = 5 mA	0.25					0.5	V
			I _D = 10 mA	0.35			0.5			
			I _D = 20 mA	0.5		0.75				
Drain-Source On-Resistance ^c	r _{DS(on)}	V _{GS} = 0 V, I _D = 1 mA			25		40		60	Ω
Gate-Source Forward Voltage ^c	V _{GS(F)}	I _G = 1 mA , V _{DS} = 0 V	0.7							V
Dynamic										
Common-Source Forward Transconductance ^c	g _{fs}	V _{DS} = 20 V, I _D = 1 mA f = 1 kHz	6							mS
Common-Source Output Conductance ^c	g _{os}		25							μS
Drain-Source On-Resistance	r _{ds(on)}	V _{GS} = 0 V, I _D = 0 mA f = 1 kHz			25		40		60	Ω
Common-Source Input Capacitance	C _{iss}	V _{DS} = 0 V, V _{GS} = −10 V f = 1 MHz	7		10		10		10	pF
Common-Source Reverse Transfer Capacitance	C _{rss}		3		4		3.5		3.5	
Equivalent Input Noise Voltage ^c	e _n	V _{DS} = 10 V, I _D = 10 mA f = 1 kHz	3							nV/ √Hz
Switching										
Turn-On Time	t _{d(on)}	V _{DD} = 10 V, V _{GSH} = 0 V See Switching Circuit	2		5		6		8	ns
	t _r		2		3		4		8	
Turn-Off Time	t _{OFF}		12		20		40		80	

Notes

- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
 b. Pulse test: $PW \leq 100 \mu s$ duty cycle $\leq 10\%$.
 c. This parameter not registered with JEDEC.

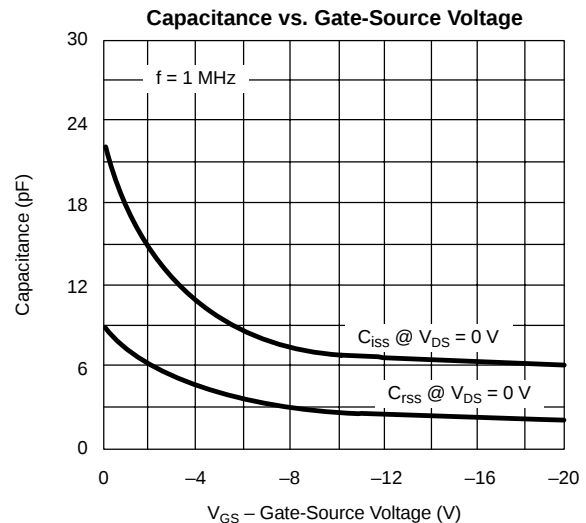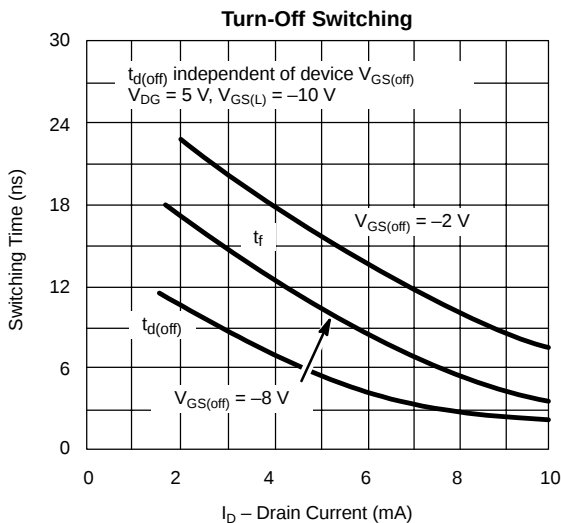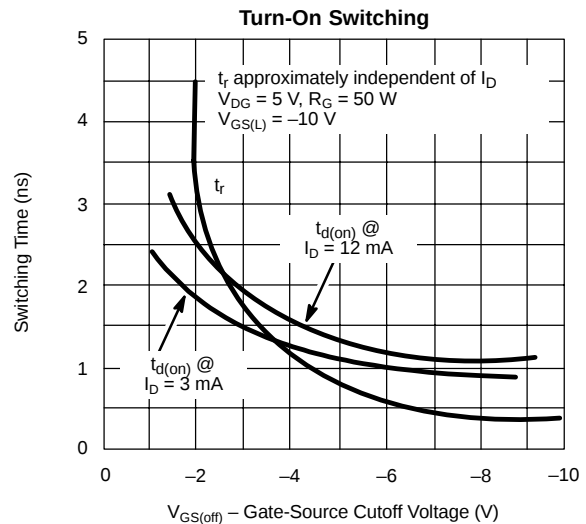
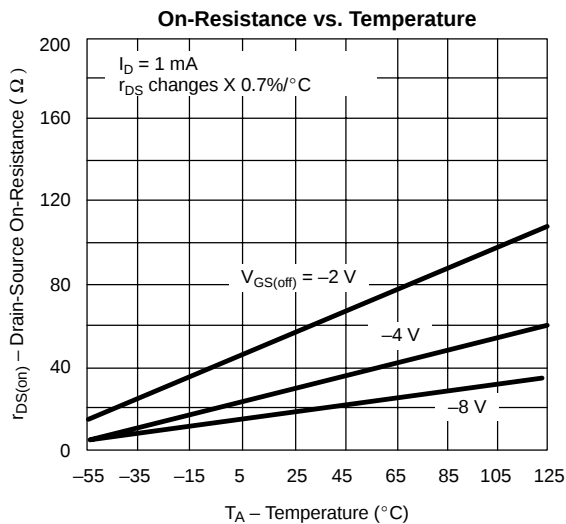
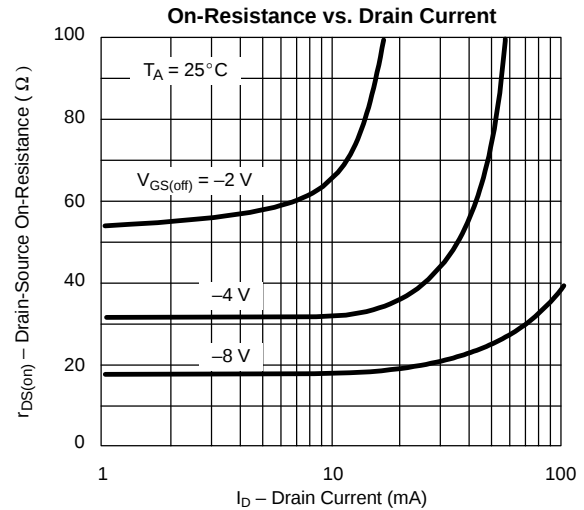
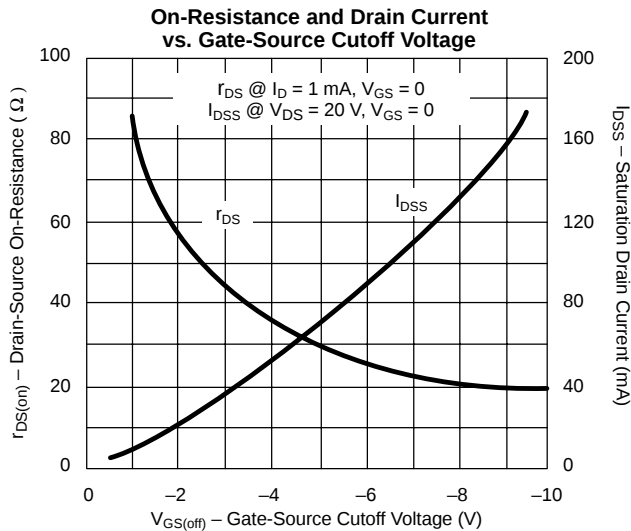
NCB

**TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)**

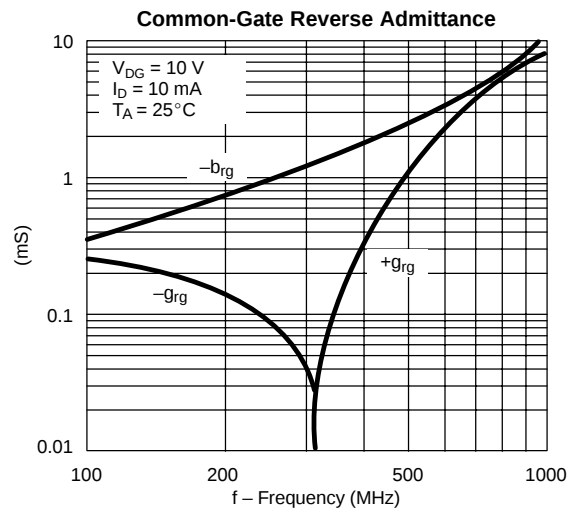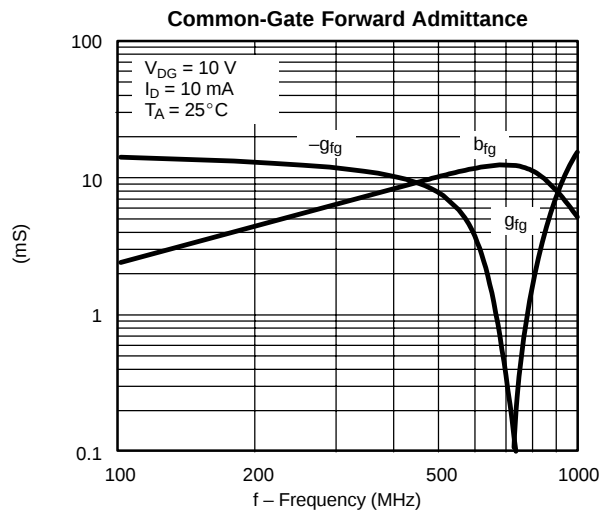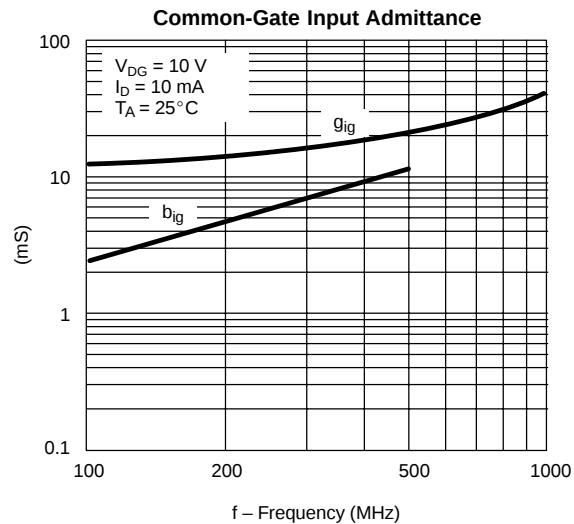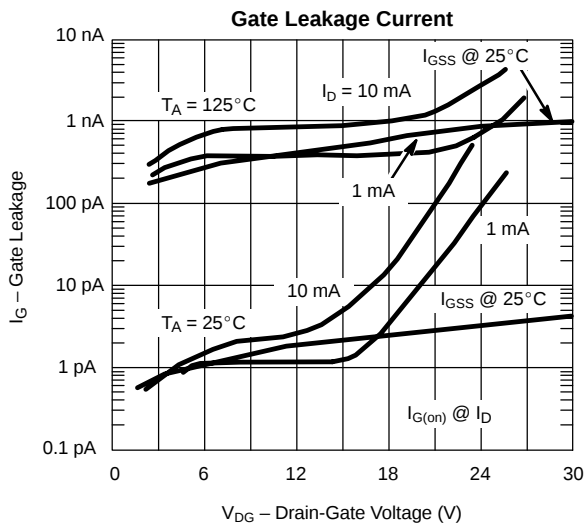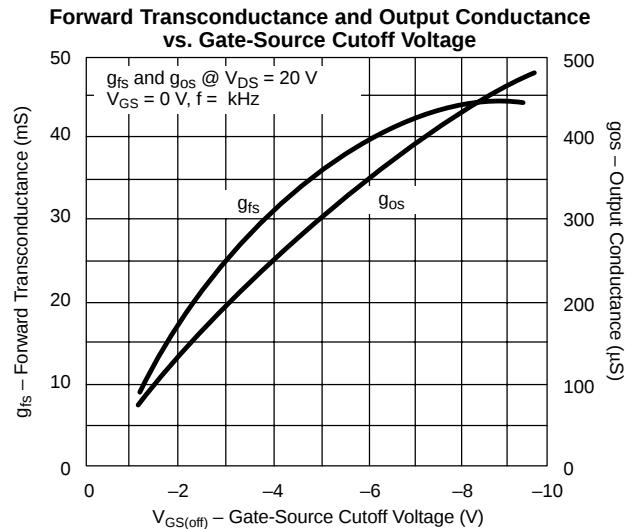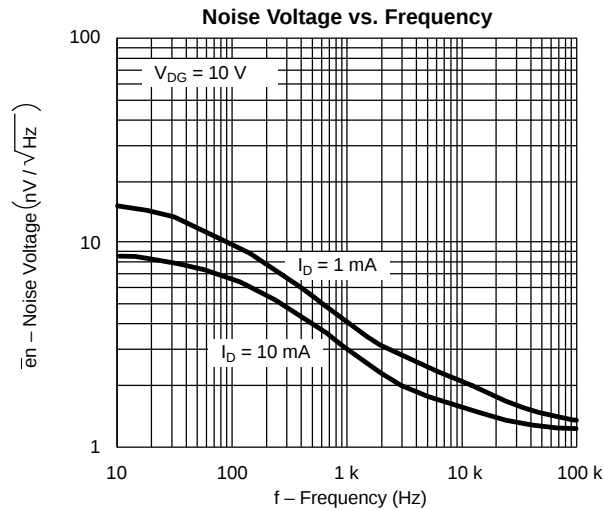TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)



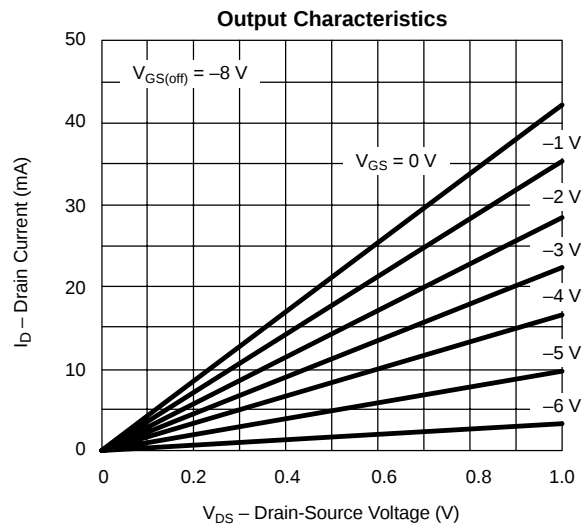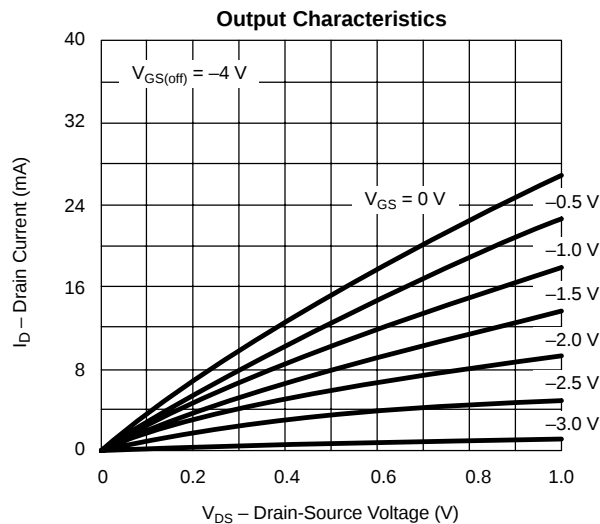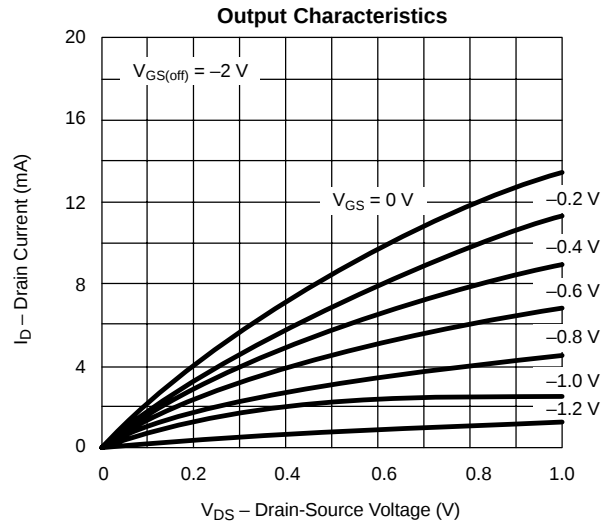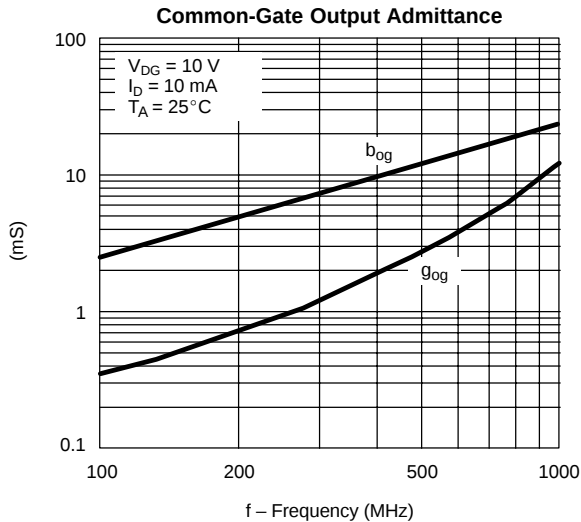
TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)



SWITCHING TIME TEST CIRCUIT

	2N4856A	2N4857A	2N4858A
$V_{GS(L)}$	-10 V	-6 V	-4 V
R_L^*	464 Ω	953 Ω	1910 Ω
$I_{D(on)}$	20 mA	10 mA	5 mA

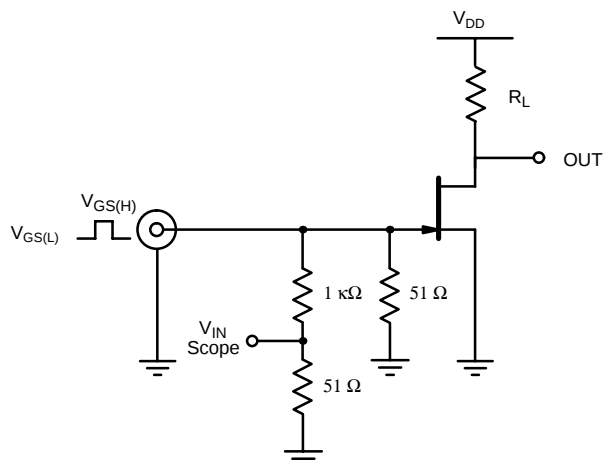
*Non-inductive

INPUT PULSE

Rise Time < 1 ns
 Fall Time < 1 ns
 Pulse Width 100 ns
 PRF 1 MHz

SAMPLING SCOPE

Rise Time 0.4 ns
 Input Resistance 10 M Ω
 Input Capacitance 1.5 pF





Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.