


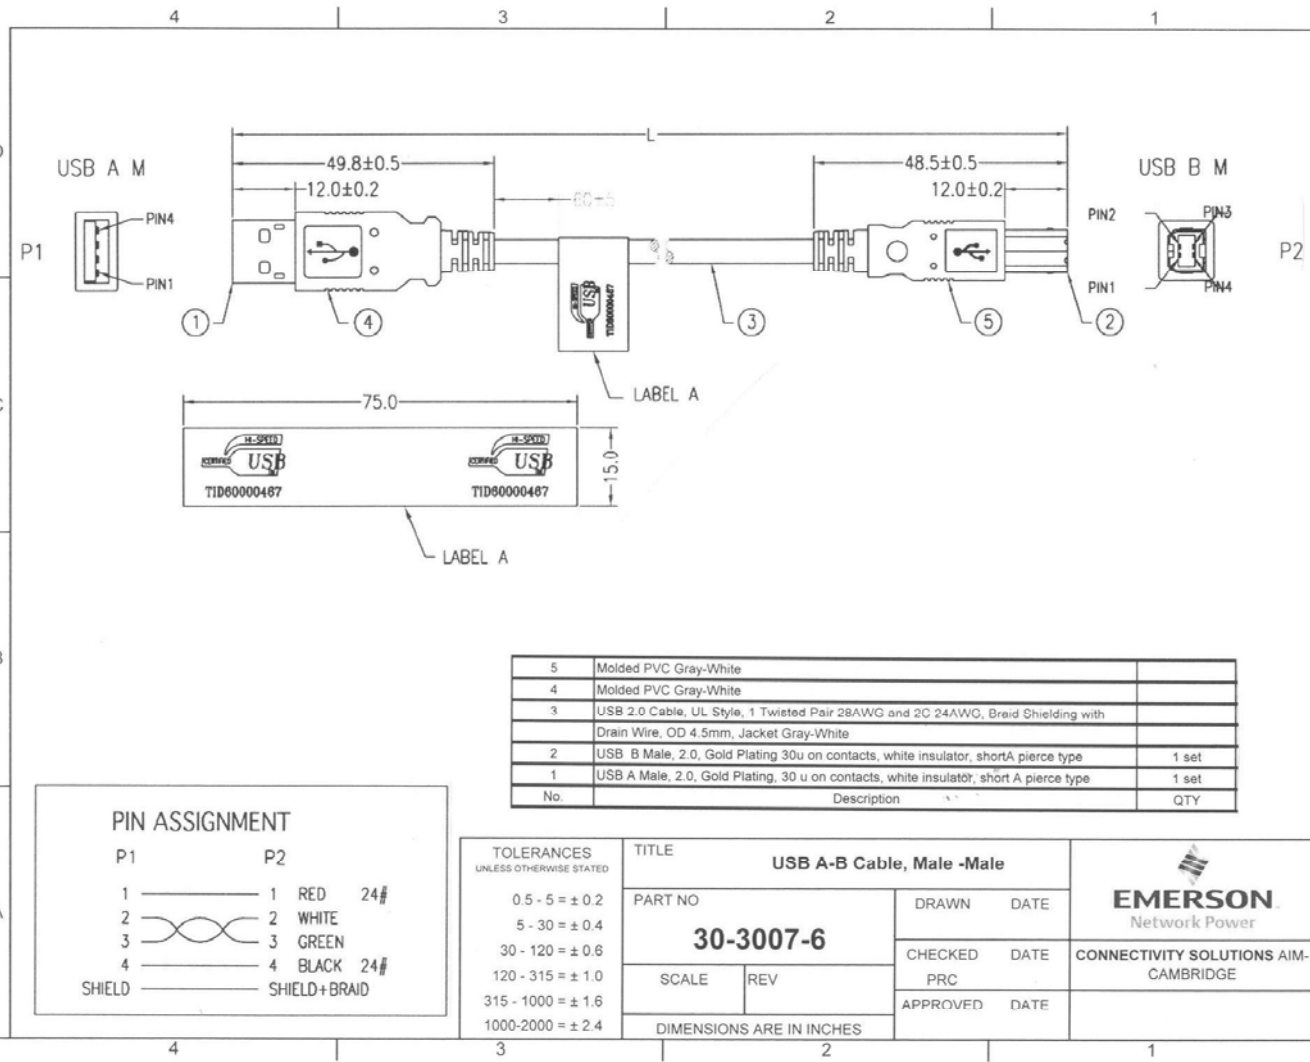

PIN ASSIGNMENT			
P1		P2	
1	—	1	RED 24#
2	—	2	WHITE
3	—	3	GREEN
4	—	4	BLACK 24#
SHIELD	—		SHIELD+BRAID

5	Molded PVC Gray-White	
4	Molded PVC Gray-White	
3	USB 2.0 Cable, UL Style, 1 Twisted Pair 28AWG and 2C 24AWG, Braid Shielding with Drain Wire, OD 4.5mm, Jacket Gray-White	
2	USB B Male, 2.0, Gold Plating 30u on contacts, white insulator, short A pierce type	1 set
1	USB A Male, 2.0, Gold Plating, 30 u on contacts, white insulator, short A pierce type	1 set
No.	Description	QTY

TOLERANCES UNLESS OTHERWISE STATED	TITLE USB A-B Cable, Male -Male			 EMERSON Network Power
	PART NO 30-3007-6		DRAWN DATE	
			CHECKED DATE	CONNECTIVITY SOLUTIONS AIM- CAMBRIDGE
	SCALE	REV	PRC	
			APPROVED DATE	
	DIMENSIONS ARE IN INCHES			
0.5 - 5 = ± 0.2				
5 - 30 = ± 0.4				
30 - 120 = ± 0.6				
120 - 315 = ± 1.0				
315 - 1000 = ± 1.6				
1000-2000 = ± 2.4				