


4
DRAWING MADE IN THIRD ANGLE PROJECTION
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS			
				ZONE	LTR	DESCRIPTION	DATE
G	14				F	REV / 0720-0363-94	3/14/94
							APPO
							NE

AMP WIRE RANGE	 Listed	 LR7189 Certified
16-14HD AWG SOLID OR STRANDED	16-14HD AWG SOLID OR STRANDED	16-14HD AWG SOLID OR STRANDED

METRIC
DIMENSIONS LISTED IN mm [INCHES]

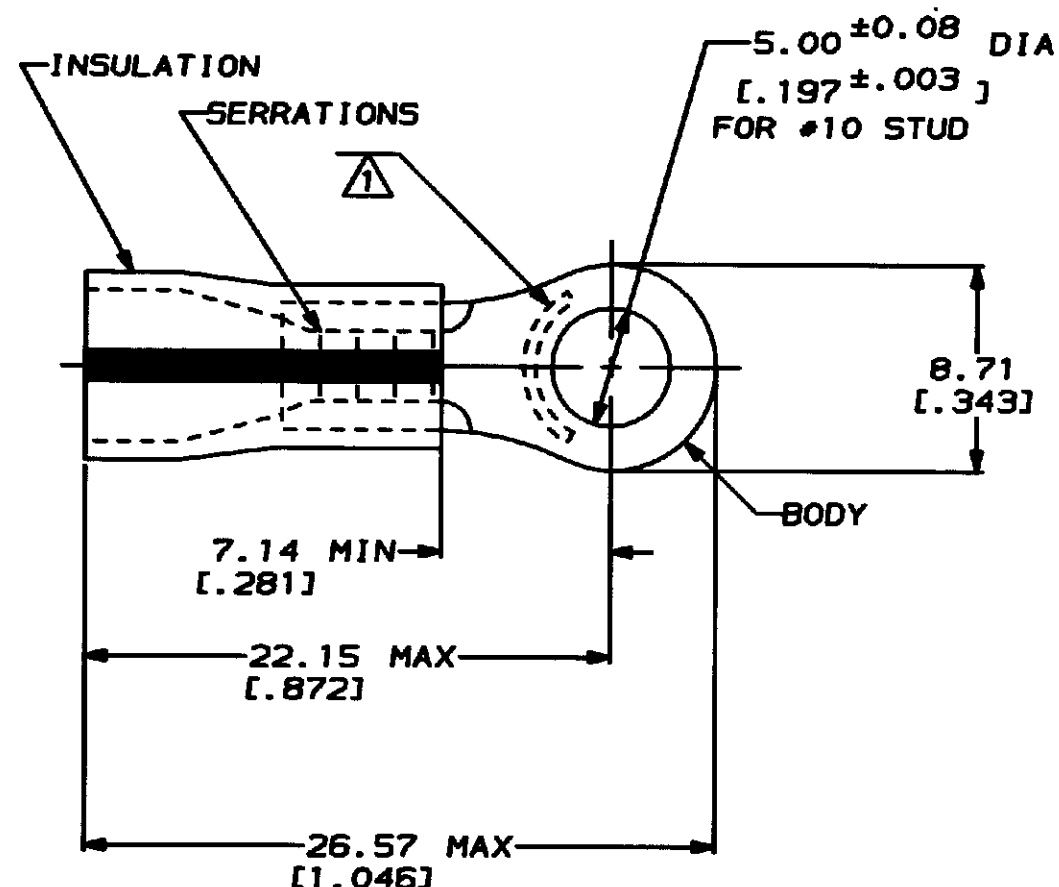

- ① STAMP AMP 16-14HD* APPROX AS SHOWN
2 WIRE INSULATION DIA: .150-.250
3 TONGUE MATERIAL THK: 1.22 ± 0.05 [.048 ± .002]

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 90°C MAX	DO NOT SCALE PRINT. UNLESS SPECIFIED	OR 05/25/93 BY 00000	2500	ON TAPE, REEL	2-321518-1
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	TOLERANCES ON: 2 PLG DEC ± 0.20(0.002) 3 PLG DEC ± - ANGLES ± -	CHK 11/16/92 RE HENRY	-	LOOSE PIECE	321518
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04-2.62mm² (2,050-5,180) SOLID OR STRANDED	MATERIAL COPPER PER ASTM B-152 PVC COLOR: YELLOW W/ BLK STP	APPO 11/16/92 RL ELLIS	QUANTITY	PACKAGE TYPE	PART NO
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	FINISH TIN PLATE PER MIL-T-10727	APPO 11/16/92 N BRADDA			
				PRODUCT SPEC 108-1034			
				APPLICATION SPEC NOT AVAILABLE			
				WEIGHT -			
					SIZE	CAGE CODE	DRAWING NO
					B	00779	C-321518
					SCALE	4:1	SHEET 1 OF 1

AMP 1470-15 REV 3-93
14 MAR 1994 09:35:44 AMP12368 <U128A>DEPT1132>U.DWG1132>U.REV>U.PLASTI-GRIP>U.CUST

CUSTOMER DRAWING