


Series 350 / 450

PCB connectors 2.54 mm

Single row / double row


Surface mount

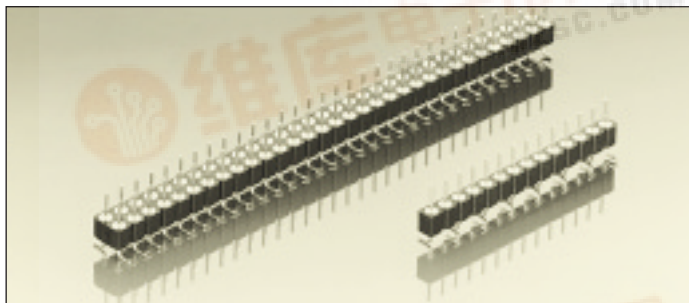

Pin connectors, surface mount

With screw machined pins $\varnothing 0.47$ mm

For corresponding receptacles see pages 36 to 42 and 47, 48



New:


Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

Replace **xx** with the number of poles, e.g. 350-10-1xx-00-106 for a single row version with 16 contacts becomes:
350-10-116-00-106

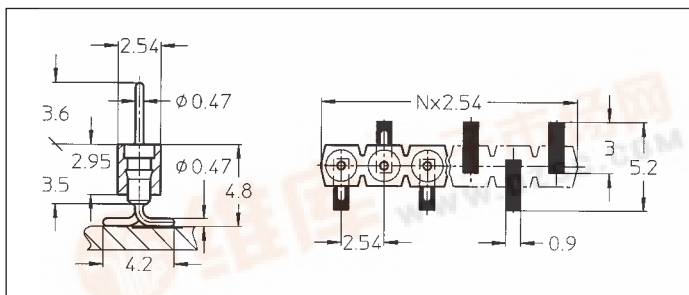


350-10-1xx-00-106

350-90-1xx-00-106

350-Z1-1xx-00-106

SMD pin connector: single row, perpendicular mount

Availability from: 3 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

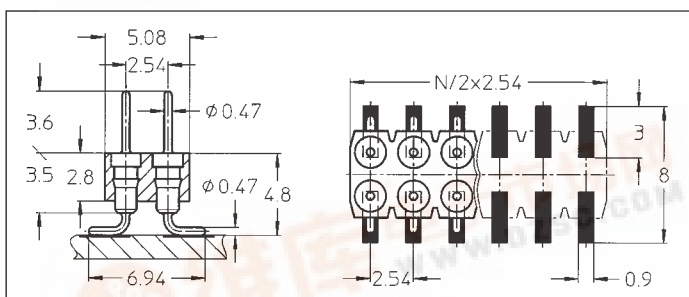


450-10-2xx-00-106

450-90-2xx-00-106

450-Z1-2xx-00-106

SMD pin connector: double row, perpendicular mount

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

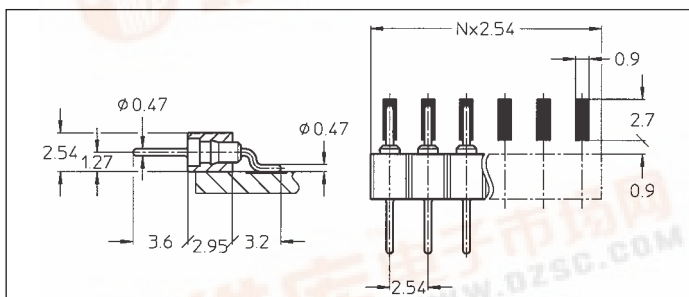

350-10-1xx-00-206

350-90-1xx-00-206

350-Z1-1xx-00-206

SMD pin connector: single row, parallel mount

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64