

August 1989

CD4016BM/CD4016BC Quad Bilateral Switch

General Description

The CD4016BM/CD4016BC is a quad bilateral switch intended for the transmission or multiplexing of analog or digital signals. It is pin-for-pin compatible with CD4066BM/CD4066BC.

Features



- Wide supply voltage range 3V to 15V
- Wide range of digital and analog switching $\pm 7.5 V_{PEAK}$
- "ON" resistance for 15V operation 400 Ω (typ.)
- Matched "ON" resistance over 15V signal input $\Delta R_{ON} = 10\Omega$ (typ.)
- High degree of linearity 0.4% distortion (typ.)
@ $f_{IS} = 1 \text{ kHz}$, $V_{IS} = 5 V_{P-P}$,
 $V_{DD} - V_{SS} = 10V$, $R_L = 10 \text{ k}\Omega$
- Extremely low "OFF" switch leakage 0.1 nA (typ.)
@ $V_{DD} - V_{SS} = 10V$
 $T_A = 25^\circ\text{C}$

- Extremely high control input impedance 10¹² Ω (typ.)
- Low crosstalk between switches -50 dB (typ.)
@ $f_{IS} = 0.9 \text{ MHz}$, $R_L = 1 \text{ k}\Omega$
- Frequency response, switch "ON" 40 MHz (typ.)

Applications

- Analog signal switching/multiplexing
 - Signal gating
 - Squelch control
 - Chopper
 - Modulator/Demodulator
 - Commutating switch
- Digital signal switching/multiplexing
- CMOS logic implementation
- Analog-to-digital/digital-to-analog conversion
- Digital control of frequency, impedance, phase, and analog-signal gain

Schematic and Connection Diagrams

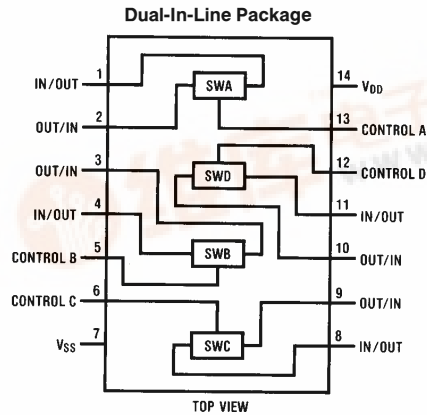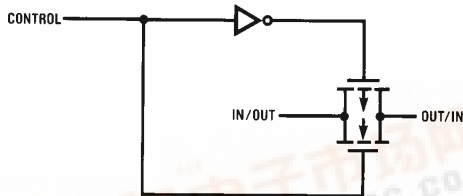

Order Number CD4016B

TL/F/5661-1



Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

(Notes 1 and 2)

V_{DD} Supply Voltage −0.5V to +18V

V_{IN} Input Voltage −0.5V to V_{DD} + 0.5V

T_S Storage Temperature Range −65°C to +150°C

Power Dissipation (P_D)

Dual-In-Line 700 mW

Small Outline 500 mW

Lead Temperature (Soldering, 10 seconds) 260°C

Recommended Operating Conditions (Note 2)

V_{DD} Supply Voltage 3V to 15V

V_{IN} Input Voltage 0V to V_{DD}

T_A Operating Temperature Range

CD4016BM −55°C to +125°C

CD4016BC −40°C to +85°C

DC Electrical Characteristics CD4016BM (Note 2)

Symbol	Parameter	Conditions	−55°C		25°C			125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{DD}	Quiescent Device Current	V _{DD} = 5V, V _{IN} = V _{DD} or V _{SS} V _{DD} = 10V, V _{IN} = V _{DD} or V _{SS} V _{DD} = 15V, V _{IN} = V _{DD} or V _{SS}		0.25 0.5 1.0		0.01 0.01 0.01	0.25 0.5 1.0		7.5 15 30	μA μA μA
Signal Inputs and Outputs										
R _{ON}	“ON” Resistance	R _L = 10 kΩ to $\frac{V_{DD}-V_{SS}}{2}$ V _C = V _{DD} , V _{IS} = V _{SS} or V _{DD} V _{DD} = 10V V _{DD} = 15V R _L = 10 kΩ to $\frac{V_{DD}-V_{SS}}{2}$ V _C = V _{DD} V _{DD} = 10V, V _{IS} = 4.75 to 5.25V V _{DD} = 15V, V _{IS} = 7.25 to 7.75V		600 360		250 200	660 400		960 600	Ω Ω
				1870 775		850 400	2000 850		2600 1230	Ω Ω
ΔR _{ON}	Δ“ON” Resistance Between any 2 of 4 Switches (In Same Package)	R _L = 10 kΩ to $\frac{V_{DD}-V_{SS}}{2}$ V _C = V _{DD} , V _{IS} = V _{SS} to V _{DD} V _{DD} = 10V V _{DD} = 15V				15 10				Ω Ω
I _{IS}	Input or Output Leakage Switch “OFF”	V _C = 0, V _{DD} = 15V V _{IS} = 15V and 0V, V _{OS} = 0V and 15V		± 50		± 0.1	± 50		± 500	nA
Control Inputs										
V _{ILC}	Low Level Input Voltage	V _{IS} = V _{SS} and V _{DD} V _{OS} = V _{DD} and V _{SS} I _{IS} = ± 10 μA V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		0.9 0.9 0.9			0.7 0.7 0.7		0.5 0.5 0.5	V V V
V _{IHC}	High Level Input Voltage	V _{DD} = 5V V _{DD} = 10V (see Note 6 and V _{DD} = 15V Figure 8)	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		V V V
I _{IN}	Input Current	V _{DD} − V _{SS} = 15V V _{DD} ≥ V _{IS} ≥ V _{SS} V _{DD} ≥ V _C ≥ V _{SS}		± 0.1		± 10 ^{−5}	± 0.1		± 1.0	μA

DC Electrical Characteristics CD4016BC (Note 2) (Continued)

Symbol	Parameter	Conditions	−40°C		25°C			85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{DD}	Quiescent Device Current	V _{DD} = 5V, V _{IN} = V _{DD} or V _{SS} V _{DD} = 10V, V _{IN} = V _{DD} or V _{SS} V _{DD} = 15V, V _{IN} = V _{DD} or V _{SS}		1.0 2.0 4.0		0.01 0.01 0.01	1.0 2.0 4.0		7.5 15 30	μA μA μA
Signal Inputs and Outputs										
R _{ON}	“ON” Resistance	R _L = 10 kΩ to $\frac{V_{DD}-V_{SS}}{2}$ V _C = V _{DD} , V _{IS} = V _{SS} or V _{DD} V _{DD} = 10V V _{DD} = 15V R _L = 10 kΩ to $\frac{V_{DD}-V_{SS}}{2}$ V _C = V _{DD} V _{DD} = 10V, V _{IS} = 4.75 to 5.25V V _{DD} = 15V, V _{IS} = 7.25 to 7.75V		610 370 1900 790		275 200 850 400	660 400 2000 850		840 520 2380 1080	Ω Ω Ω Ω
ΔR _{ON}	Δ“ON” Resistance Between any 2 of 4 Switches (In Same Package)	R _L = 10 kΩ to $\frac{V_{DD}-V_{SS}}{2}$ V _C = V _{DD} , V _{IS} = V _{SS} to V _{DD} V _{DD} = 10V V _{DD} = 15V				15 10				Ω Ω
I _{IS}	Input or Output Leakage Switch “OFF”	V _C = 0, V _{DD} = 15V V _{IS} = 0V or 15V, V _{OS} = 15V or 0V		± 50		± 0.1	± 50		± 200	nA
Control Inputs										
V _{ILC}	Low Level Input Voltage	V _{IS} = V _{SS} and V _{DD} V _{OS} = V _{DD} and V _{SS} I _{IS} = ± 10 μA V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		0.9 0.9 0.9			0.7 0.7 0.7		0.4 0.4 0.4	V V V
V _{IHC}	High Level Input Voltage	V _{DD} = 5V V _{DD} = 10V (see Note 6 and V _{DD} = 15V <i>Figure 8</i>)	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		V V V
I _{IN}	Input Current	V _{CC} − V _{SS} = 15V V _{DD} ≥ V _{IS} ≥ V _{SS} V _{DD} ≥ V _C ≥ V _{SS}		± 0.3		± 10 ^{−5}	± 0.3		± 1.0	μA

AC Electrical Characteristics* T_A = 25°C, t_r = t_f = 20 ns and V_{SS} = 0V unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t _{PHL} , t _{PLH}	Propagation Delay Time Signal Input to Signal Output	V _C = V _{DD} , C _L = 50 pF, (Figure 1)				
		R _L = 200k				
		V _{DD} = 5V		58	100	ns
		V _{DD} = 10V		27	50	ns
t _{PZH} , t _{PZL}	Propagation Delay Time Control Input to Signal Output High Impedance to Logical Level	V _{DD} = 15V		20	40	ns
		R _L = 1.0 kΩ, C _L = 50 pF, (Figures 2 and 3)				
		V _{DD} = 5V		20	50	ns
		V _{DD} = 10V		18	40	ns
t _{PHZ} , t _{PLZ}	Propagation Delay Time Control Input to Signal Output Logical Level to High Impedance	V _{DD} = 15V		17	35	ns
		R _L = 1.0 kΩ, C _L = 50 pF, (Figures 2 and 3)				
		V _{DD} = 5V		15	40	ns
		V _{DD} = 10V		11	25	ns
	Sine Wave Distortion	V _{DD} = 15V		10	22	ns
		V _C = V _{DD} = 5V, V _{SS} = −5		0.4		%
		R _L = 10 kΩ, V _{IS} = 5 V _{P-P} , f = 1 kHz, (Figure 4)				

AC Electrical Characteristics* (Continued)

$T_A = 25^\circ\text{C}$, $t_r = t_f = 20\text{ ns}$ and $V_{SS} = 0\text{V}$ unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
	Frequency Response — Switch “ON” (Frequency at -3 dB)	$V_C = V_{DD} = 5\text{V}$, $V_{SS} = -5\text{V}$, $R_L = 1\text{ k}\Omega$, $V_{IS} = 5\text{ V}_{P-P}$, $20\text{ Log}_{10} V_{OS}/V_{OS}(1\text{ kHz}) - \text{dB}$, (Figure 4)		40		MHz
	Feedthrough — Switch “OFF” (Frequency at -50 dB)	$V_{DD} = 5\text{V}$, $V_C = V_{SS} = -5\text{V}$, $R_L = 1\text{ k}\Omega$, $V_{IS} = 5\text{ V}_{P-P}$, $20\text{ Log}_{10} (V_{OS}/V_{IS}) = -50\text{ dB}$, (Figure 4)		1.25		MHz
	Crosstalk Between Any Two Switches (Frequency at -50 dB)	$V_{DD} = V_{C(A)} = 5\text{V}$; $V_{SS} = V_{C(B)} = -5\text{V}$, $R_L = 1\text{ k}\Omega$, $V_{IS(A)} = 5\text{ V}_{P-P}$, $20\text{ Log}_{10} (V_{OS(B)}/V_{OS(A)}) = -50\text{ dB}$, (Figure 5)		0.9		MHz
	Crosstalk; Control Input to Signal Output	$V_{DD} = 10\text{V}$, $R_L = 10\text{ k}\Omega$, $R_{IN} = 1\text{ k}\Omega$, $V_{CC} = 10\text{V}$ Square Wave, $C_L = 50\text{ pF}$ (Figure 6)		150		mV _{P-P}
	Maximum Control Input	$R_L = 1\text{ k}\Omega$, $C_L = 50\text{ pF}$, (Figure 7) $V_{OS(f)} = 1/2 V_{OS}(1\text{ kHz})$				
		$V_{DD} = 5\text{V}$		6.5		MHz
		$V_{DD} = 10\text{V}$		8.0		MHz
		$V_{DD} = 15\text{V}$		9.0		MHz
C_{IS}	Signal Input Capacitance			4		pF
C_{OS}	Signal Output Capacitance	$V_{DD} = 10\text{V}$		4		pF
C_{IOS}	Feedthrough Capacitance	$V_C = 0\text{V}$		0.2		pF
C_{IN}	Control Input Capacitance			5	7.5	pF

*AC Parameters are guaranteed by DC correlated testing.

Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of “Recommended Operating Conditions” and “Electrical Characteristics” provide conditions for actual device operation.

Note 2: $V_{SS} = 0\text{V}$ unless otherwise specified.

Note 3: These devices should not be connected to circuits with the power “ON”.

Note 4: In all cases, there is approximately 5 pF of probe and jig capacitance on the output; however, this capacitance is included in C_L wherever it is specified.

Note 5: V_{IS} is the voltage at the in/out pin and V_{OS} is the voltage at the out/in pin. V_C is the voltage at the control input.

Note 6: If the switch input is held at V_{DD} , V_{IHC} is the control input level that will cause the switch output to meet the standard “B” series V_{OH} and I_{OH} output levels. If the analog switch input is connected to V_{SS} , V_{IHC} is the control input level — which allows the switch to sink standard “B” series $|I_{OH}|$, high level current, and still maintain a $V_{OL} \leq “B”$ series. These currents are shown in Figure 8.

AC Test Circuits and Switching Time Waveforms

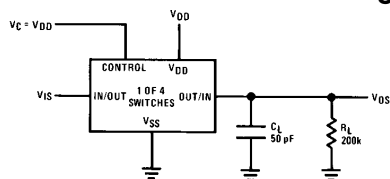


Figure 1. t_{PLH} , t_{PLH} Propagation Delay Time Signal Input to Signal Output



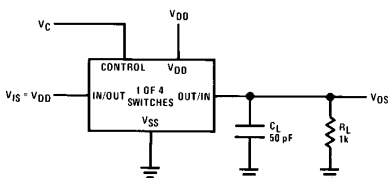


FIGURE 2. t_{PZH} , t_{PHZ} Propagation Delay Time Control to Signal Output

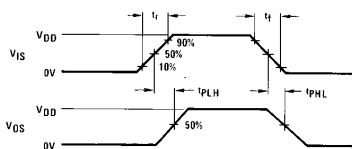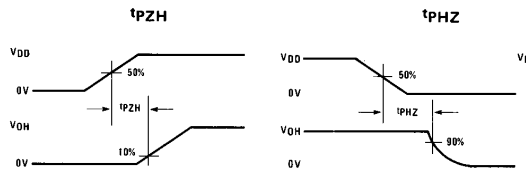

TL/F/5661-2

AC Test Circuits and Switching Time Waveforms (Continued)

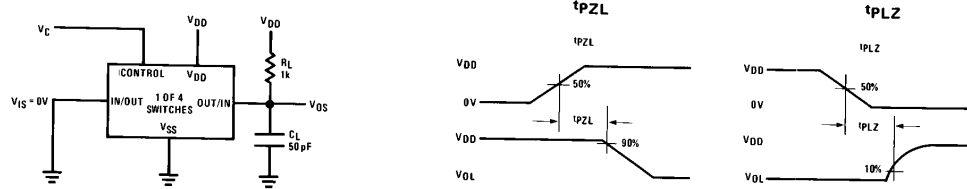


FIGURE 3. t_{pZH} , t_{pHZ} Propagation Delay Time Control to Signal Output

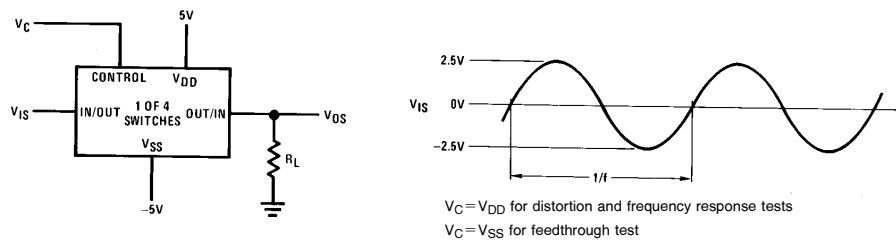


FIGURE 4. Sine Wave Distortion, Frequency Response and Feedthrough

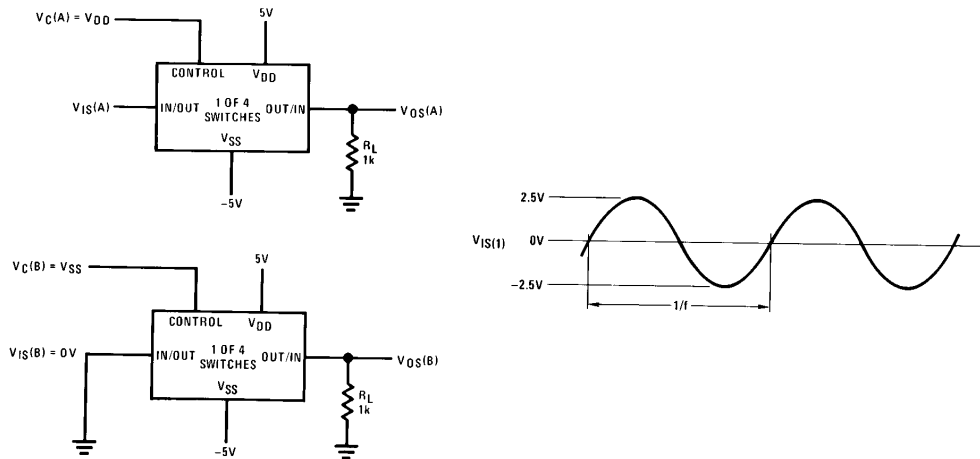


FIGURE 5. Crosstalk Between Any Two Switches

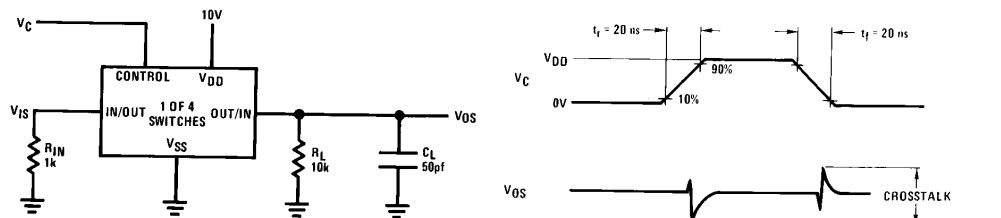


FIGURE 6. Crosstalk — Control to Input Signal Output

TL/F/5661-3

AC Test Circuits and Switching Time Waveforms (Continued)

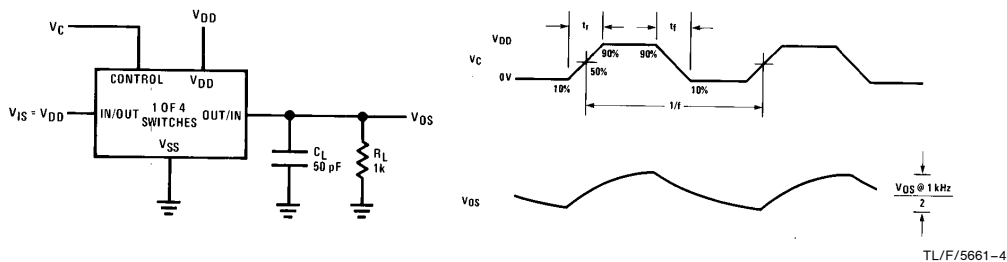



FIGURE 7. Maximum Control Input Frequency

Temperature Range	V_{DD}	V_{IS}	Switch Input			Switch Output $V_{OS}(V)$	
			I_{IS} (mA)			Min	Max
			T_{LOW}	25°C	T_{HIGH}		
MILITARY	5	0	0.25	0.2	0.14		0.4
	5	5	-0.25	-0.2	-0.14	4.6	
	10	0	0.62	0.5	0.35		0.5
	10	10	-0.62	-0.5	-0.35	9.5	
	15	0	1.8	1.5	1.1		1.5
COMMERCIAL	15	15	-1.8	-1.5	-1.1	13.5	
	5	0	0.2	0.16	0.12		0.4
	5	5	-0.2	-0.16	-0.12	4.6	
	10	0	0.5	0.4	0.3		0.5
	10	10	-0.5	-0.4	-0.3	9.5	
	15	0	1.4	1.2	1.0		1.5
	15	15	-1.4	-1.2	-1.0	13.5	


FIGURE 8. CD4016B Switch Test Conditions for V_{IHC}

Typical Performance Characteristics


'ON' Resistance vs. Signal Voltage $T_A = 25^\circ C$



'ON' Resistance Temperature Variation for $V_{DD} - V_{SS} = 10V$





'ON' Resistance Temperature Variation for $V_{DD} - V_{SS} = 15V$



TL/F/5661-5

Typical Applications

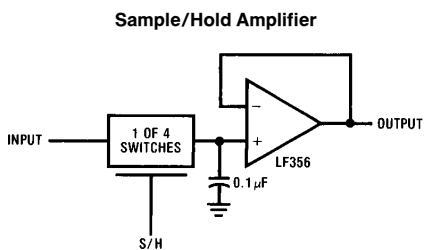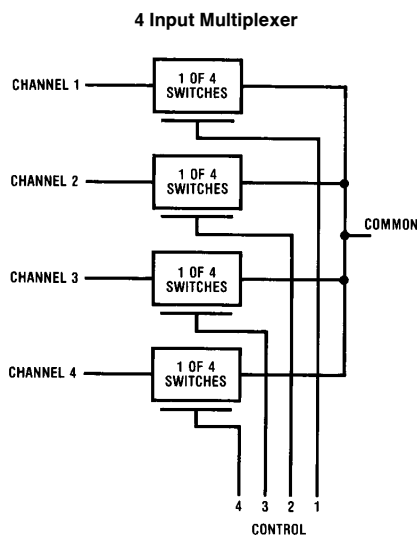


TL/F/5661-6

Special Considerations


The CD4016B is composed of 4, two-transistor analog switches. These switches do not have any linearization or compensation circuitry for "R_{ON}" as do the CD4066B's. Because of this, the special operating considerations for the CD4066B do not apply to the CD4016B, but at low

supply voltages, $\leq 5V$, the CD4016B's on resistance becomes non-linear. It is recommended that at 5V, voltages on the in/out pins be maintained within about 1V of either V_{DD} or V_{SS}; and that at 3V the voltages on the in/out pins should be at V_{DD} or V_{SS} for reliable operation.

Physical Dimensions inches (millimeters)

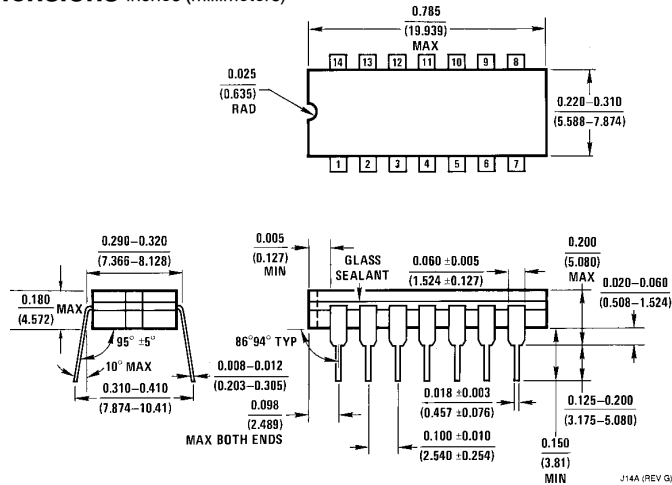

Dual-In-Line Package
Order Number CD4016CJ or CD4016MJ
NS Package J14A

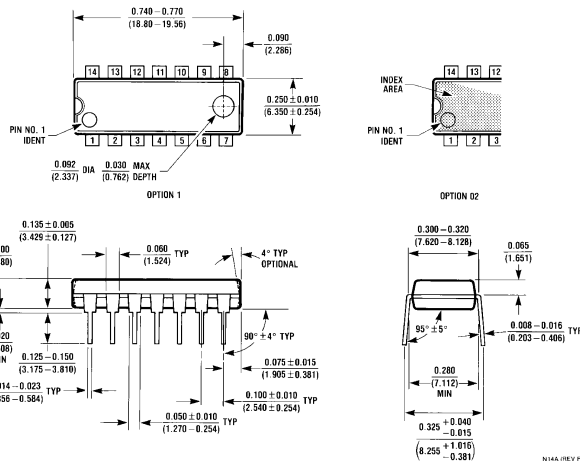

Dual-In-Line Package
Order Number CD4016CN
NS Package N14A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408