


Low current appliance inlet Type 0724


Screw-on mounting
front- or rear-side
Solder terminals for wires
or PCB
Pin temperature 70 °C
Protection class I



Solder terminals for wires



Terminals for PCB

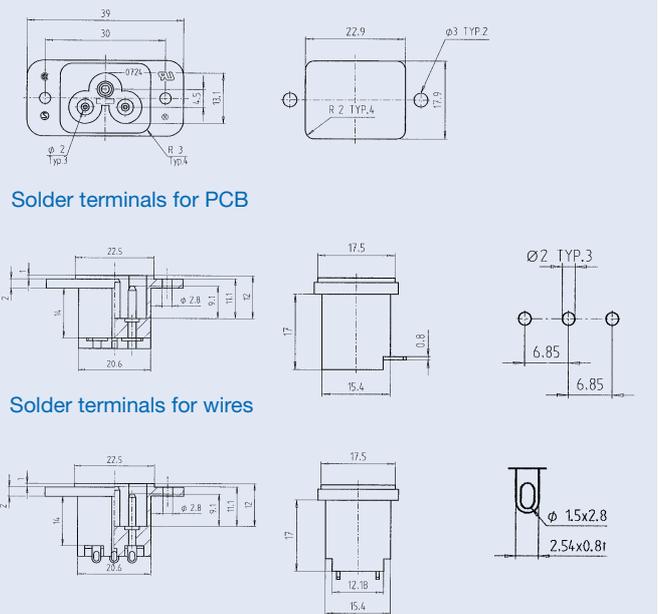

Technical data:

- Rated current/voltage: 2,5 A/250 VAC
- Insulation resistance: > 100 MΩ (500 VDC, 1 Min.)
- Dielectric strength: 2 kV (50 Hz, 1 Min.) (between terminals)
- Material:
 - Socket: thermoplastic, PBT, black, 30% glass fib., UL 94V-0
 - Prongs and terminals: copper alloy, tin-plated

Standards

UL 498, CSA C 22,2,
IEC/EN 60320-1/C6

Approvals

	SEV	(2,5 A / 250 VAC)		UL	(2,5 A / 250 VAC)
	VDE	(2,5 A / 250 VAC)		CSA	(2,5 A / 250 VAC)
	SEMCO	(2,5 A / 250 VAC)			

Order Numbers

Screw-on	Type	Terminals
4300.0100	0724	Solder terminals
4300.0101	0724	PCB solder terminals