
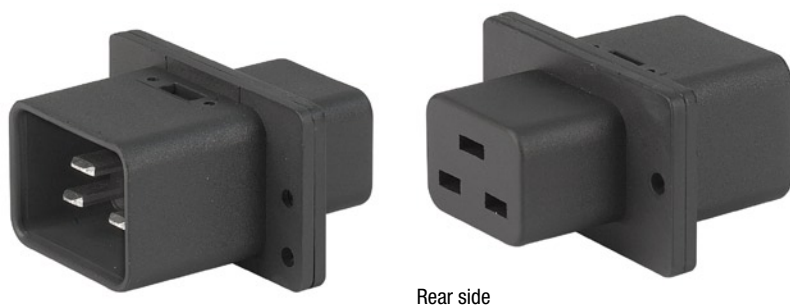


IEC gender changer IEC C20 / IEC J, screw-on mounting



Rear side

**Description**

- Panel Mount:
Screw-on from front or rear-side
- Inlet, Pin temperature 70 °C, Protection class I

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Ratings IEC	16 A / 250 VAC; Hz 50
Ratings UL/CSA	20 A / 125 VAC; 60 Hz
Dielectric Strength	> 4 kVAC between L-N > 6 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529 from rear-side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Panel Thickness s	Screw-on: Mounting screw torque max 0.5 Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet /-Outlet	C20 acc. to IEC/EN 60320-1 and J acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 16 A, Protection class I
--------------------------	--

Dimensions

Length 53 mm

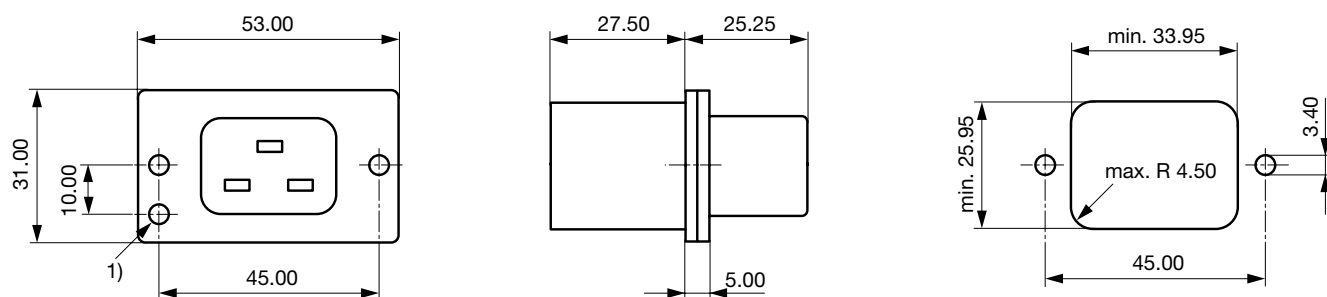

1) Orientation hole

Variants

Panel mounting	Panel Thickness s [mm]	Order Number
Screw-on	8	4730.0100

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Packaging unit 100 Pcs