



5082-2207

SCHOTTKY MEDIUM BARRIER DIODE

DESCRIPTION:


The **ASI 5082-2207** is a Medium Barrier Schottky Diode designed for General Purpose Mixer Applications.

FEATURES INCLUDE:

- Small size
- Low noise figure

MAXIMUM RATINGS:

P_{DISS}	125 mW @ T _A = 25 °C
T_J	-65 °C to +150 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	1000 °C/W

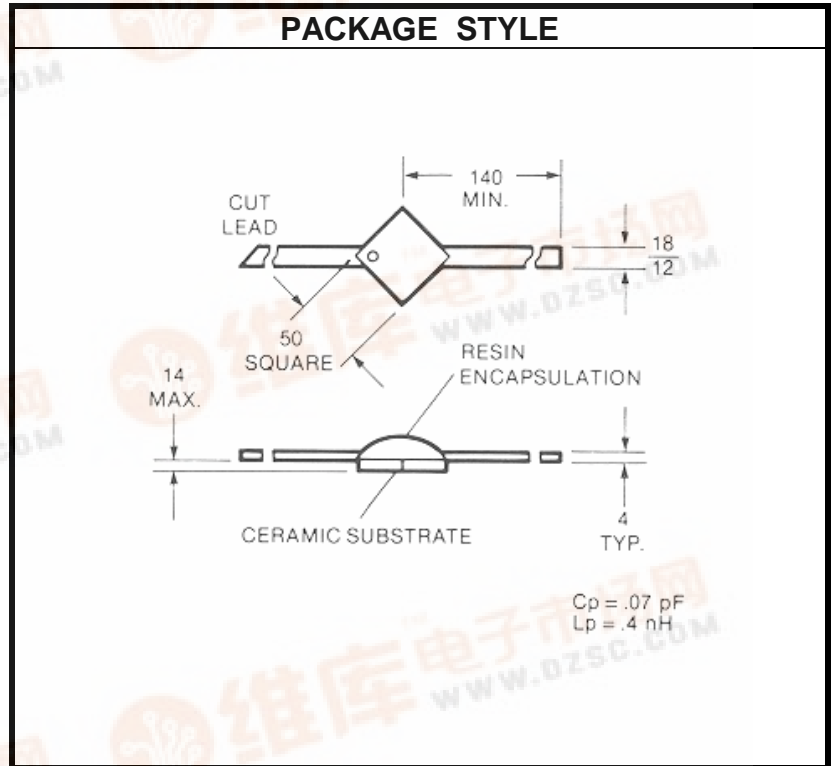

CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
NF	DC Load Resistance = 0 Ω			6.0	DB
Z _{IF}	L.O. Power = 1.0 mW	200		400	Ω
SRW	I _F = 30 MHz			1.5:1	---
C _J	V _R = 0 V		0.18		pF
TSS	20μA Bias		-54		dBm
γ	P _{IN} = -40 dBm		6.6		mV/μW
R _V	Video Bandwidth = 2.0 MHz f = 10 GHz		1400		Ω

