

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 753740


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19.

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
G	14			ZONE	LTR	DESCRIPTION	DATE	APPD
					AB	REV PER 063A-0614-01	19NOV01	JR TM

AMP WIRE RANGE	FILE E13288	LR7189 Certified
6 AWG STRANDED	6 AWG STRANDED	6 AWG STRANDED

- 1 STAMP AMP 6* LOCATE APPROX AS SHOWN
2. TONGUE MATERIAL THK 1.14±0.08[.045±.003]
3. SEE TABLE FOR WIRE INSULATION DIA MAX
4. TAPE ITEMS ARE ON 30.48[1.200] CENTERS
- 5 OBSOLETED AND REPLACED BY 52042-5

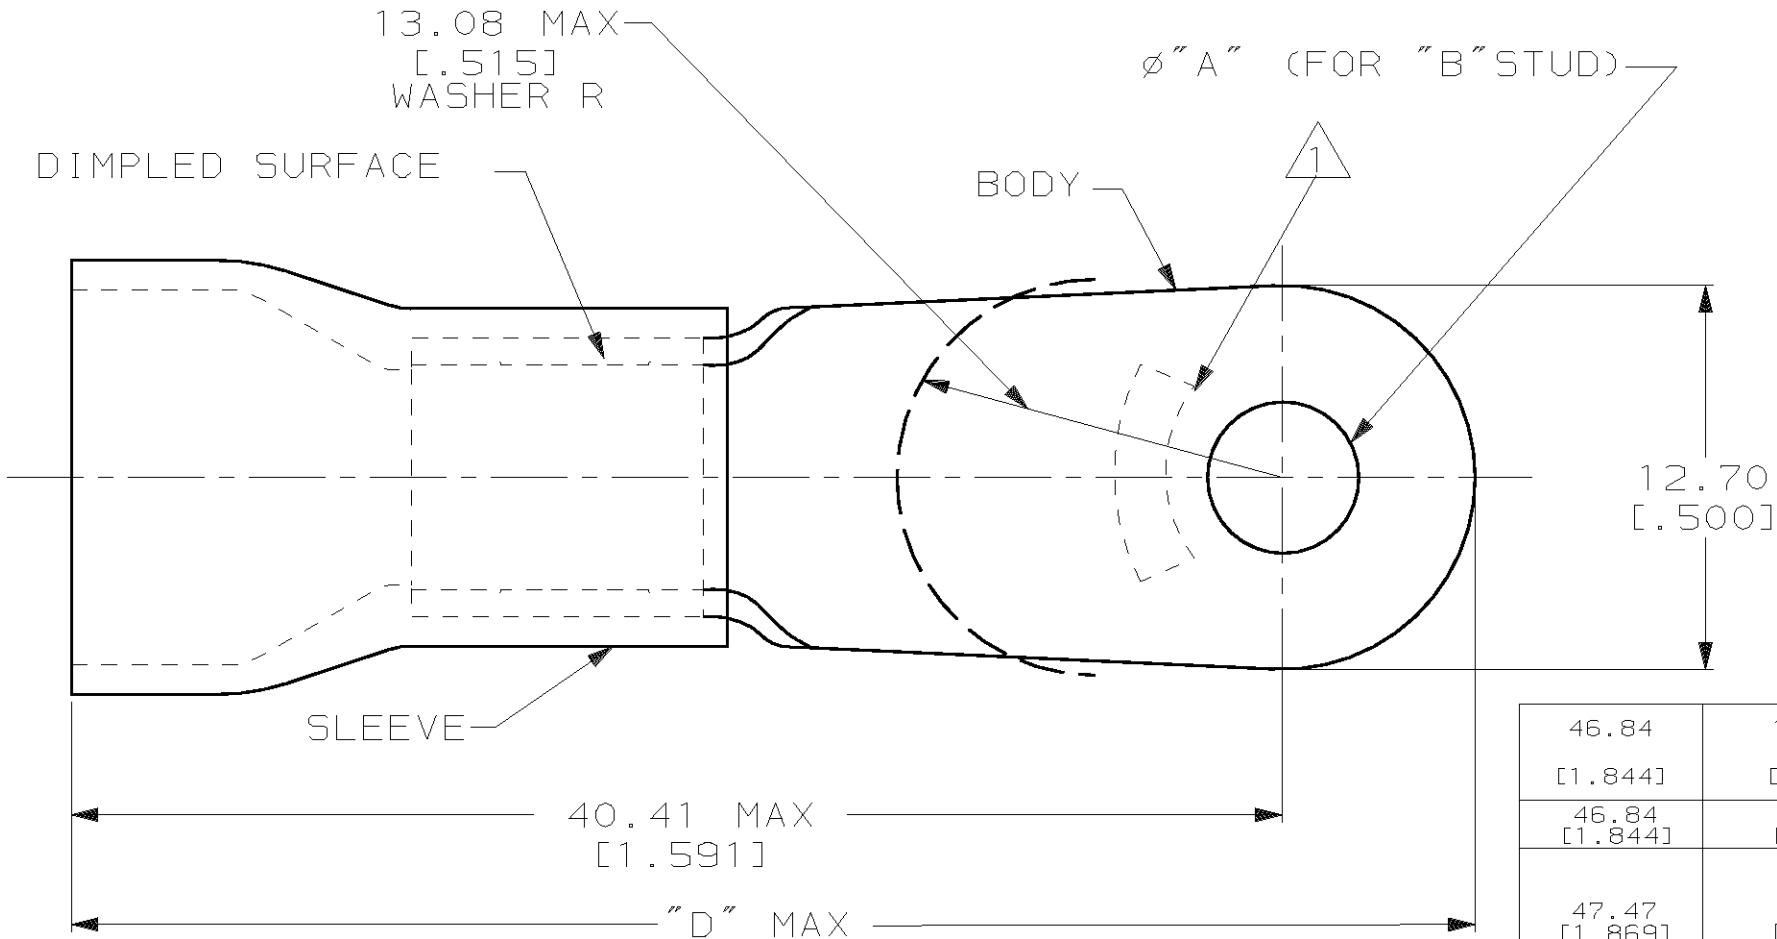

46.84 [1.844]	11.43 [.450]	1/4	6.73±0.13 [.265±.005]	500	ON TAPE	1-52042-4
46.84 [1.844]	11.07 [.436]	#10	5.00±0.08 [.197±.003]	100	LOOSE PC	1-52042-3
47.47 [1.869]	9.14 [.360]	1/4	6.73±0.13 [.265±.005]	500	ON TAPE	1-52042-0
46.84 [1.844]	11.07 [.436]			100	LOOSE PC, BOX SPL	5 9-52042-5
47.47 [1.869]	9.14 [.360]	#8	4.34±0.08 [.171±.003]	20	ON TAPE	8-52042-5
46.84 [1.844]	11.07 [.436]	#10	5.00±0.08 [.197±.003]	500		52042-9
47.47 [1.869]	9.14 [.360]	1/4	6.73±0.13 [.265±.005]	100		52042-7
46.84 [1.844]	11.07 [.436]	#8	4.34±0.08 [.171±.003]	100	LOOSE PC	52042-6
47.47 [1.869]	9.14 [.360]	1/4	6.73±0.13 [.265±.005]	100		52042-5
46.84 [1.844]	11.07 [.436]	#8	4.34±0.08 [.171±.003]	100		52042-4
47.47 [1.869]	9.14 [.360]	1/4	6.73±0.13 [.265±.005]	100		52042-3
46.84 [1.844]	11.07 [.436]	#8	4.34±0.08 [.171±.003]	100		52042-2
47.47 [1.869]	9.14 [.360]	1/4	6.73±0.13 [.265±.005]	100		52042-1
46.84 [1.844]	11.07 [.436]	#8	4.34±0.08 [.171±.003]	100		52042
"D"	WIRE INSULATION DIA	"B"	"A"	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

FOR APPLICATION TOOLING INFORMATION

FOR ORDER ENTRY

PRODUCT INFORMATION CENTER
1-800-522-6752

TOOLING ASSISTANCE CENTER
1-800-722-1111

1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
90°C

VOLTAGE RATING
600 V MAX

CIRCULAR MIL AREA:
10.54-16.77mm² [20,800-33,100] STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:
2 PLC DEC ± 0.20[.008]
3 PLC DEC ± -
ANGLES ± -

MATERIAL
COPPER PER ASTM B-152
PVC, COLOR, BLUE

FINISH
TIN PLATE PER ASTM B 545

DR 9-29-93
S.S. GOULDEN

CHK 9-29-93
R. HERSEY

APPD 9-29-93
B. BARE

APPD 9-29-93
M. ELLIS

PRODUCT SPEC
NOT AVAILABLE

APPLICATION SPEC
NOT AVAILABLE

WEIGHT -

AMP AMP Incorporated
Harrisburg, PA 17105-3608

NAME
TERMINAL, RING TONGUE, PLASTIC-GRIP™, WIRE SIZE, 6 AWG

SIZE B CAGE CODE 00779 DRAWING NO C-52042

SCALE NTS SHEET 1 OF 1