

# EMC-Power Line Filters for 1-Phase Systems

**FMLB Series, all-purpose filters to Protection Class I, conform to EN 133200, UL 1283 and IEC 60950**

Nominal current: 6 – 20 A @ 40 °C  
 Rated voltage  $U_R$  ( $U_{max}$ ): 125/250 VAC 50/60 Hz  
 Attenuation: Standard  
 Leakage current: for Standard and Medical applications  
 Test voltages: L/N → E 2.7 kVDC, 2 sec  
 L → N 1.7 kVDC, 2 sec \*  
 Climatic category: 25/100/21 acc. to IEC 60068-1  
 50% saturation typ.: 2 to 3 x  $I_N$  @ 20 °C  
 Inrush current: 1.5 x  $I_N$  1 min. per hour  
 MTBF @ 40 °C /  $U_R$  ( $U_{max}$ ): > 200'000 h acc. To MIL-HB-217 F

\* without resistor

Approvals:



The SCHURTER filter family has been specially developed for universal industrial applications such as:

- Control systems
- Power supplies
- Stepper motor drives
- Power converters

International approvals center (i.e. UL) today demand high filter performance with regard to attenuation and loading characteristics. During the design, special considerations were made for applications that require high attenuation at the specified maximum load or where asymmetrical loading of the filter occur independently from line impedance at the installation site. The implemented filter range wholly conforms to the requirements of the international standards EN 133200, UL 1283 and IEC 60950 and is ideally suited for applications with EN 55011, EN 55014 and EN 55022 requirements.

## Order Numbers and Technical Data

Type FMLB	$I_N$ (1)	$U_R$	$L_N$ (2)	Leakage current (3)	$C_x(X2)$	$C_y(Y2)$	R	Case
Standard	@ $\vartheta_a$ 40 °C [A]	( $U_{max}$ ) [VAC]	-30% / +50% [mH]	@ 250 V / 50 Hz [mA]	[ $\mu$ F]	[nF]	[M $\Omega$ ]	
5500.2031	6	250	2 x 1.80	< 0.5	0.1	4.7	1	73
5500.2032	10	250	2 x 0.82	< 0.5	0.1	4.7	1	73
5500.2033	16	250	2 x 0.64	< 0.5	0.1	4.7	1	73
5500.2034	20	250	2 x 0.50	< 0.5	0.1	4.7	1	73
Type FMLB	$I_N$ (1)	$U_R$	$L_N$ (2)	Leakage current (3)	$C_x(X2)$	$C_y(Y2)$	R	Case
Medical M5	@ $\vartheta_a$ 40 °C [A]	( $U_{max}$ ) [VAC]	-30% / +50% [mH]	@ 250 V / 50 Hz [ $\mu$ A]	[ $\mu$ F]	[nF]	[M $\Omega$ ]	
5500.2072	6	250	2 x 1.80	< 5	0.1	-	1	73
5500.2073	10	250	2 x 0.82	< 5	0.1	-	1	73
5500.2074	16	250	2 x 0.64	< 5	0.1	-	1	73
5500.2076	20	250	2 x 0.50	< 5	0.1	-	1	73


(1) Current derating over 40°C :  $I = I_N \times \sqrt{(100-\vartheta_a)/60}$

(2) Nominal inductance measured according to EN 138100, see introduction of this catalog, paragraph 3.4

(3) Measured according to IEC 60950 5.2.3 Annex D, see introduction of this catalog, paragraph 3.5

Versions with connecting cables are available on request: min. order 100 pieces.

## Case 73

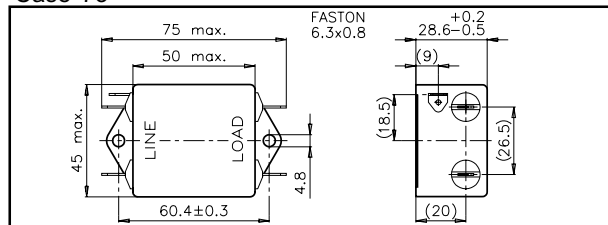

## Circuit diagram

