



CY7C132/CY7C136 CY7C142/CY7C146

2Kx8 Dual-Port Static RAM

Features

- True Dual-Ported memory cells which allow simultaneous reads of the same memory location
- 2K x 8 organization
- 0.65-micron CMOS for optimum speed/power
- High-speed access: 15 ns
- Low operating power: $I_{CC} = 90$ mA (max.)
- Fully asynchronous operation
- Automatic power-down
- Master CY7C132/CY7C136 easily expands data bus width to 16 or more bits using slave CY7C142/CY7C146
- $\overline{BUSY}$ output flag on CY7C132/CY7C136; $\overline{BUSY}$ input on CY7C142/CY7C146
- $\overline{INT}$ flag for port-to-port communication (52-pin PLCC/PQFP versions)
- Available in 48-pin DIP (CY7C132/142), 52-pin PLCC and 52-pin TQFP (CY7C136/146)
- Pin-compatible and functionally equivalent to IDT7132/IDT7142

Functional Description


The CY7C132/CY7C136/CY7C142 and CY7C146 are high-speed CMOS 2K by 8 dual-port static RAMs. Two ports are provided to permit independent access to any location in memory. The CY7C132/ CY7C136 can be utilized as either a standalone 8-bit dual-port static RAM or as a MASTER dual-port RAM in conjunction with the CY7C142/CY7C146 SLAVE dual-port device in systems requiring 16-bit or greater word widths. It is the solution to applications requiring shared or buffered data such as cache memory for DSP, bit-slice, or multiprocessor designs.

Each port has independent control pins; chip enable ($\overline{CE}$), write enable ($\overline{R/W}$), and output enable ($\overline{OE}$). $\overline{BUSY}$ flags are provided on each port. In addition, an interrupt flag ($\overline{INT}$) is provided on each port of the 52-pin PLCC version. $\overline{BUSY}$ signals that the port is trying to access the same location currently being accessed by the other port. On the PLCC version, $\overline{INT}$ is an interrupt flag indicating that data has been placed in a unique location (7FF for the left port and 7FE for the right port).

An automatic power-down feature is controlled independently on each port by the chip enable ($\overline{CE}$) pins.

The CY7C132/CY7C142 are available in 48-pin DIP. The CY7C136/CY7C146 are available in 52-pin PLCC and PQFP.

Logic Block Diagram

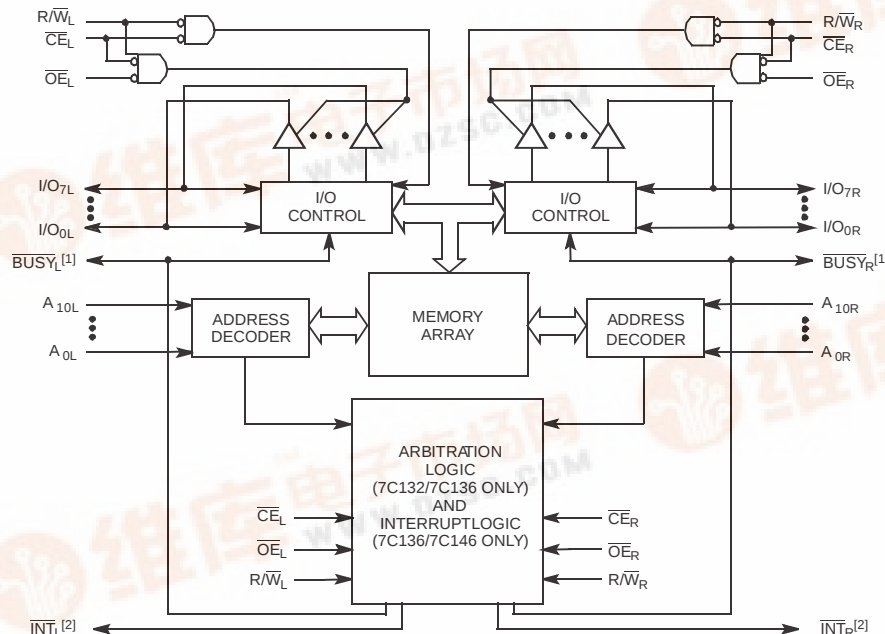

Pin Configuration


DIP Top View		
$\overline{CE}_L$	1	48 V_{CC}
$\overline{R/W}_L$	2	47 $\overline{CE}_R$
$\overline{BUSY}_L$	3	46 $\overline{R/W}_R$
A_{10L}	4	45 $\overline{BUSY}_R$
$\overline{OE}_L$	5	44 A_{10R}
A_{0L}	6	43 $\overline{OE}_R$
A_{1L}	7	42 A_{0R}
A_{2L}	8	41 A_{1R}
A_{3L}	9	40 A_{2R}
A_{4L}	10	39 A_{3R}
A_{5L}	11	38 A_{4R}
A_{6L}	12	37 A_{5R}
A_{7L}	13	36 A_{6R}
A_{8L}	14	35 A_{7R}
A_{9L}	15	34 A_{8R}
I/O_{0L}	16	33 A_{9R}
I/O_{1L}	17	32 I/O_{7R}
I/O_{2L}	18	31 I/O_{6R}
I/O_{3L}	19	30 I/O_{5R}
I/O_{4L}	20	29 I/O_{4R}
I/O_{5L}	21	28 I/O_{3R}
I/O_{6L}	22	27 I/O_{2R}
I/O_{7L}	23	26 I/O_{1R}
GND	24	25 I/O_{0R}

C132-1

C132-2

Notes:



1. CY7C132/CY7C136 (Master): $\overline{BUSY}$ is open drain output and requires pull-up resistor.
2. CY7C142/CY7C146 (Slave): $\overline{BUSY}$ is input.
3. Open drain outputs; pull-up resistor required.





CY7C132/CY7C136 CY7C142/CY7C146

Pin Configurations (continued)

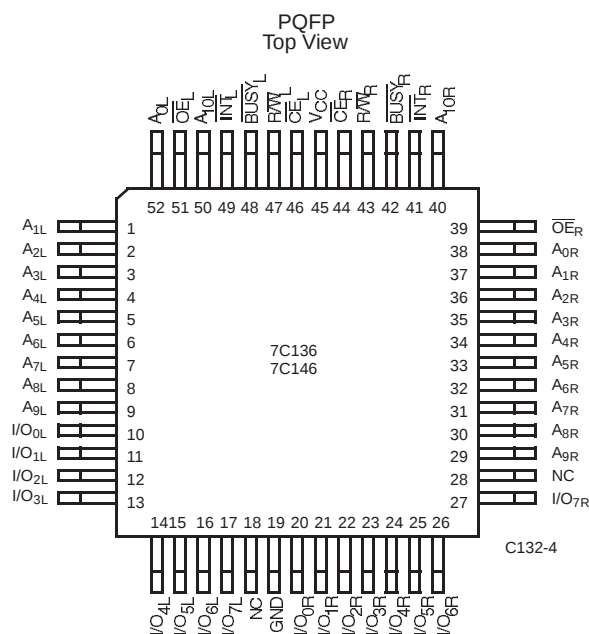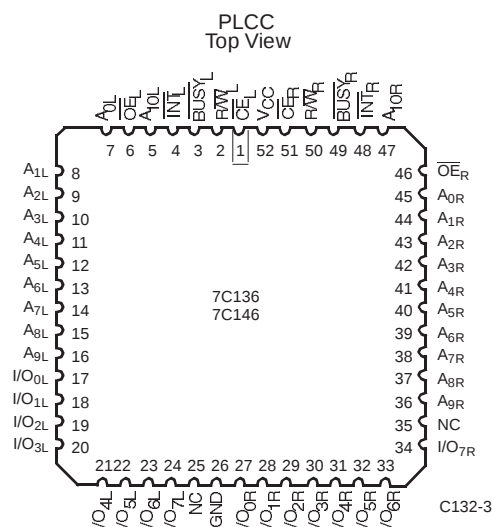

Selection Guide

		7C136-15 ^[3,4] 7C146-15	7C132-25 ^[3] 7C136-25 7C142-25 7C146-25	7C132-30 7C136-30 7C142-30 7C146-30	7C132-35 7C136-35 7C142-35 7C146-35	7C132-45 7C136-45 7C142-45 7C146-45	7C132-55 7C136-55 7C142-55 7C146-55
Maximum Access Time (ns)		15	25	30	35	45	55
Maximum Operating Current (mA)	Com'l/Ind	190	170	170	120	90	90
Maximum Operating Current (mA)	Military				170	120	120
Maximum Standby Current (mA)	Com'l/Ind	75	65	65	45	35	35
Maximum Standby Current (mA)	Military				65	45	45

Notes:

- 15 and 25-ns version available in PQFP and PLCC packages only.
- Shaded area contains preliminary information.

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature -65°C to +150°C

Ambient Temperature with Power Applied..... -55°C to +125°C

Supply Voltage to Ground Potential (Pin 48 to Pin 24)..... -0.5V to +7.0V

DC Voltage Applied to Outputs in High Z State -0.5V to +7.0V

DC Input Voltage -3.5V to +7.0V

Output Current into Outputs (LOW) 20 mA

Static Discharge Voltage >2001V (per MIL-STD-883, Method 3015)

Latch-Up Current..... >200 mA

Operating Range

Range	Ambient Temperature	V _{CC}
Commercial	0°C to +70°C	5V ± 10%
Industrial	-40°C to +85°C	5V ± 10%
Military ^[5]	-55°C to +125°C	5V ± 10%

Note:

- T_A is the "instant on" case temperature.



CY7C132/CY7C136 CY7C142/CY7C146

Electrical Characteristics Over the Operating Range^[6]

Parameter	Description	Test Conditions	7C136-15 ^[3,4] 7C146-15		7C132-30 ^[3] 7C136-25,30 7C142-30 7C146-25,30		7C132-35 7C136-35 7C142-35 7C146-35		7C132-45,55 7C136-45,55 7C142-45,55 7C146-45,55		Unit
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
V _{OH}	Output HIGH Voltage	V _{CC} = Min., I _{OH} = -4.0 mA	2.4		2.4		2.4		2.4		V
V _{OL}	Output LOW Voltage	I _{OL} = 4.0 mA		0.4		0.4		0.4		0.4	V
		I _{OL} = 16.0 mA ^[7]		0.5		0.5		0.5		0.5	
V _{IH}	Input HIGH Voltage		2.2		2.2		2.2		2.2		V
V _{IL}	Input LOW Voltage			0.8		0.8		0.8		0.8	V
I _{Ix}	Input Load Current	GND ≤ V _I ≤ V _{CC}	-5	+5	-5	+5	-5	+5	-5	+5	μA
I _{OZ}	Output Leakage Current	GND ≤ V _O ≤ V _{CC} , Output Disabled	-5	+5	-5	+5	-5	+5	-5	+5	μA
I _{OS}	Output Short Circuit Current ^[8]	V _{CC} = Max., V _{OUT} = GND		-350		-350		-350		-350	mA
I _{CC}	V _{CC} Operating Supply Current	$\overline{CE} = V_{IL}$, Outputs Open, f = f _{MAX} ^[9]	Com'l	190		170		120		90	mA
			Mil					170		120	
I _{SB1}	Standby Current Both Ports, TTL Inputs	$\overline{CE}_L$ and $\overline{CE}_R \geq V_{IH}$, f = f _{MAX} ^[9]	Com'l	75		65		45		35	mA
			Mil					65		45	
I _{SB2}	Standby Current One Port, TTL Inputs	$\overline{CE}_L$ or $\overline{CE}_R \geq V_{IH}$, Active Port Outputs Open, f = f _{MAX} ^[9]	Com'l	135		115		90		75	mA
			Mil					115		90	
I _{SB3}	Standby Current Both Ports, CMOS Inputs	Both Ports $\overline{CE}_L$ and $\overline{CE}_R \geq V_{CC} - 0.2V$, V _{IN} ≥ V _{CC} - 0.2V or V _{IN} ≤ 0.2V, f = 0	Com'l	15		15		15		15	mA
			Mil					15		15	
I _{SB4}	Standby Current One Port, CMOS Inputs	One Port $\overline{CE}_L$ or $\overline{CE}_R \geq V_{CC} - 0.2V$, V _{IN} ≥ V _{CC} - 0.2V or V _{IN} ≤ 0.2V, Active Port Outputs Open, f = f _{MAX} ^[9]	Com'l	125		105		85		70	mA
			Mil					105		85	

Capacitance^[10]

Parameter	Description	Test Conditions	Max.	Unit
C _{IN}	Input Capacitance	T _A = 25°C, f = 1 MHz, V _{CC} = 5.0V	15	pF
C _{OUT}	Output Capacitance		10	pF




Notes:

- See the last page of this specification for Group A subgroup testing information.
- BUSY and INT pins only.
- Duration of the short circuit should not exceed 30 seconds.
- At f = f_{MAX}, address and data inputs are cycling at the maximum frequency of read cycle of 1/t_{rc} and using AC Test Waveforms input levels of GND to 3V.
- This parameter is guaranteed but not tested.



CY7C132/CY7C136 CY7C142/CY7C146


AC Test Loads and Waveforms

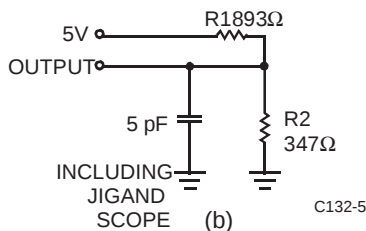

BUSY Output Load
(CY7C132/CY7C136 ONLY)

Equivalent to: THVENIN EQUIVALENT

OUTPUT — 250Ω — 1.4V

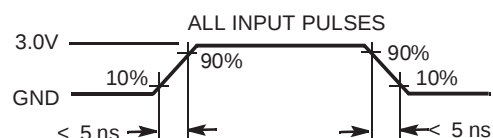

Switching Characteristics Over the Operating Range^[6, 11]

Parameter	Description	7C136-15 ^[3,4] 7C146-15		7C132-25 ^[3] 7C136-25 7C142-25 7C146-25		7C132-30 7C136-30 7C142-30 7C146-30		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
READ CYCLE								
t _{RC}	Read Cycle Time	15		25		30		ns
t _{AA}	Address to Data Valid ^[12]		15		25		30	ns
t _{OHA}	Data Hold from Address Change	0		0		0		ns
t _{ACE}	$\overline{CE}$ LOW to Data Valid ^[12]		15		25		30	ns
t _{DOE}	$\overline{OE}$ LOW to Data Valid ^[12]		10		15		20	ns
t _{LZOE}	$\overline{OE}$ LOW to Low Z ^[10, 13]	3		3		3		ns
t _{HZOE}	$\overline{OE}$ HIGH to High Z ^[10, 13, 14]		10		15		15	ns
t _{LZCE}	$\overline{CE}$ LOW to Low Z ^[10, 13]	3		5		5		ns
t _{HZCE}	$\overline{CE}$ HIGH to High Z ^[10, 13, 14]		10		15		15	ns
t _{PU}	$\overline{CE}$ LOW to Power-Up ^[10]	0		0		0		ns
t _{PD}	$\overline{CE}$ HIGH to Power-Down ^[10]		15		25		25	ns
WRITE CYCLE ^[15]								
t _{WC}	Write Cycle Time	15		25		30		ns
t _{SCE}	$\overline{CE}$ LOW to Write End	12		20		25		ns
t _{AW}	Address Set-Up to Write End	12		20		25		ns
t _{HA}	Address Hold from Write End	2		2		2		ns
t _{SA}	Address Set-Up to Write Start	0		0		0		ns
t _{PWE}	R/ $\overline{W}$ Pulse Width	12		15		25		ns
t _{SD}	Data Set-Up to Write End	10		15		15		ns
t _{HD}	Data Hold from Write End	0		0		0		ns
t _{HZWE}	R/ $\overline{W}$ LOW to High Z ^[10]		10		15		15	ns
t _{LZWE}	R/ $\overline{W}$ HIGH to Low Z ^[10]	0		0		0		ns



Switching Characteristics Over the Operating Range^[6, 11] (continued)

Parameter	Description	7C136-15 ^[3,4] 7C146-15		7C132-25 ^[3] 7C136-25 7C142-25 7C146-25		7C132-30 7C136-30 7C142-30 7C146-30		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
BUSY/INTERRUPT TIMING								
t _{BLA}	BUSY LOW from Address Match		15		20		20	ns
t _{BHA}	BUSY HIGH from Address Mismatch ^[16]		15		20		20	ns
t _{BLC}	BUSY LOW from CE LOW		15		20		20	ns
t _{BHC}	BUSY HIGH from CE HIGH ^[16]		15		20		20	ns
t _{PS}	Port Set Up for Priority	5		5		5		ns
t _{WB}	R/W LOW after BUSY LOW ^[17]	0		0		0		ns
t _{WH}	R/W HIGH after BUSY HIGH	13		20		30		ns
t _{BDD}	BUSY HIGH to Valid Data		15		25		30	ns
t _{DDD}	Write Data Valid to Read Data Valid		Note 18		Note 18		Note 18	ns
t _{WDD}	Write Pulse to Data Delay		Note 18		Note 18		Note 18	ns
INTERRUPT TIMING ^[19]								
t _{WINS}	R/W to INTERRUPT Set Time		15		25		25	ns
t _{EINS}	CE to INTERRUPT Set Time		15		25		25	ns
t _{INS}	Address to INTERRUPT Set Time		15		25		25	ns
t _{OINR}	OE to INTERRUPT Reset Time ^[16]		15		25		25	ns
t _{EINR}	CE to INTERRUPT Reset Time ^[16]		15		25		25	ns
t _{INR}	Address to INTERRUPT Reset Time ^[16]		15		25		25	ns

Switching Characteristics Over the Operating Range^[6, 11]

Parameter	Description	7C132-35 7C136-35 7C142-35 7C146-35		7C132-45 7C136-45 7C142-45 7C146-45		7C132-55 7C136-55 7C142-55 7C146-55		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
READ CYCLE								
t _{RC}	Read Cycle Time	35		45		55		ns
t _{AA}	Address to Data Valid ^[12]		35		45		55	ns
t _{OHA}	Data Hold from Address Change	0		0		0		ns
t _{ACE}	$\overline{CE}$ LOW to Data Valid ^[12]		35		45		55	ns
t _{DOE}	$\overline{OE}$ LOW to Data Valid ^[12]		20		25		25	ns
t _{LZOE}	$\overline{OE}$ LOW to Low Z ^[10, 13]	3		3		3		ns
t _{HZOE}	$\overline{OE}$ HIGH to High Z ^[10, 13, 14]		20		20		25	ns
t _{LZCE}	$\overline{CE}$ LOW to Low Z ^[10, 13]	5		5		5		ns
t _{HZCE}	$\overline{CE}$ HIGH to High Z ^[10, 13, 14]		20		20		25	ns
t _{PU}	$\overline{CE}$ LOW to Power-Up ^[10]	0		0		0		ns
t _{PD}	$\overline{CE}$ HIGH to Power-Down ^[10]		35		35		35	ns



Switching Characteristics Over the Operating Range^[6, 11] (continued)

		7C132-35 7C136-35 7C142-35 7C146-35	7C132-45 7C136-45 7C142-45 7C146-45	7C132-55 7C136-55 7C142-55 7C146-55	
WRITE CYCLE^[15]					
t _{WC}	Write Cycle Time	35	45	55	ns
t _{SCE}	$\overline{CE}$ LOW to Write End	30	35	40	ns
t _{AW}	Address Set-Up to Write End	30	35	40	ns
t _{HA}	Address Hold from Write End	2	2	2	ns
t _{SA}	Address Set-Up to Write Start	0	0	0	ns
t _{PWE}	R/ $\overline{W}$ Pulse Width	25	30	30	ns
t _{SD}	Data Set-Up to Write End	15	20	20	ns
t _{HD}	Data Hold from Write End	0	0	0	ns
t _{HZWE}	R/ $\overline{W}$ LOW to High Z ^[10]	20	20	25	ns
t _{LZWE}	R/ $\overline{W}$ HIGH to Low Z ^[10]	0	0	0	ns
BUSY/INTERRUPT TIMING					
t _{BLA}	$\overline{BUSY}$ LOW from Address Match	20	25	30	ns
t _{BHA}	$\overline{BUSY}$ HIGH from Address Mismatch ^[16]	20	25	30	ns
t _{BLC}	$\overline{BUSY}$ LOW from $\overline{CE}$ LOW	20	25	30	ns
t _{BHC}	$\overline{BUSY}$ HIGH from $\overline{CE}$ HIGH ^[16]	20	25	30	ns
t _{PS}	Port Set Up for Priority	5	5	5	ns
t _{WB}	R/ $\overline{W}$ LOW after $\overline{BUSY}$ LOW ^[17]	0	0	0	ns
t _{WH}	R/ $\overline{W}$ HIGH after $\overline{BUSY}$ HIGH	30	35	35	ns
t _{BDD}	$\overline{BUSY}$ HIGH to Valid Data	35	45	45	ns
t _{DDD}	Write Data Valid to Read Data Valid	Note 18	Note 18	Note 18	ns
t _{WDD}	Write Pulse to Data Delay	Note 18	Note 18	Note 18	ns
INTERRUPT TIMING^[19]					
t _{WINS}	R/ $\overline{W}$ to $\overline{INTERRUPT}$ Set Time	25	35	45	ns
t _{EINS}	$\overline{CE}$ to $\overline{INTERRUPT}$ Set Time	25	35	45	ns
t _{INS}	Address to $\overline{INTERRUPT}$ Set Time	25	35	45	ns
t _{OINR}	$\overline{OE}$ to $\overline{INTERRUPT}$ Reset Time ^[16]	25	35	45	ns
t _{EINR}	$\overline{CE}$ to $\overline{INTERRUPT}$ Reset Time ^[16]	25	35	45	ns
t _{INR}	Address to $\overline{INTERRUPT}$ Reset Time ^[16]	25	35	45	ns


Notes:

- Test conditions assume signal transition times of 5 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V and output loading of the specified I_{OL}/I_{OH} and 30-pF load capacitance.
- AC test conditions use V_{OH} = 1.6V and V_{OL} = 1.4V.
- At any given temperature and voltage condition for any given device, t_{HZCE} is less than t_{LZCE} and t_{HZOE} is less than t_{LZOE}.
- t_{LZCE}, t_{LZWE}, t_{HZOE}, t_{LZOE}, t_{HZCE}, and t_{HZWE} are tested with C_L = 5pF as in part (b) of AC Test Loads. Transition is measured ±500 mV from steady-state voltage.
- The internal write time of the memory is defined by the overlap of $\overline{CE}$ LOW and R/ $\overline{W}$ LOW. Both signals must be LOW to initiate a write and either signal can terminate a write by going HIGH. The data input setup and hold timing should be referenced to the rising edge of the signal that terminates the write.
- These parameters are measured from the input signal changing, until the output pin goes to a high-impedance state.
- CY7C142/CY7C146 only.
- A write operation on Port A, where Port A has priority, leaves the data on Port B's outputs undisturbed until one access time after one of the following:
BUSY on Port B goes HIGH.
Port B's address toggled.
 $\overline{CE}$ for Port B is toggled.
R/ $\overline{W}$ for Port B is toggled during valid read.
- 52-pin PLCC and PQFP versions only.




Switching Waveforms

Read Cycle No. 1 (Either Port-Address Access)^[20, 21]

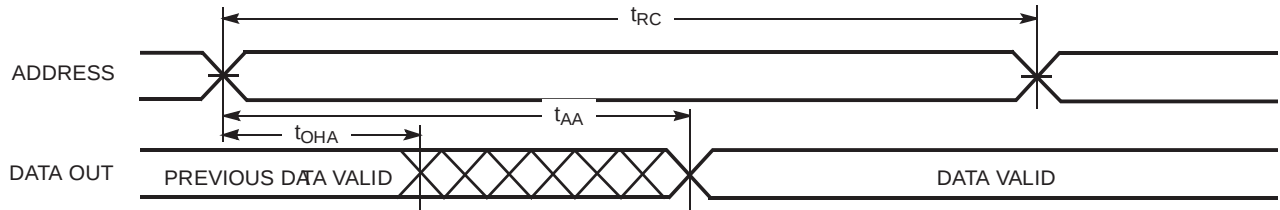


C132-7

Read Cycle No. 2 (Either Port- $\overline{CE}/\overline{OE}$)^[20, 22]

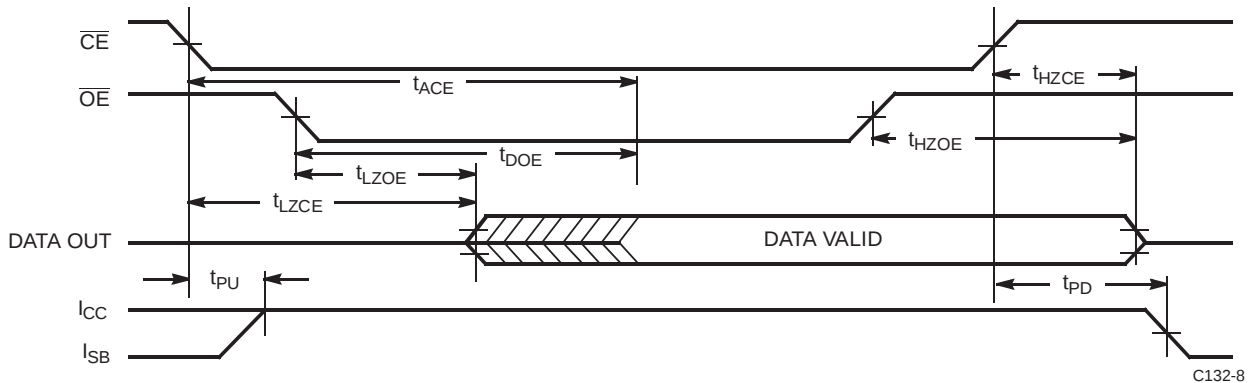

C132-8


Read Cycle No. 3 (Read with $\overline{BUSY}$ Master: CY7C132 and CY7C136)

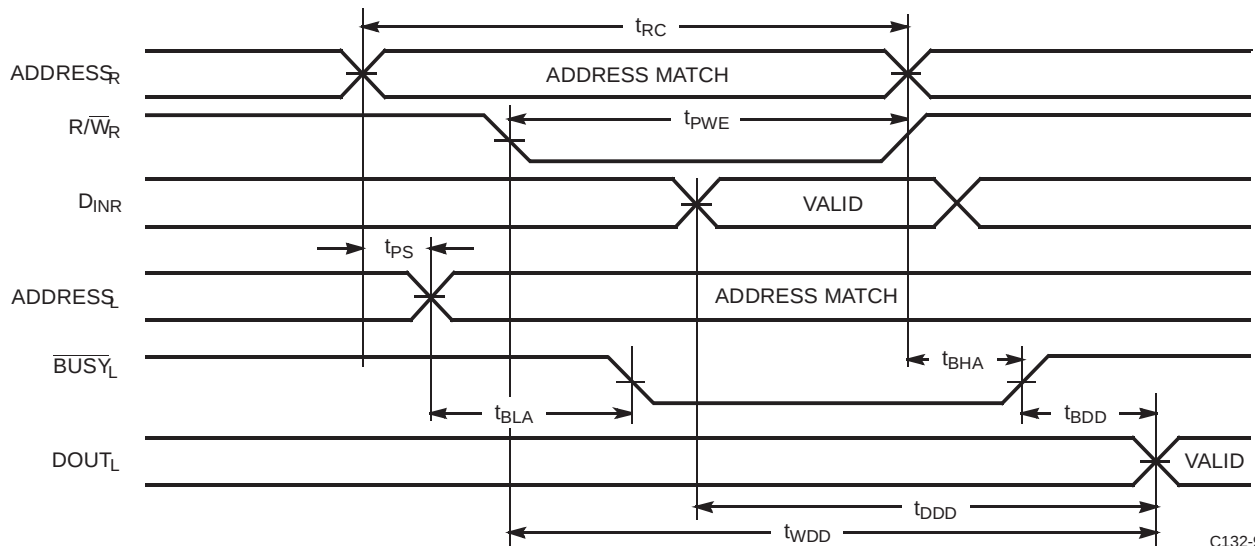


C132-9

Notes:

20. $R/\overline{W}$ is HIGH for read cycle.
21. Device is continuously selected, $\overline{CE} = V_{IL}$ and $\overline{OE} = V_{IL}$.
22. Address valid prior to or coincident with $\overline{CE}$ transition LOW.

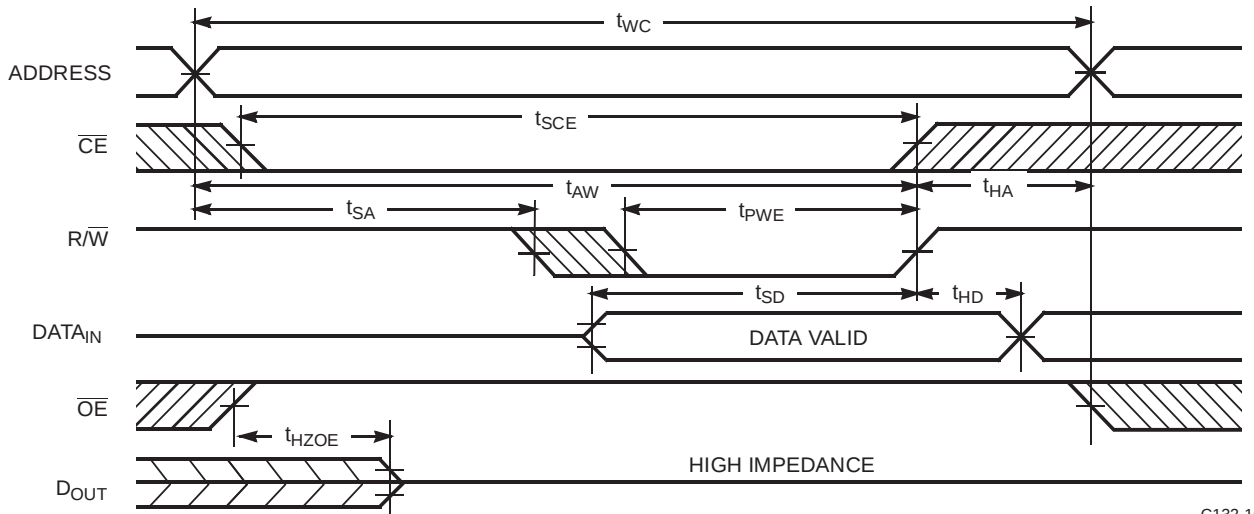Switching Waveforms (continued)
Write Cycle No.1 ($\overline{OE}$ Three-States Data I/Os-Either Port)^[15, 23]


C132-10

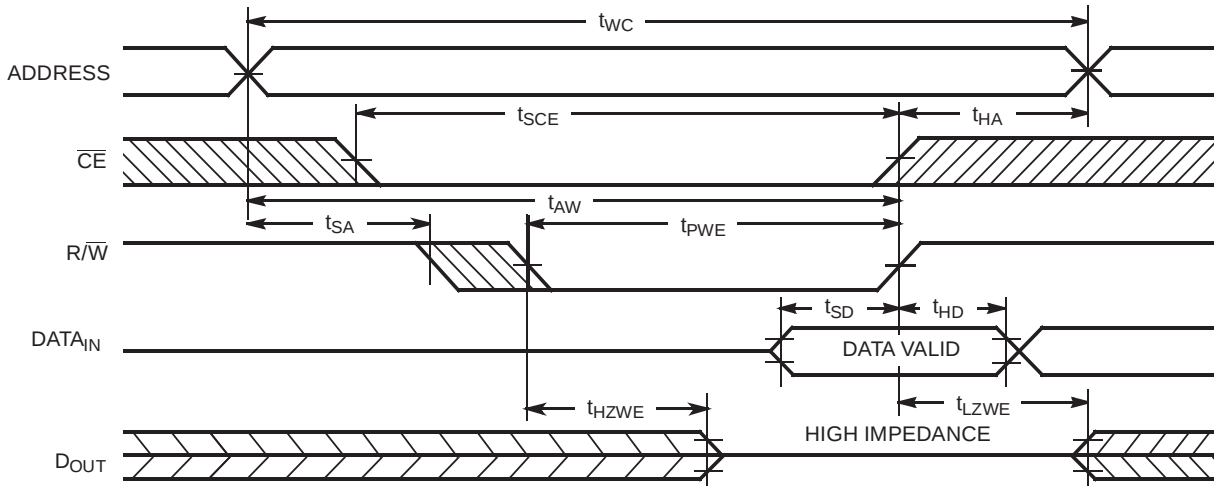Write Cycle No. 2 ($R/\overline{W}$ Three-States Data I/Os-Either Port)^[15, 24]


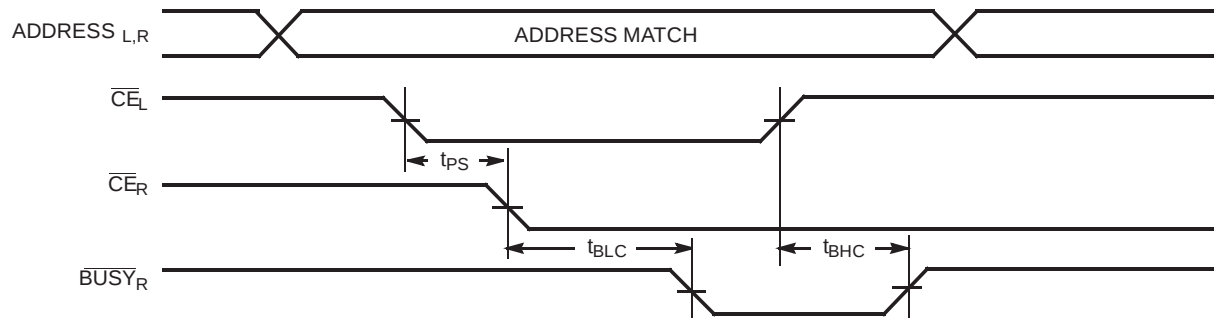
C132-11

Notes:

23. If $\overline{OE}$ is LOW during a $R/\overline{W}$ controlled write cycle, the write pulse width must be the larger of t_{PWE} or $t_{HZWE} + t_{SD}$ to allow the data I/O pins to enter high impedance and for data to be placed on the bus for the required t_{SD} .
24. If the $\overline{CE}$ LOW transition occurs simultaneously with or after the $R/\overline{W}$ LOW transition, the outputs remain in a high-impedance state.


Switching Waveforms (continued)
Busy Timing Diagram No. 1 ($\overline{CE}$ Arbitration)

$\overline{CE}_L$ Valid First:



C132-12


$\overline{CE}_R$ Valid First:

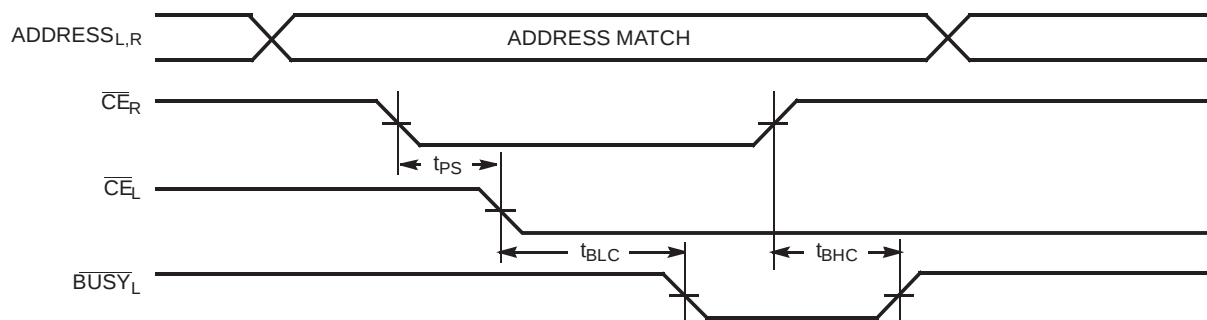

C132-13


Busy Timing Diagram No. 2 (Address Arbitration)

Left Address/Valid First:

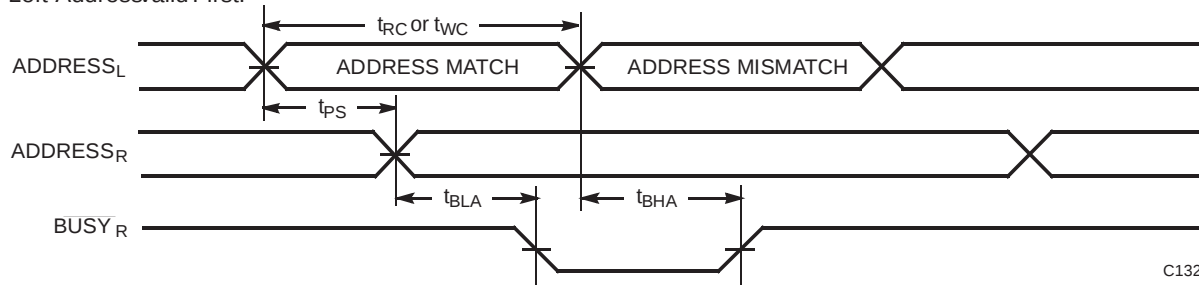

C132-14

Right Address Valid First:

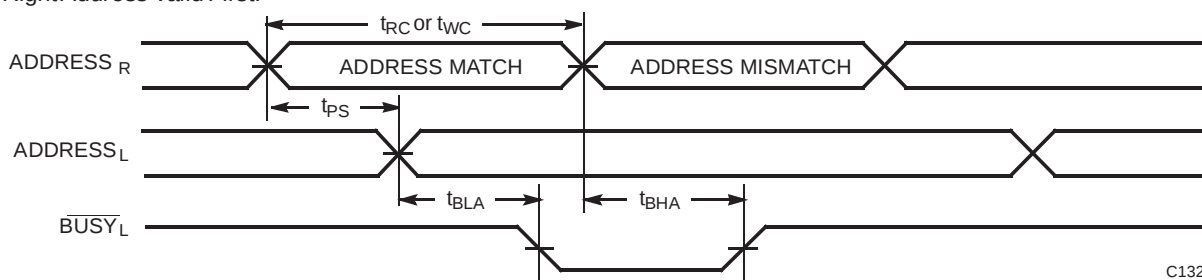


C132-15



Switching Waveforms (continued)


Busy Timing Diagram No. 3 (Write with $\overline{\text{BUSY}}$, Slave: CY7C142/CY7C146)

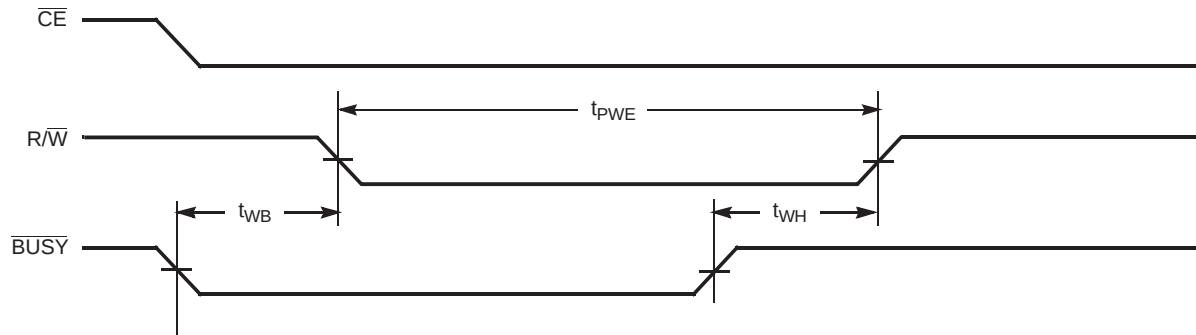

C132-16


Interrupt Timing Diagrams^[19]

Left Side Sets $\overline{\text{INT}}_{\text{R}}$:

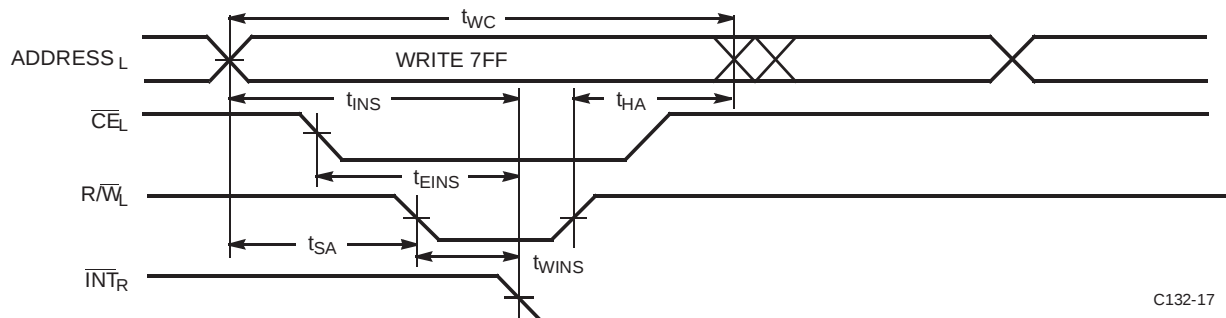

C132-17

Right Side Clears $\overline{\text{INT}}_{\text{R}}$:

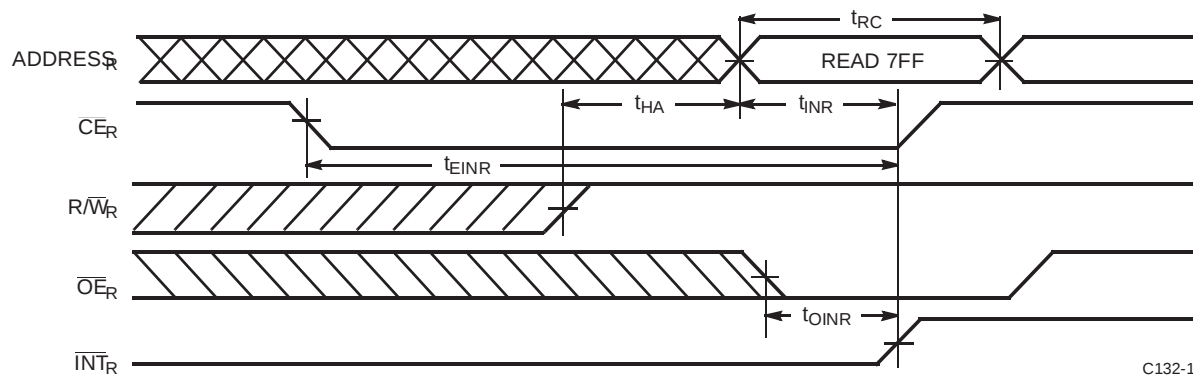


C132-18




Interrupt Timing Diagrams^[19] (continued)

Right Side Sets $\overline{\text{INT}}_L$:

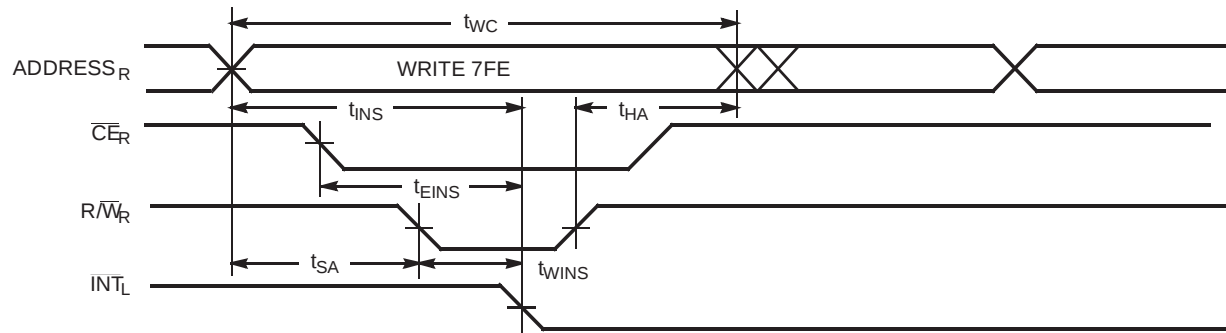

C132-19










Right Side Clears $\overline{\text{INT}}_L$:

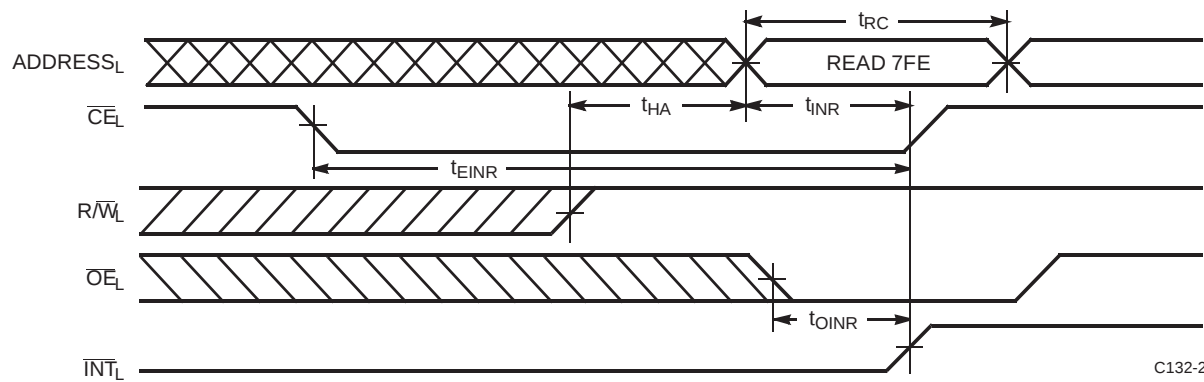

C132-20



Typical DC and AC Characteristics

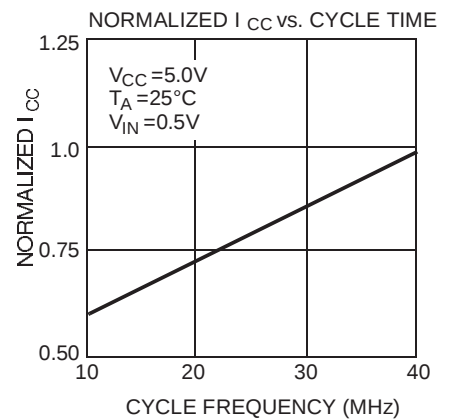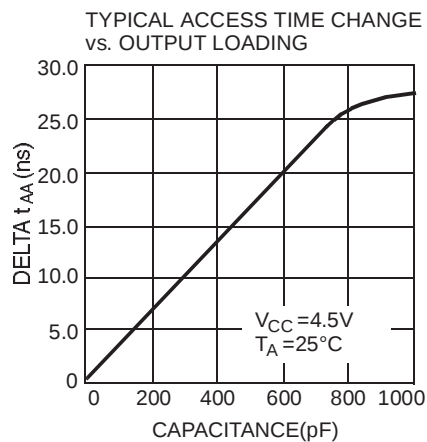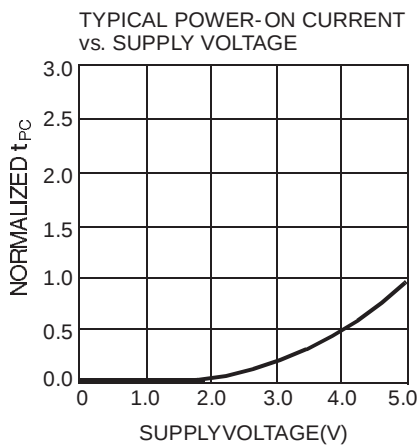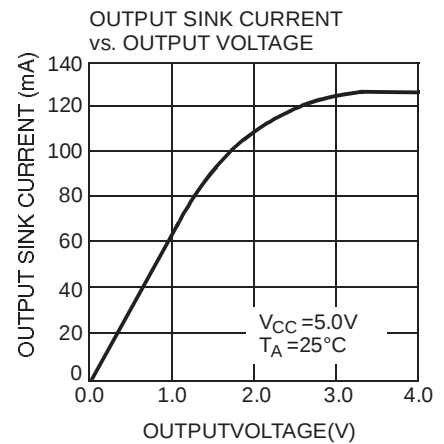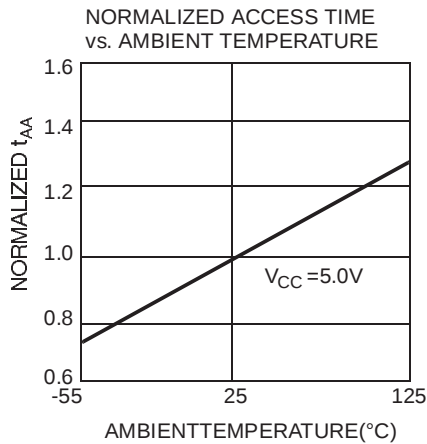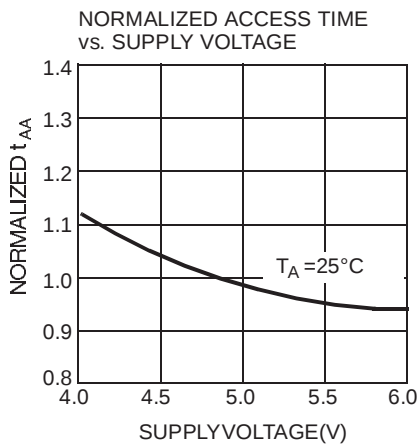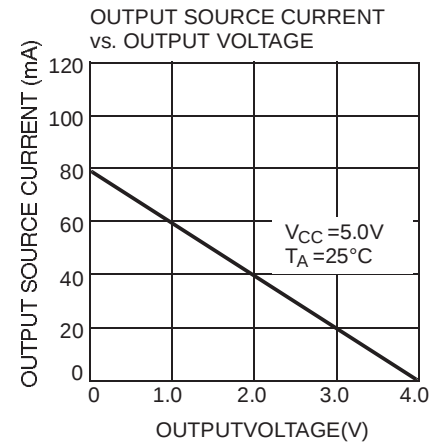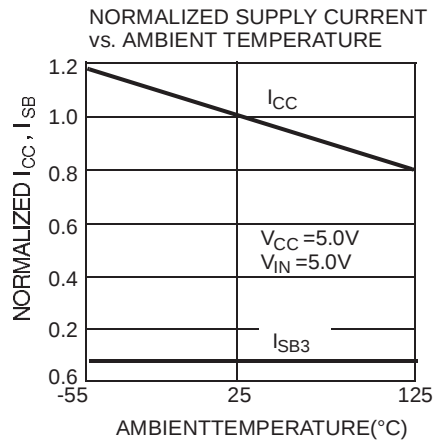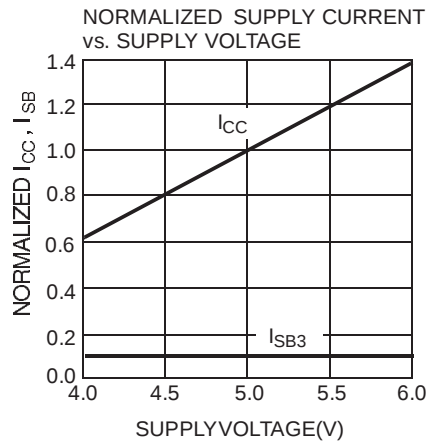



CY7C132/CY7C136 CY7C142/CY7C146

Ordering Information

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
30	CY7C132-30PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C132-30PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
35	CY7C132-35PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C132-35PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
	CY7C132-35DMB	D26	48-Lead (600-Mil) Sidebrazed DIP	Military
45	CY7C132-45PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C132-45PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
	CY7C132-45DMB	D26	48-Lead (600-Mil) Sidebrazed DIP	Military
55	CY7C132-55PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C132-55PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
	CY7C132-55DMB	D26	48-Lead (600-Mil) Sidebrazed DIP	Military
Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
15	CY7C136-15JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-15NC	N52	52-Pin Plastic Quad Flatpack	
25	CY7C136-25JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-25NC	N52	52-Pin Plastic Quad Flatpack	
30	CY7C136-30JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-30NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C136-30JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
35	CY7C136-35JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-35NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C136-35JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
	CY7C136-35LMB	L69	52-Square Leadless Chip Carrier	Military
45	CY7C136-45JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-45NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C136-45JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
	CY7C136-45LMB	L69	52-Square Leadless Chip Carrier	Military
55	CY7C136-55JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-55NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C136-55JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
	CY7C136-55LMB	L69	52-Square Leadless Chip Carrier	Military

Shaded area contains preliminary information.



CY7C132/CY7C136 CY7C142/CY7C146

Ordering Information (continued)

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
30	CY7C142-30PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C142-30PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
35	CY7C142-35PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C142-35PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
	CY7C142-35DMB	D26	48-Lead (600-Mil) Sidebrazed DIP	Military
45	CY7C142-45PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C142-45PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
	CY7C142-45DMB	D26	48-Lead (600-Mil) Sidebrazed DIP	Military
55	CY7C142-55PC	P25	48-Lead (600-Mil) Molded DIP	Commercial
	CY7C142-55PI	P25	48-Lead (600-Mil) Molded DIP	Industrial
	CY7C142-55DMB	D26	48-Lead (600-Mil) Sidebrazed DIP	Military
Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
15	CY7C136-15JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C136-15NC	N52	52-Pin Plastic Quad Flatpack	
25	CY7C146-25JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C146-25NC	N52	52-Pin Plastic Quad Flatpack	
30	CY7C146-30JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C146-30NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C146-30JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
35	CY7C146-35JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C146-35NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C146-35JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
	CY7C146-35LMB	L69	52-Square Leadless Chip Carrier	Military
45	CY7C146-45JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C146-45NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C146-45JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
	CY7C146-45LMB	L69	52-Square Leadless Chip Carrier	Military
55	CY7C146-55JC	J69	52-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C146-55NC	N52	52-Pin Plastic Quad Flatpack	
	CY7C146-55JI	J69	52-Lead Plastic Leaded Chip Carrier	Industrial
	CY7C146-55LMB	L69	52-Square Leadless Chip Carrier	Military

Shaded area contains preliminary information.



MILITARY SPECIFICATIONS

Group A Subgroup Testing

DC Characteristics

Parameter	Subgroups
V_{OH}	1, 2, 3
V_{OL}	1, 2, 3
V_{IH}	1, 2, 3
V_{IL} Max.	1, 2, 3
I_{IX}	1, 2, 3
I_{OZ}	1, 2, 3
I_{CC}	1, 2, 3
I_{SB1}	1, 2, 3
I_{SB2}	1, 2, 3
I_{SB3}	1, 2, 3
I_{SB4}	1, 2, 3

Switching Characteristics

Parameter	Subgroups
READ CYCLE	
t_{RC}	7, 8, 9, 10, 11
t_{AA}	7, 8, 9, 10, 11
t_{ACE}	7, 8, 9, 10, 11
t_{DOE}	7, 8, 9, 10, 11
WRITE CYCLE	
t_{WC}	7, 8, 9, 10, 11
t_{SCE}	7, 8, 9, 10, 11
t_{AW}	7, 8, 9, 10, 11
t_{HA}	7, 8, 9, 10, 11
t_{SA}	7, 8, 9, 10, 11
t_{PWE}	7, 8, 9, 10, 11
t_{SD}	7, 8, 9, 10, 11
t_{HD}	7, 8, 9, 10, 11
BUSY/INTERRUPT TIMING	
t_{BLA}	7, 8, 9, 10, 11
t_{BHA}	7, 8, 9, 10, 11
t_{BLC}	7, 8, 9, 10, 11
t_{BHC}	7, 8, 9, 10, 11
t_{PS}	7, 8, 9, 10, 11
t_{WINS}	7, 8, 9, 10, 11
t_{EINS}	7, 8, 9, 10, 11
t_{INS}	7, 8, 9, 10, 11
t_{OINR}	7, 8, 9, 10, 11
t_{EINR}	7, 8, 9, 10, 11
t_{INR}	7, 8, 9, 10, 11
BUSY TIMING	
$t_{WB}^{[25]}$	7, 8, 9, 10, 11
t_{WH}	7, 8, 9, 10, 11
t_{BDD}	7, 8, 9, 10, 11

Note:


25. CY7C142/CY7C146 only.

Document #: 38-00061-K




Package Diagrams

48-Lead (600-Mil) Sidebrazed DIP D26

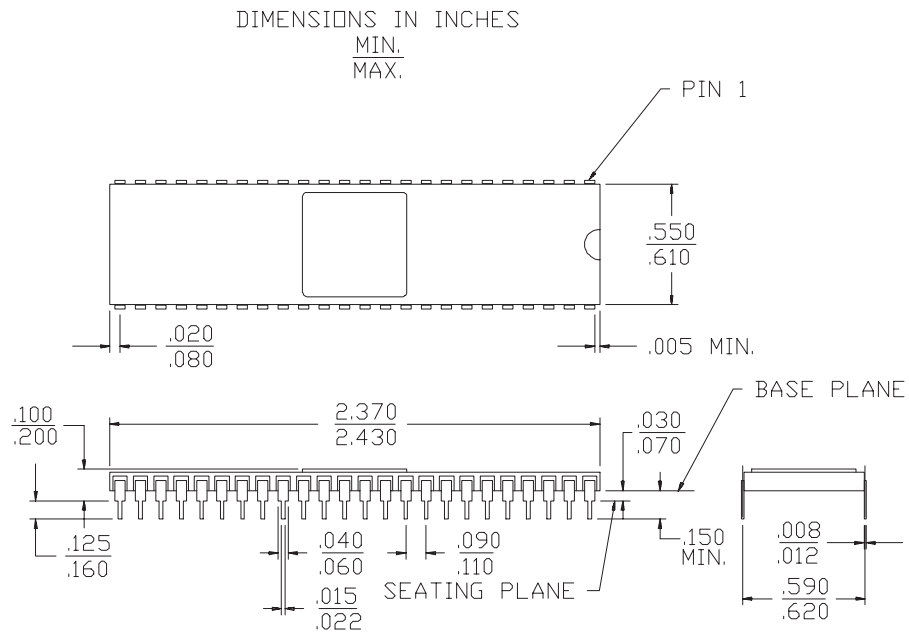

52-Lead Plastic Leaded Chip Carrier J69

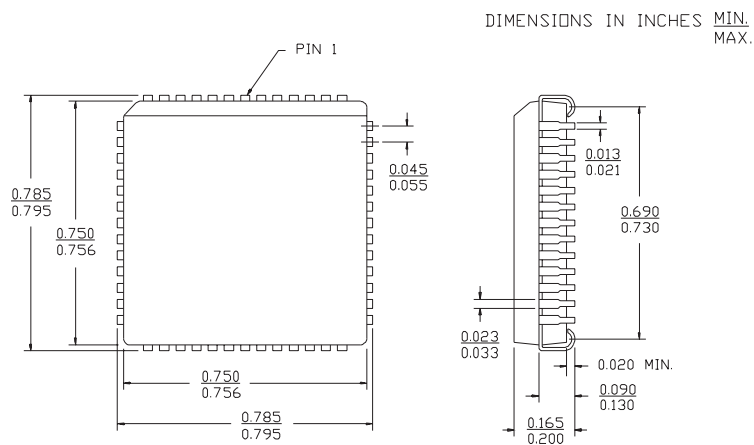





CY7C132/CY7C136
CY7C142/CY7C146

Package Diagrams (continued)


52-Square Leadless Chip Carrier L69

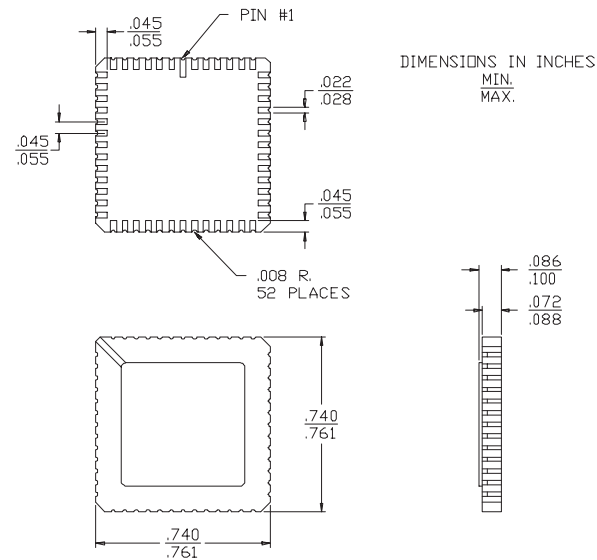

52-Lead Plastic Quad Flatpack N52

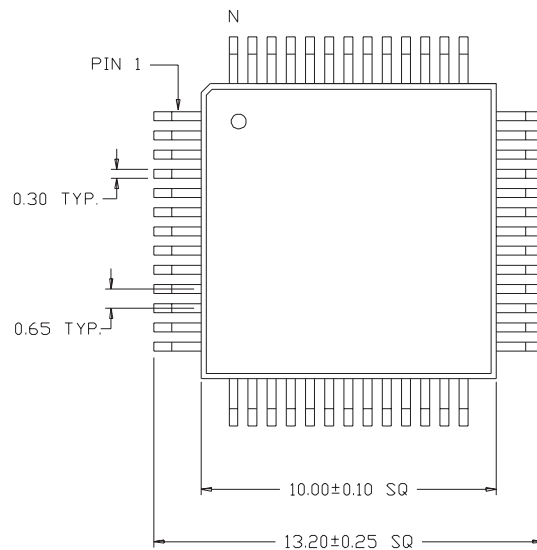

DIMENSIONS ARE IN MILLIMETERS
LEAD COPLANARITY 0.102 MAX.

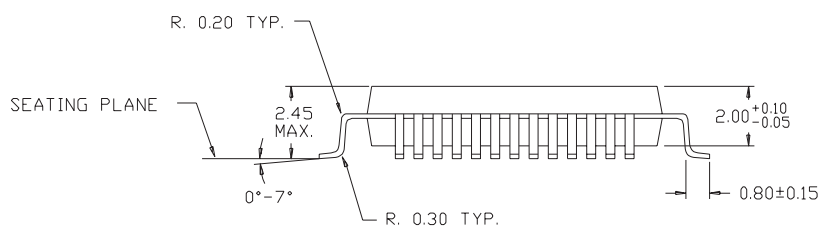



CY7C132/CY7C136 CY7C142/CY7C146

Package Diagrams (continued)

48-Lead (600-Mil) Molded DIP P25

