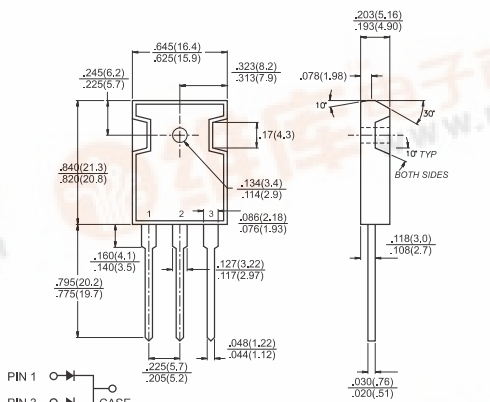


	MBR6050PT THRU MBR60100PT 60.0 AMPS. Schottky Barrier Rectifiers				
		Voltage Range 50 to 100 Volts Current 60.0 Amperes			
Features - Plastic material used carries Underwriters Laboratory Classifications 94V-0 - Metal silicon rectifier, majority carrier conduction - Low power loss, high efficiency - High current capability, low forward voltage drop - High surge capability - For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications - Guardring for overvoltage protection - High temperature soldering guaranteed: 260°C/10 seconds,0.17"(4.3mm)from case		TO-3P/TO-247AD  Dimensions in inches and (millimeters)			
Mechanical Data - Cases: JEDEC TO-3P/TO-247AD molded plastic body - Terminals: Leads solderable per MIL-STD-750, Method 2026 - Polarity: As marked - Mounting position: Any - Mounting torque: 10 in. - lbs. max - Weight: 0.2 ounce, 5.6 grams					
Maximum Ratings and Electrical Characteristics Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%					
Type Number	Symbol	MBR6050PT	MBR6060PT	MBR60100PT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	60	100	V
Maximum RMS Voltage	V_{RMS}	35	42	70	V
Maximum DC Blocking Voltage	V_{DC}	50	60	100	V
Maximum Average Forward Rectified Current at $T_c=125^{\circ}\text{C}$	$I_{(AV)}$	60			A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz) at $T_c=120^{\circ}\text{C}$	I_{FRM}	60.0			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	500			A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1.0			A
Maximum Instantaneous Forward Voltage at (Note 2) $I_F=30\text{A}$, $T_c=25^{\circ}\text{C}$ $I_F=30\text{A}$, $T_c=125^{\circ}\text{C}$	V_F	0.72 0.62			V
Maximum Instantaneous Reverse Current @ $T_c=25^{\circ}\text{C}$ at Rated DC Blocking voltage Per Leg @ $T_c=125^{\circ}\text{C}$ (Note 1)	I_R	1.0 100.0			mA mA
Voltage Rate of Change at (Rated V_R)	dV/dt	1,000			V/ μS
Typical Thermal Resistance Per Leg (Note 3)	$R_{\theta JC}$	1.2			$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-65 to +150			$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +175			$^{\circ}\text{C}$

Notes: 1. 2.0us Pulse Width, f=1.0 KHz
 2. Pulse Test: 300us Pulse Width, 1% Duty Cycle
 3. Thermal Resistance from Junction to Case Per Leg

RATINGS AND CHARACTERISTIC CURVES (MBR6050PT THRU MBR60100PT)

FIG.1- FORWARD CURRENT DERATING CURVE

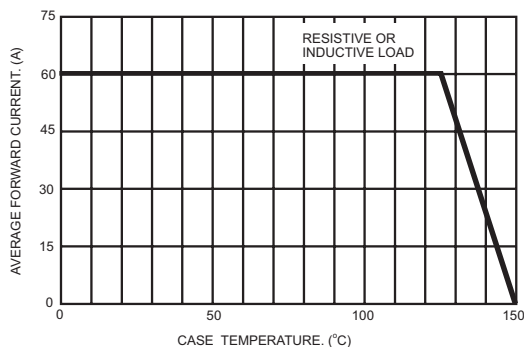


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

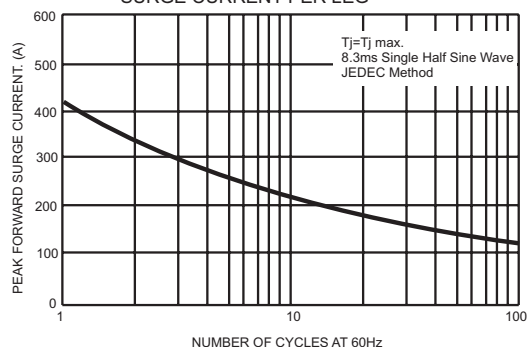


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

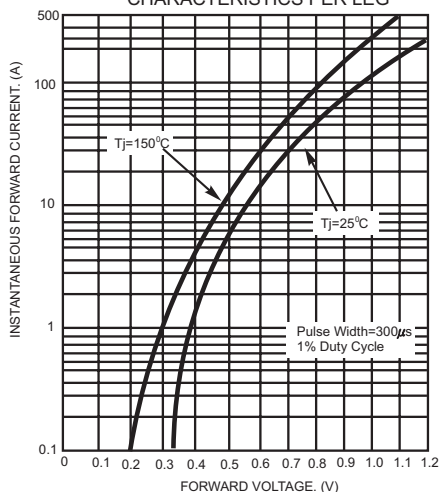


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

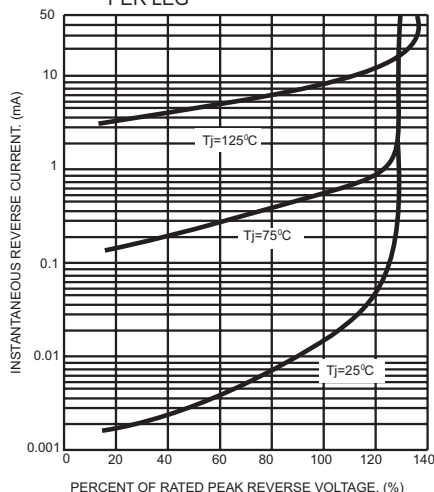


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

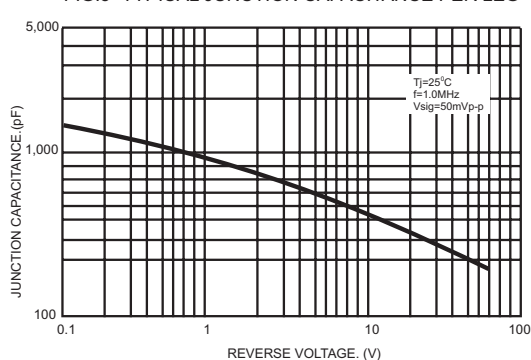


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

