


3M™ Round Conductor Flat Cable

.025" 30 AWG Solid, TPE

3749 Series

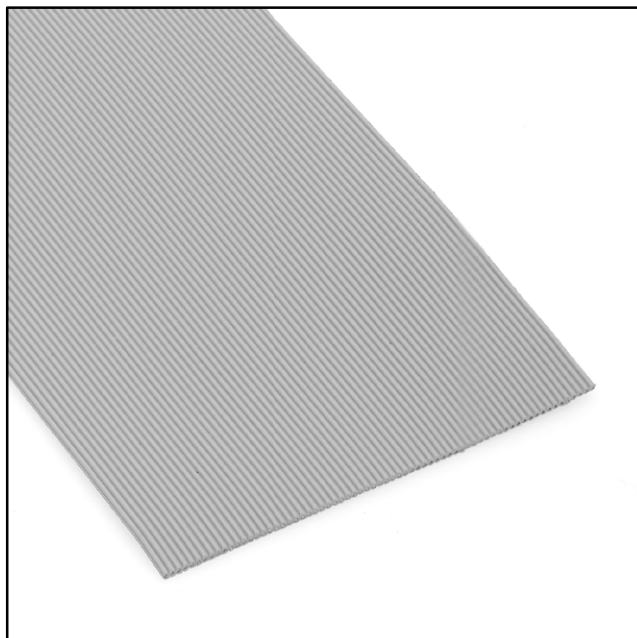

- Close spacing permits higher signal density
- TPE insulation provides excellent transmission properties
- 30 AWG solid conductors on .025 inch spacing allows for mass termination
- Zippable for branching or discrete termination
- Meets SCSI-3 Fast-20 characteristic impedance requirements

Date Modified: May 30, 2003

TS-0068-15
Sheet 1 of 2

Physical

Insulation

Material: Thermoplastic Elastomer (TPE)

Color: Gray

Marking

Standard: None

Canadian Option:  AWM 20297 105C 150V VW1 3M NU  AWM IA 105C 150V FT1
EU <50V

Conductors: 30 AWG [0.254] Tinned Solid Copper

Electrical

Voltage Rating: USA: 150 V Canada: 150V EU: <50V

Insulation Resistance: $> 1 \times 10^{10} \Omega/10 \text{ ft. [3m]}$

Characteristic Impedance: Unbalanced: 90 Ω

Capacitance: Unbalanced: 16.5 pF/ft. [54.1 pF/m]

Inductance: Unbalanced: .13 $\mu\text{H/ft. [0.43 } \mu\text{H/m]}$

Propagation Delay: Unbalanced: 1.48 ns/ft. [4.86 ns/m]

Velocity of Propagation: Unbalanced: 69%

Note: Unbalanced is measured between ground-signal-ground conductors.

Environmental

Temperature Rating: -40°C to +105°C

Flammability Rating: USA: VW-1 Canada: FT1

UL File No.: E42769, Style No.: 20297

3M

Interconnect Solutions

<http://www.3M.com/interconnects/>

3M is a trademark of 3M Company.

For technical, sales or ordering information call

800-225-5373


3M™ Round Conductor Flat Cable

.025" 30 AWG Solid, TPE

3749 Series



Number of Conductors	3M Part Number	Dimension A	Dimension B
20	3749/20	0.500 ± .006 [12.70]	0.475 ± .004 [12.07]
26	3749/26	0.650 ± .006 [16.51]	0.625 ± .004 [15.88]
34	3749/34	0.850 ± .009 [21.59]	0.825 ± .006 [20.96]
36	3749/36	0.900 ± .009 [22.86]	0.875 ± .006 [22.23]
40	3749/40	1.000 ± .009 [25.40]	0.975 ± .006 [24.77]
50	3749/50	1.250 ± .009 [31.75]	1.225 ± .006 [31.12]
60	3749/60	1.500 ± .012 [38.10]	1.475 ± .009 [37.47]
68	3749/68	1.700 ± .012 [43.18]	1.675 ± .009 [42.55]
80	3749/80	2.000 ± .015 [50.80]	1.975 ± .011 [50.17]
100	3749/100	2.500 ± .015 [63.50]	2.475 ± .012 [62.87]

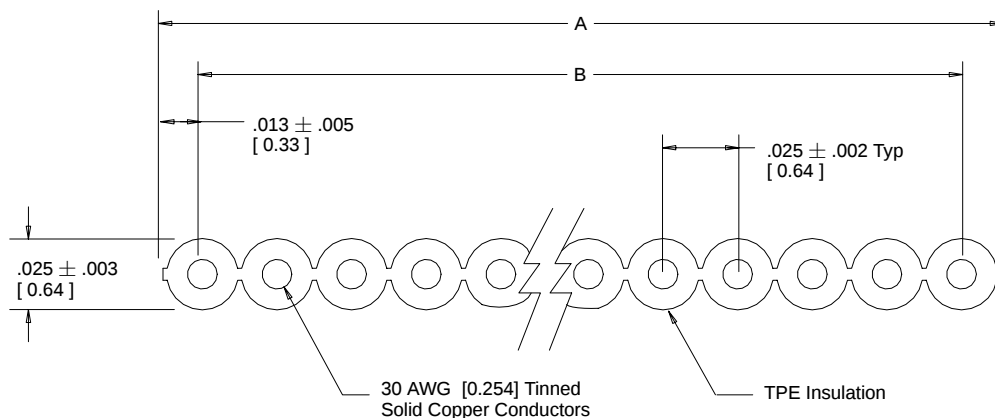

Note:

1. Blue marking on one edge of cable designates wire #1.

Inch
[mm]

Tolerance Unless Noted			
	.0	.00	.000
Inch	±.1	±.01	±.005

[] Dimensions for Reference only

Ordering Information

3749/XX

Blank = Standard
C = Canadian Certified Version

Number of Conductors
(See Table)

Note:

2. Available in standard lengths of 100 feet or 300 feet per roll, please specify when ordering.

TS-0068-15
Sheet 2 of 2

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



Electronic and Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000
www.3M.com/eisd

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 1 year from the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**