

RECTIFIER ASSEMBLIES

Single Phase Bridges, 7.5 Amp, Standard and Fast Recovery

捷多邦, 697, 698 SERIES 24小时加急出货

3

FEATURES

- Miniature High Current Assemblies
- Continuous Ratings: to 7.5A
- Surge Ratings: to 80A
- PIV's: from 100V to 600V
- Recovery Times: to 500ns
- Only Fused-in-Glass Diodes Used
- Controlled Avalanche Characteristics



DESCRIPTION

These miniature molded high-current single-phase bridges are designed for universal application in power supplies. One basic bridge fills current requirements up to 7.5A, with PIV's from 100 to 600 volts and recovery times of standard, and 500ns max.

ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	100 to 600V
Maximum Average D.C. Output Current	See Electrical Specifications
Non-Repetitive Sinusoidal Surge (8.3ms)	See Electrical Specifications
Operating and Storage Temperature Range	-65°C to +150°C
Thermal Resistance Junction to Ambient	32°C/W
Junction to Case	10°C/W

MECHANICAL SPECIFICATIONS

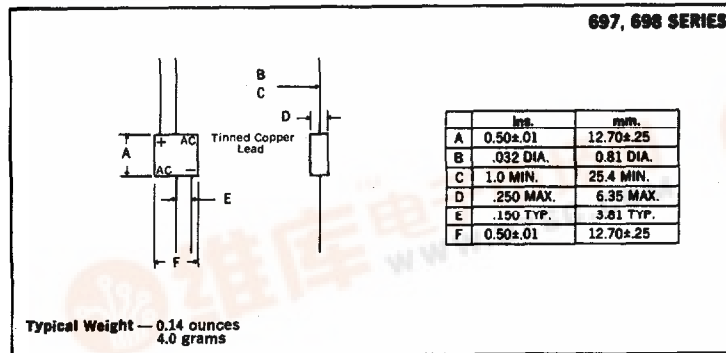

MARKING




Alternating Current Input	A.C.
Cathode — Positive Output	+
Anode — Negative	-

Part number is printed on the body.

Microsemi Corp.
Watertown
The diode experts

Electrical Specifications (at 25°C unless noted)						Maximum Ratings		
Type	PIV Per Leg	Maximum Forward Voltage Drop Per Leg	Leakage Current Per Leg @ PIV		Maximum Reverse Recovery Time†	Maximum Average D.C. Output Current		Non-Repetitive Sinusoidal Surge (8.3ms)
			T _A = 25°C	T _A = 100°C		T _A = 25°C	T _C = 55°C	
	Volts		μA	μA	ns	Amps	Amps	Amps
Standard Recovery	697-1	100	1.0V @ 2A	5		2.5	7.5	80
	697-2	200						
	697-3	300						
	697-4	400						
	697-5	500						
	697-6	600						
Fast Recovery	698-1	100	1.1V @ 2A	5	500	2.25	7.0	70
	698-2	200						
	698-3	300						
	698-4	400						
	698-5	500						
	698-6	600						

†Measured in a reverse recovery circuit switching from 1A forward to 1A reverse current recovering to .5A.

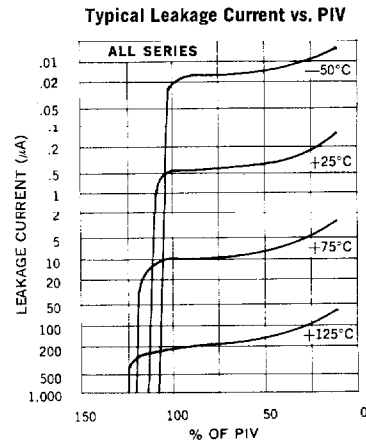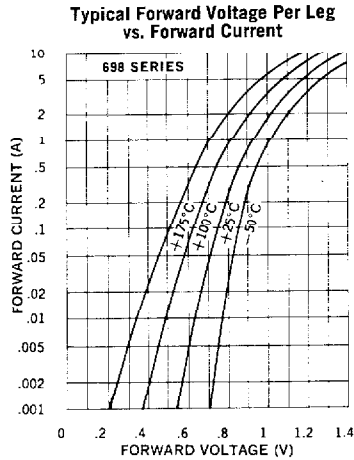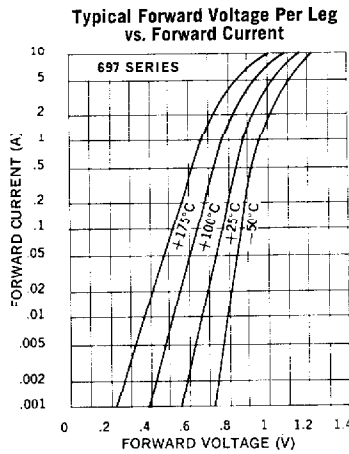

Reverse Recovery Circuit

