

FEATURES

- Guaranteed Temperature Stability
- Maximum 0.6Ω Dynamic Impedance
- Adjustable for Minimum Temperature Coefficient
- Wide Operating Current Range

DESCRIPTION

The LM136-2.5 is a general purpose shunt regulator diode designed to operate over a wide current range while maintaining good stability with time and temperature. The third terminal allows either the temperature coefficient to be minimized or the reference voltage to be adjusted without changing the temperature coefficient. Because it operates as a shunt regulator it can be used equally well as a positive or negative reference.

APPLICATIONS


- Reference for 5V Systems
- 8 Bit A/D and D/A Reference
- Digital Voltmeters
- Current Loop Measurement and Control Systems
- Power Supply Monitor

3


The LM136-2.5 is available with initial tolerances as low as 1% in either a TO-46 metal can for hermetic requirements or a low cost TO-92 plastic package.

Linear's advanced design, test and process techniques have optimized the LM136-2.5 to achieve superior performance and reliability over previous designs. For more demanding precision reference applications requiring very low initial tolerance and temperature coefficients, consult the LT1009 data sheet. A typical 2.5 Volt reference with trim is shown below.

2.5 Volt Reference

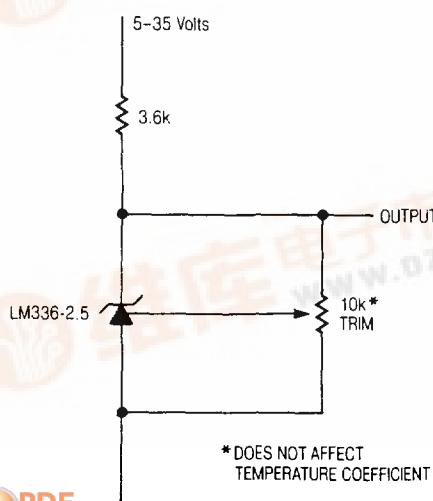

Reverse Voltage Change



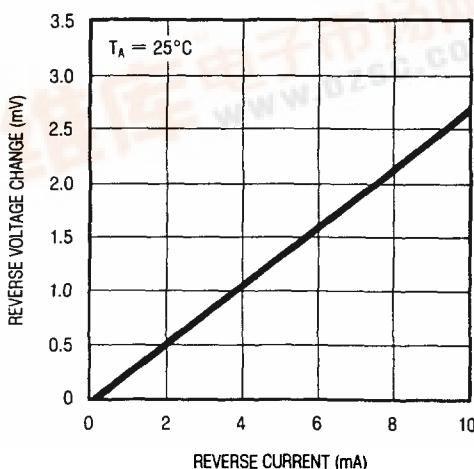


LM136-2.5/LM336-2.5

ABSOLUTE MAXIMUM RATINGS

Reverse Current	15mA
Forward Current.....	10mA
Operating Temperature Range	
LM136-2.5	-55°C to 125°C
LM336-2.5	0°C to 70°C
Storage Temperature Range	
LM136-2.5	-65°C to 150°C
LM336-2.5	-65°C to 150°C
Lead Temperature (Soldering, 10 sec.).....	300°C

PACKAGE/ORDER INFORMATION


 H PACKAGE	LM136H-2.5
	LM136AH-2.5
 Z PACKAGE	LM336H-2.5
	LM336BH-2.5
* SEE NOTE 1	
 Z PACKAGE	LM336Z-2.5
	LM336BZ-2.5
* SEE NOTE 1	

ELECTRICAL CHARACTERISTICS (See Note 1)

SYMBOL	PARAMETER	CONDITIONS	LM136A/LM136			LM336B/LM336			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V _Z	Reverse Breakdown Voltage	T _A = 25°C, I _R = 1mA LM136/LM336 LM136A/LM336B	2.440	2.490	2.540	2.390	2.490	2.590	V
			2.465	2.490	2.515	2.440	2.490	2.540	V
$\frac{\Delta V_Z}{\Delta I_R}$	Reverse Breakdown Change with Current	400μA ≤ I _R ≤ 10mA T _A = 25°C T _{min} ≤ T _A ≤ T _{max}	●	2.6 3	6 10	2.6 3	10 12	mV mV	
r _Z	Reverse Dynamic Impedance	I _R = 1mA T _A = 25°C T _{min} ≤ T _A ≤ T _{max}	●	0.2 0.4	0.6 1	0.2 0.4	1.0 1.4	Ω Ω	
$\frac{\Delta V_Z}{\Delta \text{Temp}}$	Temperature Stability	V _R adjusted to 2.490V, I _R = 1mA T _{min} ≤ T _A ≤ T _{max} LM136A/LM136 LM336B/LM336 (See Figure 1.)	● ●	12 18		1.8 6		mV mV	
$\frac{\Delta V_Z}{\Delta \text{Time}}$	Long Term Stability	T _A = 25°C ± 0.1°C, I _R = 1mA		20		20		ppm/kHr	

The ● denotes the specifications which apply over full operating temperature range.

Adjusting the LM336 for minimum temperature coefficient

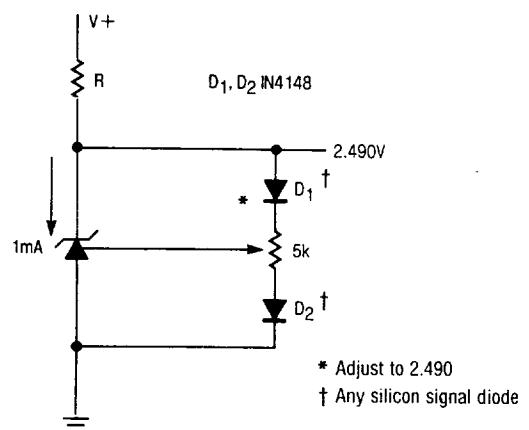


Note 1: The LT1009 is an improved, low cost, pin for pin replacement for the "A" and "B" versions. For further information consult the LT1009 data sheet.

Figure 1


LM136-2.5/LM336-2.5

TYPICAL PERFORMANCE CHARACTERISTICS


Reverse Characteristics

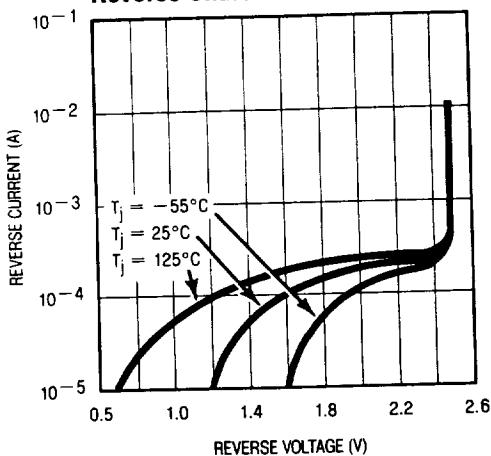


Forward Characteristics

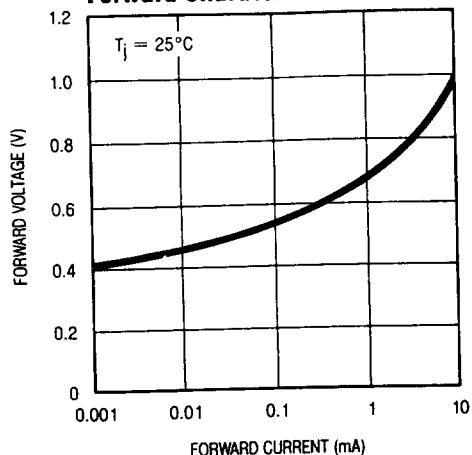


Temperature Drift

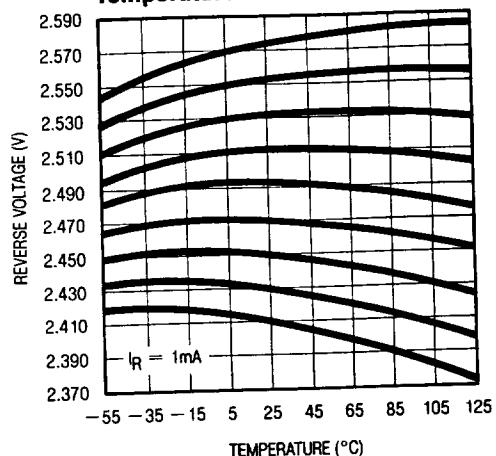


Dynamic Impedance

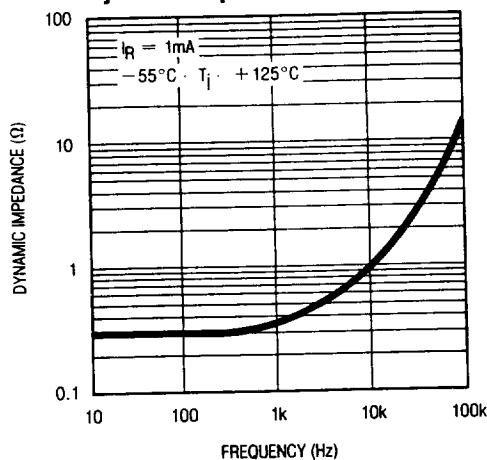

Zener Noise Voltage

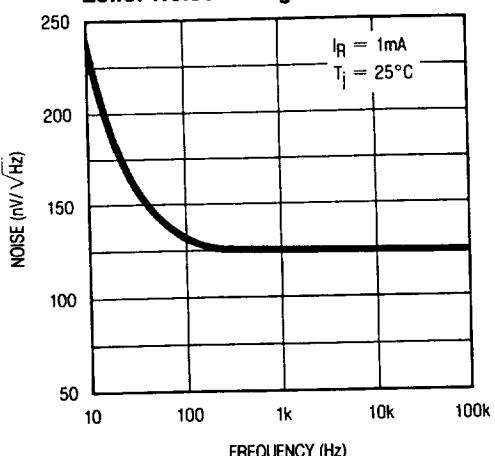


Response Time

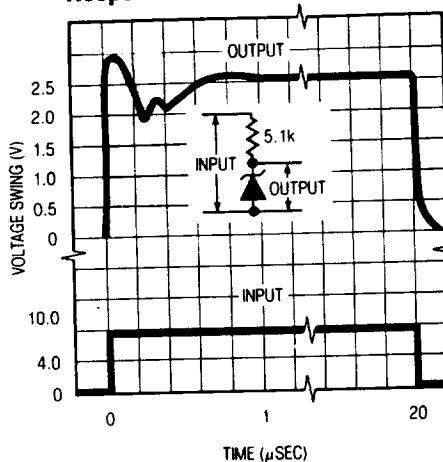

3


SCHEMATIC DIAGRAM

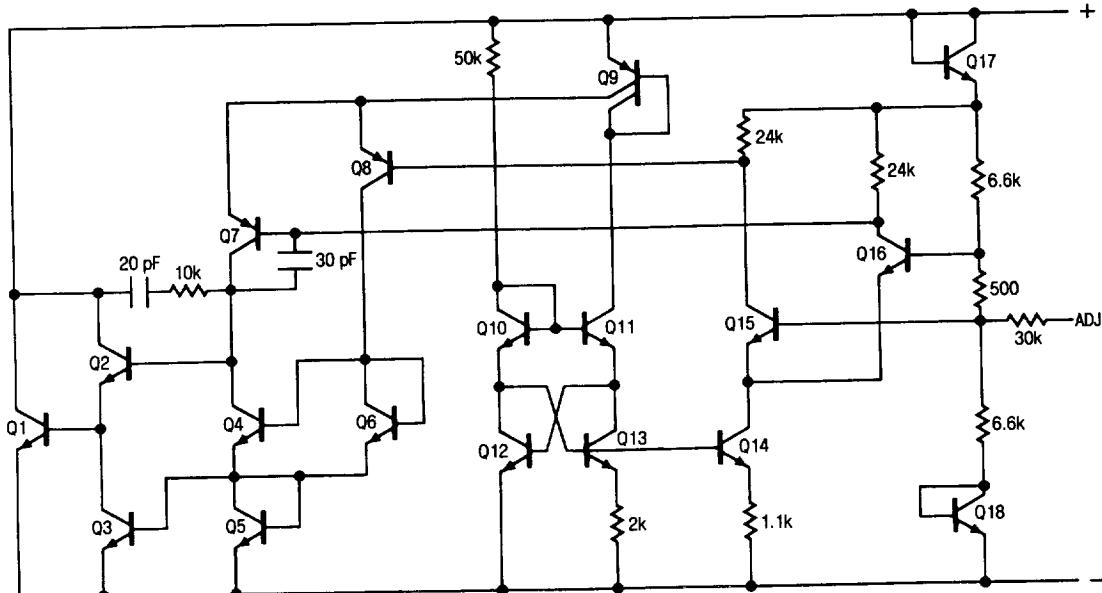


LM136-2.5/LM336-2.5

TYPICAL APPLICATIONS


Wide Supply Range, Reference

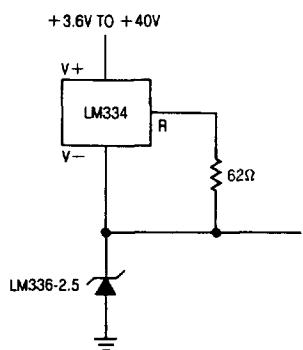


Switchable $\pm 1.25\text{V}$ Bipolar Reference

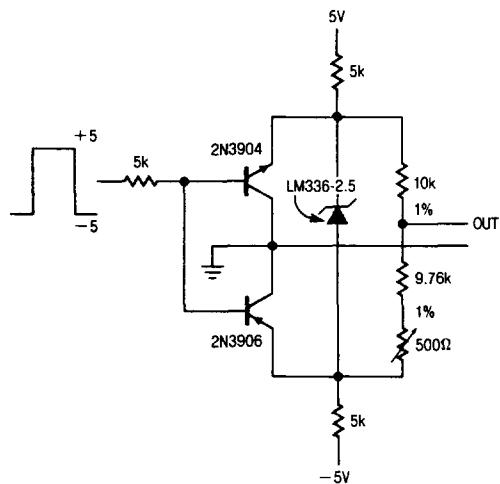

Low Temperature Coefficient Power Regulator

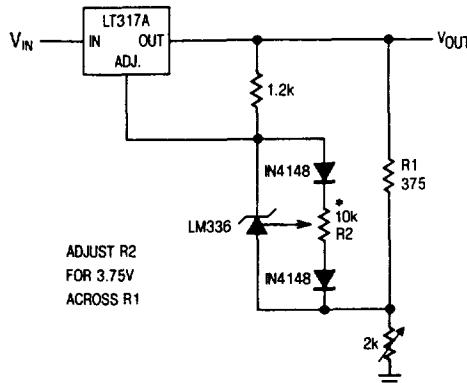


Low Noise 2.5V Buffered Reference

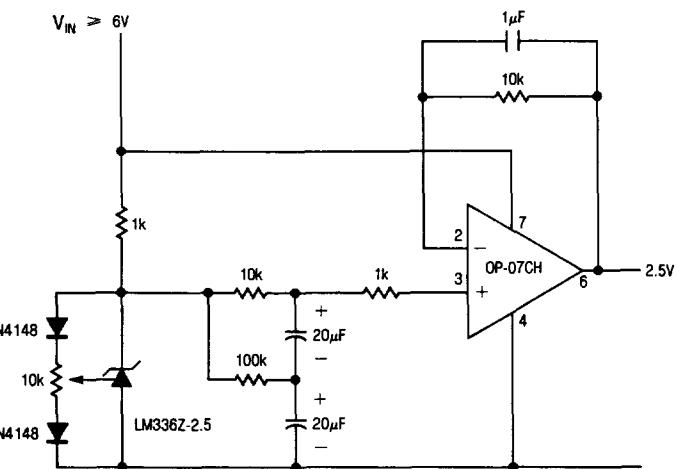


PACKAGE DESCRIPTION

H Package, 3 Lead TO-46 Metal Can

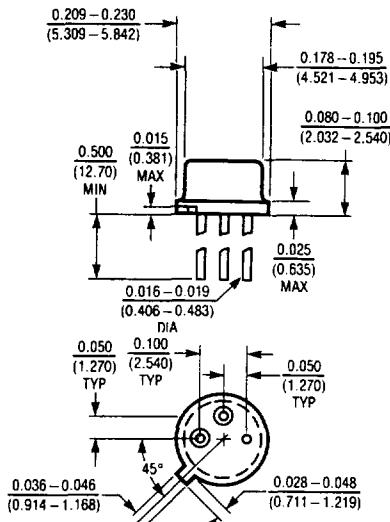

T _j max	θ _{ja}	θ _{jc}
150°C	440°C/W	80°C/W

Z Package, 3 Lead TO-92 Plastic

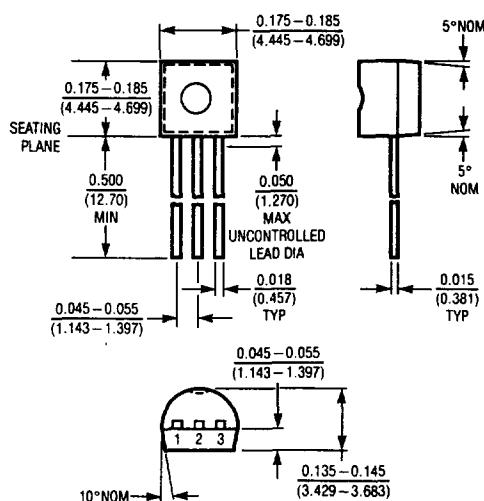

T_g max	Θ_{la}
100°C	160°C/W